

Yolculuk Bizimle Başlar!

DOMETIC Whale

BABARVY ALKO Eberspächer

LIPPERT Truma indelB

THULE SWEDEN victron energy BLUE POWER

SOLARA CBE Fischer Panda

THETFORD ARANA

COMET SMART • EQUIPMENT • SOLUTIONS ACRYFORM PLASTOFORM autoterm

POLYPLASTIC Linetech ECOFLOW Bio

ABL SANJO ilse REICH jokon Competence in Lighting

FIAMMA EP Kampa



Markalar üzerine tıklayarak ilgili kataloğa ulaşabilirsiniz.

↔️ DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)


SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

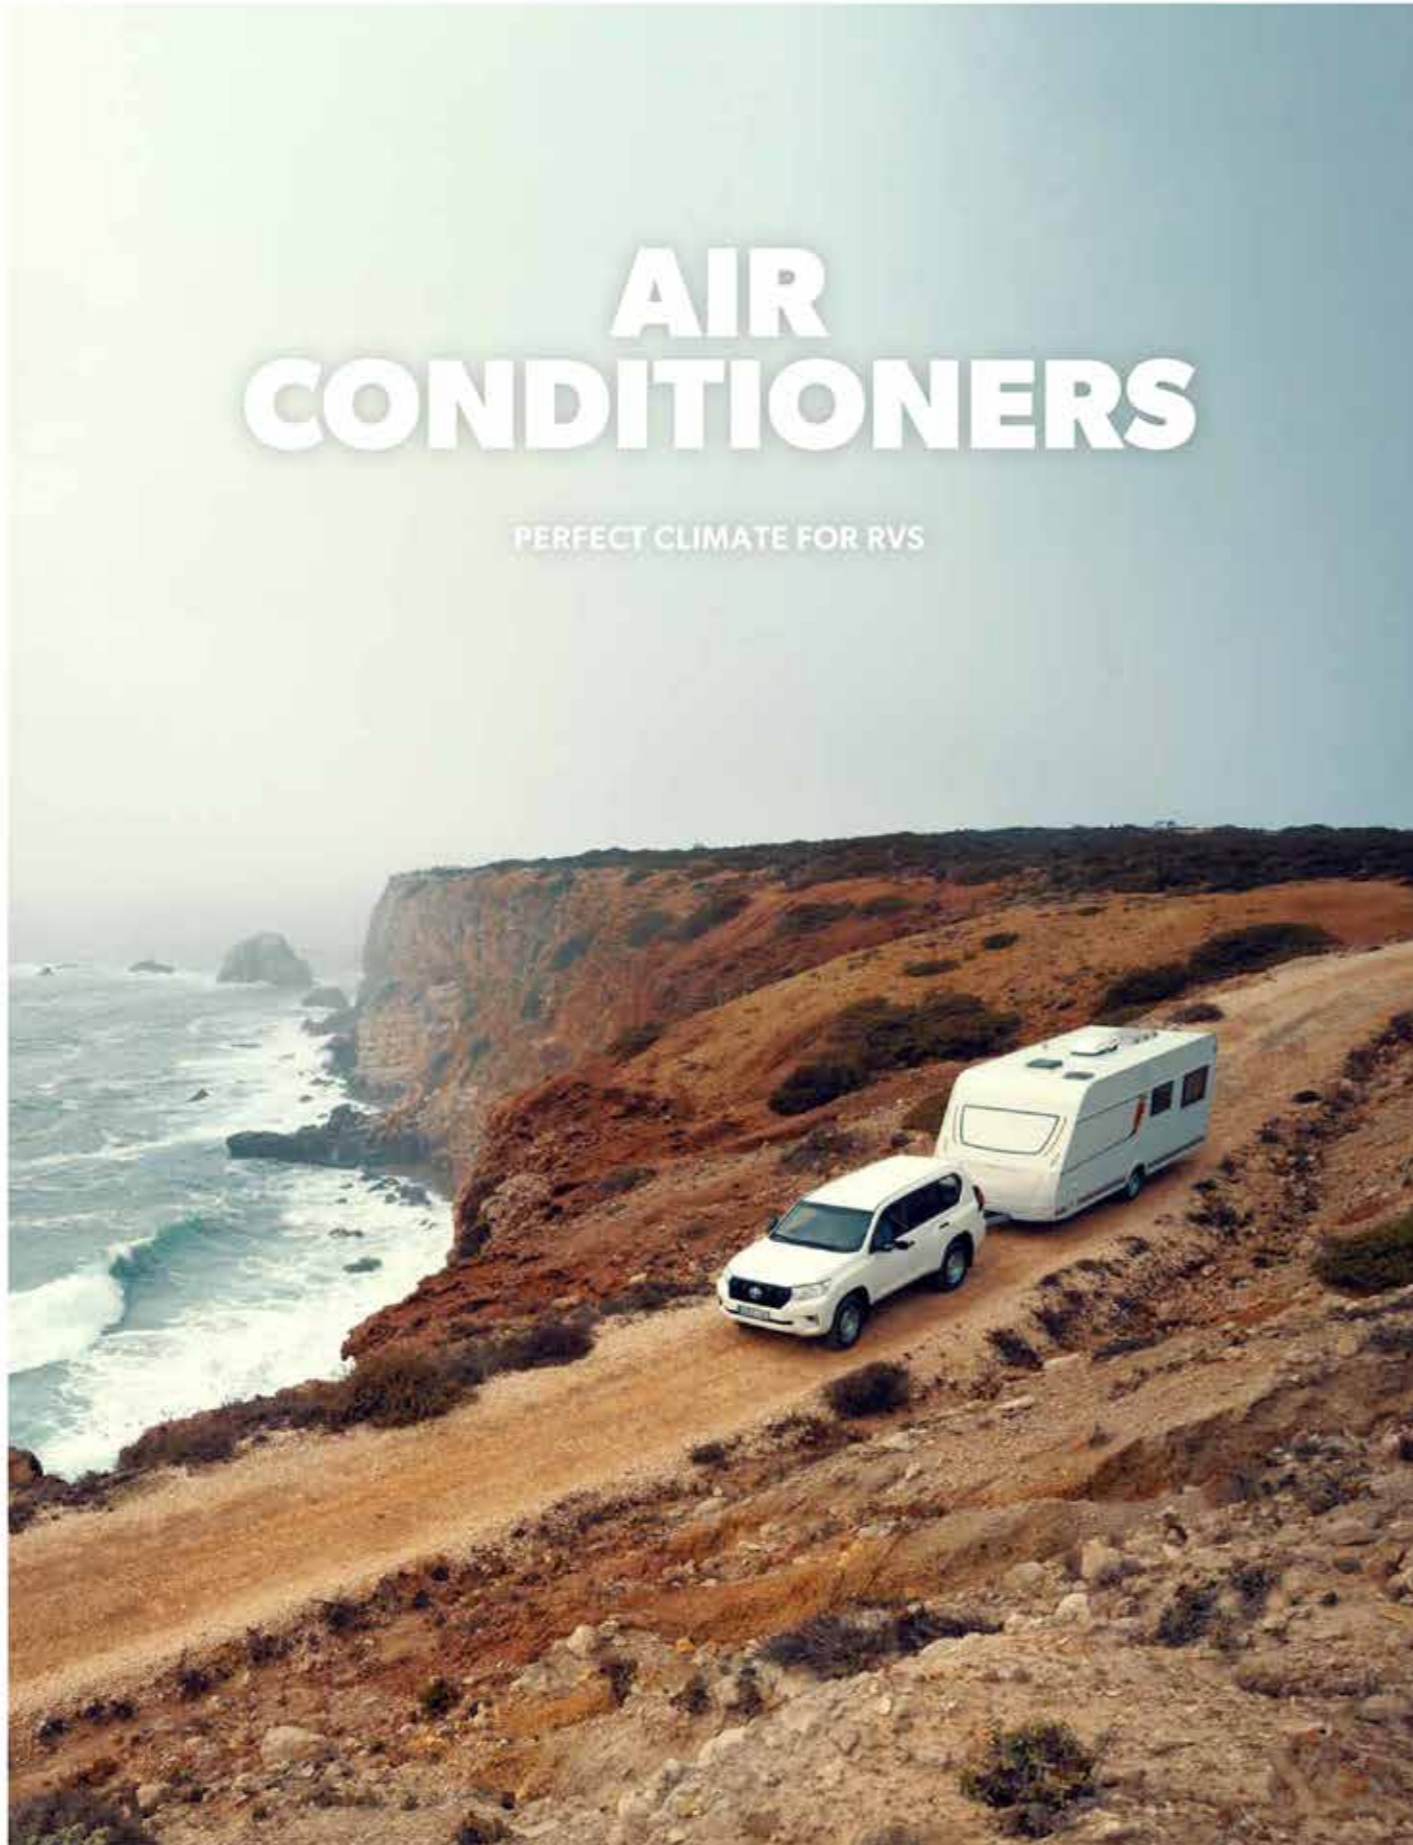

ROOFTOP AIR CONDITIONERS

Space-saving installation on the roof: air conditioner replaces the roof window. The Dometic FreshJet range includes models for every size of RV. Our FreshLight model integrates a window for natural light from above.



UNDER-BENCH AIR CONDITIONER

Installation in a storage compartment – the vehicle's roof load, outside dimensions and centre of gravity are not affected. Our FreshWell 3000 model comes with energy-efficient heat pump technology for cooling and heating.



ACCESSORIES FOR AIR CONDITIONERS

Our DC kits enable operation while driving. Their high-quality inverter generates a pure sine wave voltage – for supplying air conditioners or other electrical devices. Remote control included as standard.



DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



Installation on the roof or in a storage compartment

Recreational vehicles offer two places where the installation of an air conditioner makes sense from a technical and practical point of view: on the roof or in the storage compartment. The Dometic range provides well-engineered solutions for all installation conditions.

Roof air conditioners use the physical principle that cold air sinks. The cold air streams can be directed into the vehicle's living area in an energy-saving manner and without performance loss.

Roof air conditioners typically replace the roof window. For those who don't want to sacrifice the roof light, we recommend our FreshLight model, which integrates a window.

Under-bench air conditioners are fitted in the storage compartment – ideal for applications where installation on the roof is out of the question. The air is distributed through air outlets, which can be placed in the room as required to get a tailor-made climate control solution.

Overview* of air conditioners by vehicle type and lengths





AIR CONDITIONER	Roof air conditioners FreshJet				Roof air conditioner with window FreshLight	Under-bench air conditioner FreshWell
	Fj 1700	Fj 2000	Fj 2200	Fj 3000	FL 2200	FW 3000
CARAVANS						
6 m	•	-	-	-	-	-
7 m	-	•	•	•	•	•
8 m	-	-	•	•	-	-
from 8 m	-	-	-	•	-	-
MOTORHOMES						
6 m	•	•	•	•	•	•
7 m	-	•	•	•	•	•
8 m	-	-	-	•	-	-
from 8 m	-	-	-	•	-	-
PANEL VAN						
6 m	•	-	-	-	-	-
6.50 m	-	-	-	-	-	-

*The overview features typical recommendations ideal for vehicles. The classes of air conditioners may vary according to the vehicle type and insulation.

Dometic FreshJet 1700

Roof air conditioner for vehicles up to 6 m in length, 1700 W



Best for vehicle length	max. 6 m
Cooling capacity	1700 W / 5800 Btu/h
Heating capacity	800 W
Consumption	
Cooling	620 W
Heating mode	800 W
Input voltage	230 V AC / 50 Hz
Current consumption	
Cooling	2.7 A
Heating mode	3.5 A
Required circuit protection	
Cooling	4 A
Heating mode	4 A
Refrigerant	R407c
CO₂ equivalent	0.545 kg
Global warming potential (GWP)	1774
Dimensions (W x H x D)	
External	562 x 225 x 787 mm
Internal	470 x 45 x 555 mm
Roof opening (W x D)	400 x 400 mm
Roof thickness	25 – 60 mm
Weight	30 kg
Quality Features	<ul style="list-style-type: none"> • Ultra-compact and lightweight design • Cool and dehumidify air at the touch of a button • Efficient air distribution in two directions
/ Air distribution box	
Number of air vents	2 (front/rear)
Air vent functions	Continuous air flow regulation for all vents
Number of blower speeds	4
Remote control	•
Test marks	E-approved to EMC / automotive directive
Product	Ref. No.
Dometic FreshJet 1700	9105306658
/ Optional extras	
Adapter frame for the FreshJet models in roof openings which exceed the standard opening size of 400 x 400 mm	9103500476
Adapter frame for air conditioners or roof lights on a trapezoidal sheet metal roof	9104114007
Dometic DC Kit DSP-T 12, 12 V	9600007286
Dometic DC Kit DSP-T 24, 24 V	9600007287

Dometic FreshJet 2000

Roof air conditioner for campervans, 2000 W

2.13

	Best for vehicle length	max. 6.5 m
	Cooling capacity	2000 W / 6825 Btu/h
	Heating capacity	1200 W
	Consumption	
	Cooling	940 W
	Heating mode	1200 W
	Input voltage	230 V AC / 50 Hz
	Current consumption	
	Cooling	4.1 A
	Heating mode	5.2 A
	Required circuit protection	
	Cooling	5 A
	Heating mode	6 A
	Refrigerant	R407c
Refrigerant quantity	0.520 kg	
CO₂ equivalent	0.92248 t	
Global warming potential (GWP)	1774	
Dimensions (W x H x D)		
External	562 x 225 x 787 mm	
Internal	470 x 45 x 555 mm	
Roof opening (W x D)	400 x 400 mm	
Roof thickness	25 – 60 mm	
Weight	32 kg	
Quality Features	<ul style="list-style-type: none"> Ultra-compact and lightweight design Cool and dehumidify air at the touch of a button Efficient air distribution in four directions 	
/ Air distribution box		
Number of air vents	4 (left / right / front / rear)	
Air vent functions	Continuous air flow regulation for all vents	
Number of blower speeds	4	
Remote control	•	
Test marks	E-approved to EMC / automotive directive	
Product	Ref. No.	
Dometic FreshJet 2000	9600025737	
/ Optional extras		
Adapter frame for the FreshJet models in roof openings which exceed the standard opening size of 400 x 400 mm	9103500476	
Adapter frame for air conditioners or roof lights on a trapezoidal sheet metal roof	9104114007	
Dometic DC Kit DSP-T 12, 12 V	9600007286	
Dometic DC Kit DSP-T 24, 24 V	9600007287	

Dometic FreshJet 2200

Roof air conditioner for vehicles up to 7 m in length, 2200 W





2.13

	Best for vehicle length	max. 7 m
	Cooling capacity	2200 W / 7500 Btu/h
	Heating capacity	1200 W
	Consumption	
	Cooling	950 W
	Heating mode	1200 W
	Input voltage	230 V AC / 50 Hz
	Current consumption	
	Cooling	4.1 A
	Heating mode	5.2 A
	Required circuit protection	
	Cooling	5 A
	Heating mode	6 A
	Refrigerant	R407c
Refrigerant quantity	0.520 kg	
CO₂ equivalent	0.92248 t	
Global warming potential (GWP)	1774	
Dimensions (W x H x D)		
External	562 x 225 x 787 mm	
Internal	470 x 45 x 555 mm	
Roof opening (W x D)	400 x 400 mm	
Roof thickness	25 – 60 mm	
Weight	32 kg	
Quality Features	<ul style="list-style-type: none"> Ultra-compact and lightweight design Cool and dehumidify air at the touch of a button Efficient air distribution in two directions 	
/ Air distribution box		
Number of air vents	2 (front / rear)	
Air vent functions	Continuous air flow regulation for all vents	
Number of blower speeds	4	
Remote control	•	
Test marks	E-approved to EMC / automotive directive	
Product	Ref. No.	
Dometic FreshJet 2200	9105306515	
Dometic FreshJet 2200 grey	9600025788	
/ Optional extras		
Adapter frame for the FreshJet models in roof openings which exceed the standard opening size of 400 x 400 mm	9103500476	
Adapter frame for air conditioners or roof lights on a trapezoidal sheet metal roof	9104114007	
Dometic DC Kit DSP-T 12, 12 V	9600007286	
Dometic DC Kit DSP-T 24, 24 V	9600007287	

Dometic FreshJet 3000

Roof air conditioner for vehicles over 7 m in length, 2516 W


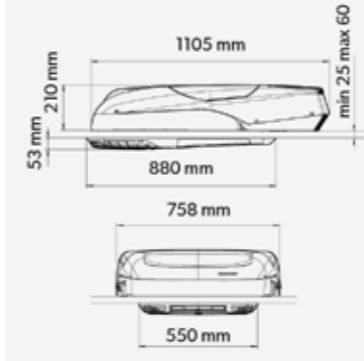
2.13

	Best for vehicle length	from 7 m
	Cooling capacity	594 W to 2516 W
	Heating capacity	898 W to 3107 W (Maximum heating capacity heat pump capacity)
	Consumption	
	Cooling	1300 W
	Heat pump	1350 W
	Input voltage	230 V AC / 50 Hz
	Current consumption	
	Cooling	2.3 to 8.0 A
	Heating	2.3 to 7.4 A
	Required circuit protection	
	Cooling	10 A
	Heating	10 A
	Refrigerant	R410a
	Refrigerant quantity	0.650 kg
	CO₂ equivalent	1.357 t
	Global warming potential (GWP)	2088
	Dimensions (W x H x D)	
	External	665 x 240 x 997 mm
	Internal	518 x 48 x 579 mm
	Roof opening (W x D)	400 x 400 mm or 360 x 360 mm
	Roof thickness	25 – 60 mm
	Weight	34 kg
	Quality Features	<ul style="list-style-type: none"> Patented dual-cylinder inverter compressor reduces vibration and noise Cool, warm or dehumidify air at the touch of a button Low start-up current ensuring easy start up even with low electrical protection Connectivity with CI-BUS compatible control panels Super-bright LED lights in the air distribution box can be activated via the remote control
	/ Air distribution box	
	Number of air vents	2 (front/rear)
	Air vent functions	Continuous air flow regulation for all vents
	Number of blower speeds	4
	Remote control	•
	Test marks	E-approved to EMC / automotive directive
Product	Ref. No.	
Dometic FreshJet 3000		9600026626
	/ Optional extras	
	Adapter frame for the FreshJet models in roof openings which exceed the standard opening size of 400 x 400 mm	
Adapter frame for air conditioners or roof lights on a trapezoidal sheet metal roof		9104114007

Dometic FreshLight 2200

Roof air conditioner with window for vehicles up to 7 m, 2050 W


2.10

	Best for vehicle length	max. 7 m	
	Cooling capacity	2050 W / 7500 Btu/h	
	Heating capacity	2700 W (Maximum heating capacity heat pump capacity)	
	Consumption		
	Cooling	950 W	
	Heat pump	1200 W	
	Input voltage	230 V AC / 50 Hz	
	Current consumption		
	Cooling	4.1 A	
	Heating	5.2 A	
	Required circuit protection		
	Cooling	5 A	
	Heating	6 A	
	Refrigerant	R407c	
	Refrigerant quantity	0.560 kg	
	CO₂ equivalent	0.9934 t	
	Global warming potential (GWP)	1774	
	Dimensions (W x H x D)		
	External	758 x 210 x 1105 mm	
	Internal	550 x 53 x 880 mm	
	Roof opening (W x D)	400 x 700 mm	
	Roof thickness	25 – 60 mm	
	Weight	44.50 kg	
	Quality Features	<ul style="list-style-type: none"> Temperature and blower speed can be conveniently set by remote control Control panel with integrated, dimmable LED lights Individual air flow regulation with automatic blower control Energy-efficient cooling mode and heat pump system for heating mode Roof window with active ventilation system and single-pleated darkening screen 	
	/ Air distribution box		
	Number of air vents	2 (front/rear)	
	Air vent functions	Continuous air flow regulation for all vents	
	Number of blower speeds	4	
	Remote control	•	
	Test marks	E-approved to EMC / automotive directive	
Product	Ref. No.		
Dometic FreshLight 2200		9102900165	
	/ Optional extras		
	Protective cover		9103500237
	Dometic DC Kit DSP-T 12, 12 V		9600007286
Dometic DC Kit DSP-T 24, 24 V		9600007287	

Dometic FreshWell 3000

Under-bench air conditioner for vehicles up to 8 m in length, 2700 W

2.13



Best for vehicle length	max. 8 m
Cooling capacity	2700 W / 9200 Btu/h
Heating capacity	3000 W Maximum heating capacity = heat pump capacity plus heating resistor capacity
Consumption	
Cooling	990 W
Heat pump	1100 W
Input voltage	230 V AC / 50 Hz
Current consumption	
Cooling	4.3 A
Heating	4.8 A
Required circuit protection	
Cooling	5 A
Heating	5 A
Refrigerant	R410a
Refrigerant quantity	0.600 kg
CO₂ equivalent	1.2528 t
Global warming potential (GWP)	2088
Dimensions (W x H x D)	400 x 286 x 628 mm
Weight	21 kg
Quality Features	<ul style="list-style-type: none"> Under-bench position means the vehicle's height is unaffected Can be operated even while driving. Low noise air circulation Lightweight and compact unit Soft start function
/ Air distribution box	
Number of air vents	3 air outlets
Air vent functions	3 air outlets (optional) to be placed centrally or where required
Number of blower speeds	3
Remote control	•
Test marks	E-approved to EMC / automotive directive
Product	Ref. No.
Dometic FreshWell 3000	9105306670
/ Optional extras	
Dometic DC Kit DSP-T 12, 12 V	9600007286
Dometic DC Kit DSP-T 24, 24 V	9600007287

Required accessories for individual air distribution (FreshWell 3000)

	Curve 90°, ø 60 mm	9100300015
	Air outlet grill kit 3-pieces, ø 60 mm	9100300077
	Circular air inlet grill 2 pieces, ø 190 mm	9100300018
	Flexible hose ø 60 mm x 10 m	9100300019
	Rectangular air inlet grill 240 x 240 mm	9100300017



DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)





Far more than “just” a converter

Our two DC kits integrate a high-quality inverter that generates a pure sine wave voltage to supply the air conditioner or other electrical devices during the journey. DC Kit DSP-T 12 is for vehicles with 12-volt batteries, DC Kit DSP-T 24 for vehicles with 24-volt batteries. Both comfort kits can be used with all Dometic air conditioner models (except FreshJet 3000). Features and functions include a charging current distributor with low-voltage protection, a priority circuit for 230-volt mains operation, and the Dometic DSP-RCT remote control for all basic functions (ON/OFF/stand-by).

Dometic DC Kit DSP-T 12 / DC Kit DSP-T 24

DC extension kits for Dometic air conditioners, 12 V or 24 V

	DC KIT DSP-T 12	DC KIT DSP-T 24
	Power consumption (12 V DC)^{*1}	30 – 113 A
	Recommended generator capacity^{*2}	>150 A
	Recommended total battery capacity^{*3}	> 250 Ah
	Continuous output	1,800 W
	Size Inverter (W x H x D)	284 x 118 x 405 mm
	Scope of delivery	
	Sinewave inverter	•
	Mains priority circuit	•
	Remote control, control cable	7.5 m
	2 battery cables, 1.5 m long	35 mm ²
	230-volt connection cable	2 pieces
	Charging current distributor with power relay	•
	/ Compatible with Dometic air conditioners	
	FreshLight 2200	•
	FreshJet 1700	•
	FreshJet 2000	•
	FreshJet 2200	•
	FreshWell 3000	•
	^{*1} Power consumption depends on the type of air conditioner and ambient temperatures.	
	^{*2} Generator capacity depends on the type of air conditioner and ambient temperatures.	
	^{*3} Total battery capacity depends on the type of air conditioner and ambient temperatures.	
Product	Ref. No.	
Dometic DC Kit DSP-T 12, 12 V	9600007286	
Dometic DC Kit DSP-T 24, 24 V	9600007287	

↔️ DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



SUN PROTECTION AND MORE

PERFECT CLIMATE FOR RVS



WALL MOUNTED AWNINGS

The PerfectWall series gives you a wide choice of wall awnings to suit vehicles of all sizes. For manual crank operation or with a 12-volt electric motor. There's also a range of easy-to-install bag awnings.



ROOF MOUNTED AWNINGS

Here again, you can choose from a huge range. PerfectRoof roof awnings come in many sizes and configurations. You will find models for manual crank operation or with a 12-volt electric motor.



CONFIGURATION GUIDE

Complete awning solutions for all commonly used panel vans. Our configuration guide gives you a quick overview of all basic components as well as the available accessories.



AWNING ACCESSORIES

Besides matching adapters for all common vehicle models, our accessory range includes smart solutions for sun, rain and privacy protection, LED lighting and more. You can also add front walls, side walls or complete tents to create an extra room in front of the vehicle.

THE PERFECT AWNING FOR EVERY TYPE OF VEHICLE

All important features at a glance



	BAG AWNING	WALL MOUNTED AWNINGS		ROOF MOUNTED AWNINGS	
	REVO ZIP	PW 1100	PW 1500	PR 2000	PR 2500
Length	2.00 – 4.50 m	2.60 – 4.50 m	3.50 – 6.00 m	2.65 – 4.50 m	3.50 – 6.00 m
Extension	1.45 – 2.50 m	2.00 – 2.50 m	2.75 m	2.00 – 2.50 m	2.75 m
Weight	7.3 – 15.9 kg	20 – 32 kg	25 – 48 kg	19 – 31 kg	27 – 45 kg
Case colour options	White	White / anthracite	White / anthracite /	White / anthracite	White / anthracite
Fabric colour options	Grey	Horizon Grey	Horizon Grey	Horizon Grey	Horizon Grey
Support legs (integrated in the front rail)	✓	✓	✓	✓	✓
12-volt motor incl. remote control	-	-	✓	-	✓
Aluminium end caps	-	-	✓	-	✓
Telescopic crank	-	✓	-	✓	-
Sun & Rain Protect	-	Accessory	Accessory	Accessory	Accessory
LED profile	-	Accessory	Accessory	-	-
Tie Down Kit	Scope of delivery	Accessory	Accessory	Accessory	Accessory
CampRoom* / PrivacyRoom	Accessory	Accessory	Accessory	Accessory	Accessory

* Special CampRoom for Ducato vehicles available




Manual or with a motor

Our manual awnings are operated with a crank, which is included in the delivery kit. PW 1500 and PR 2500 come standard with a 12 V motor operated by remote control.



Remote control

All electric awnings come standard with a remote control for convenient operation at the touch of a button.

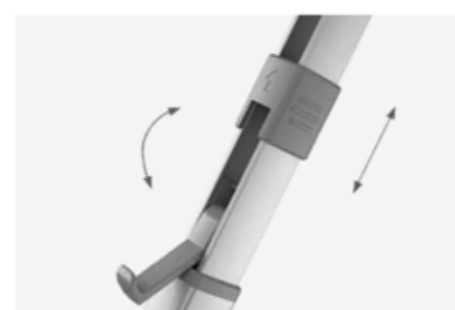

New patented easy lock flipper

Secures the support legs in place – no accidental unlocking possible




Compact Housing

The size of the awning depends on the vehicle length and weight is another factor that needs to be taken into account. The longer the awning is the heavier it will be, of course. The spectrum ranges from 7.3 kg for the smallest models to 58.5 kg for the big ones. That means Dometic awnings are still lighter and more compact than comparable products of our competitors.



Aluminium end caps

The end caps of most Dometic awnings are made of 100% aluminium. Consequently, the Dometic awning is more resistant against shock and impact. End cap is painted in housing colour. (PW 1500, PR 2500)

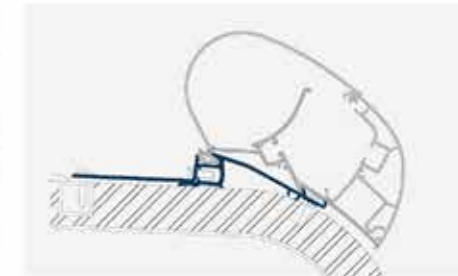

Awning adapters

Vehicle walls and roofs are, among other things, design elements. That means they can have different shapes. With a comprehensive range of adapters Dometic ensures that the vehicle and the awning are perfectly coordinated, so you will get impeccable installation results.



Accessories

Our accessory range gives you a whole world of possibilities. For example, you can add side walls for additional protection, or complete awning tents to get an extra room in front of your vehicle.



Telescopic crank

The telescopic crank is included for all manual awnings. It can be easily adjusted to the vehicle height for ergonomic handling, or retracted for space-saving storage.



Fabric

Our awnings are made from a high-quality PVC material. UV-resistant, rot-proof and washable, it has all it takes for a long life expectancy. The awning is made from one whole piece of fabric, so there are no seams.



Housing colours

The Dometic awnings are available in two housing colours.

Dometic Rev Zip Roll Out Awning

2.09

Bag awning for caravans and motorhomes


	Description	Simply slide this bag awning into the existing tent rail of your caravan or motorhome. No drilling or bolts needed! Once fitted, it can be rolled out in a few minutes – and packed away again just as quickly.
	Quality Features	<ul style="list-style-type: none"> • Quick and simple installation without drilling – simply slides into the tent rail of the caravan or motorhome • Set-up and take-down in a matter of minutes – legs and roof rafters fold out of front rail • High-quality, durable awning fabric – 500 g/m² weatherproof and colourfast with anti-scratch coating • Extra strong, adjustable aluminium frame • Frees up interior storage space as the awning stays connected on the outside

LENGTH (M)	EXTENSION (M)	HOUSING COLOUR	FABRIC COLOUR	REF. NO.
2.00	1.45	WHITE	GREY	9103104298
2.40	1.85	WHITE	GREY	9103104299
2.70	2.15	WHITE	GREY	9103104300
3.10	2.50	WHITE	GREY	9103104301
3.50	2.50	WHITE	GREY	9103104302
4.00	2.50	WHITE	GREY	9103104303
4.50	2.50	WHITE	GREY	9103104304

Dometic PerfectWall PW 1100

2.09

Wall mounted awning


	Quality Features	<p>This compact and robust wall awning offers several patented features for easy setup and handling. It is integrated in a newly designed, shapely housing.</p> <ul style="list-style-type: none"> • Newly designed, shapely awning housing with no visible screws • New, patented slide-out support legs for convenient handling • Patented tension rafter can be stowed in the front rail to save space (awnings of 4 m or longer) • Patented Easy Lock Flipper to secure the support legs
---	-------------------------	--

LENGTH (M)	EXTENSION (M)	HOUSING COLOUR	FABRIC COLOUR	REF. NO.
2.60	2.00	WHITE	GREY HORIZON	9103104400
3.00	2.50	WHITE	GREY HORIZON	9103104401
3.50	2.50	WHITE	GREY HORIZON	9103104402
4.00	2.50	WHITE	GREY HORIZON	9103104403
4.50	2.50	WHITE	GREY HORIZON	9103104404
2.60	2.00	ANTHRACITE	GREY HORIZON	9103104405
3.00	2.50	ANTHRACITE	GREY HORIZON	9103104406
3.50	2.50	ANTHRACITE	GREY HORIZON	9103104407
4.00	2.50	ANTHRACITE	GREY HORIZON	9103104408
4.50	2.50	ANTHRACITE	GREY HORIZON	9103104409

Dometic PerfectWall PW 1500

2.09

Wall mounted awning

	Description	This robust electric wall awning is ideally suited for large vehicles. It comes standard with a 12 V motor operated by remote control. The patented automatic front rail allows it to slide in and out smoothly.
	Quality Features	<ul style="list-style-type: none"> • Aluminium end caps, resistant to shock and impact • Patented locks on both sides of the front rail – for perfect closing • High-quality awning fabric made of one piece – no welding seam • Support legs with patented Easy Lock Flipper

DOMETIC PERFECTWALL PW 1500 12 V AWNING

LENGTH (M)	EXTENSION (M)	HOUSING COLOUR	FABRIC COLOUR	REF. NO.
3.50	2.75	WHITE	GREY HORIZON	9103104413
4.00	2.75	WHITE	GREY HORIZON	9103104414
4.50	2.75	WHITE	GREY HORIZON	9103104415
5.00	2.75	WHITE	GREY HORIZON	9103104416
5.50	2.75	WHITE	GREY HORIZON	9103104417
6.00	2.75	WHITE	GREY HORIZON	9103104418
3.50	2.75	ANTHRACITE	GREY HORIZON	9103104419
4.00	2.75	ANTHRACITE	GREY HORIZON	9103104420
4.50	2.75	ANTHRACITE	GREY HORIZON	9103104421
5.00	2.75	ANTHRACITE	GREY HORIZON	9103104422
5.50	2.75	ANTHRACITE	GREY HORIZON	9103104423
6.00	2.75	ANTHRACITE	GREY HORIZON	9103104424



CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION


[Sanitation](#)

[Cleaning Accessories](#)

Dometic PerfectRoof PR 2000

2.09

Roof mounted awning

		PR 2000
	Description	Small and compact: the perfect roof mount awning for panel vans and small caravans.
	Quality Features	<ul style="list-style-type: none"> Lightweight and compact dimensions – flattest roof awning in the market Ideal for panel vans and small caravans Plastic end caps High-quality awning fabric made of one piece – no welding seam Support legs with patented Easy Lock Flipper


DOMETIC PERFECTROOF PR 2000 MANUAL AWNING

LENGTH (M)	EXTENSION (M)	HOUSING COLOUR	FABRIC COLOUR	REF. NO.
2.65	2.00	WHITE	GREY HORIZON	9103104425
3.00	2.50	WHITE	GREY HORIZON	9103104426
3.25	2.50	WHITE	GREY HORIZON	9103104427
3.50	2.50	WHITE	GREY HORIZON	9103104428
3.75	2.50	WHITE	GREY HORIZON	9103104429
4.00	2.50	WHITE	GREY HORIZON	9103104430
4.50	2.50	WHITE	GREY HORIZON	9103104431
2.65	2.00	ANTHRACITE	GREY HORIZON	9103104432
3.00	2.50	ANTHRACITE	GREY HORIZON	9103104433
3.25	2.50	ANTHRACITE	GREY HORIZON	9103104434
3.50	2.50	ANTHRACITE	GREY HORIZON	9103104435
3.75	2.50	ANTHRACITE	GREY HORIZON	9103104437
4.00	2.50	ANTHRACITE	GREY HORIZON	9103104436
4.50	2.50	ANTHRACITE	GREY HORIZON	9103104438

Dometic PerfectRoof PR 2500

2.09

Roof mounted awning

		PR 2500
	Description	For vehicles of 4.50 m and over, this is one of the most compact awning solutions you'll find. It comes standard with a 12 V motor operated by remote control. With a patented locking system, it is lightweight yet incredibly robust and durable.
	Quality Features	<ul style="list-style-type: none"> Aluminium end caps, resistant to shock and impact High-quality awning fabric made of one piece – no welding seam Support legs with patented Easy Lock Flipper

DOMETIC PERFECTROOF PR 2500 12 V AWNING

LENGTH (M)	EXTENSION (M)	HOUSING COLOUR	FABRIC COLOUR	REF. NO.
3.50	2.75	WHITE	GREY HORIZON	9103104442
3.75	2.75	WHITE	GREY HORIZON	9103104443
4.00	2.75	WHITE	GREY HORIZON	9103104444
4.50	2.75	WHITE	GREY HORIZON	9103104445
5.00	2.75	WHITE	GREY HORIZON	9103104446
5.50	2.75	WHITE	GREY HORIZON	9103104447
6.00	2.75	WHITE	GREY HORIZON	9103104448
3.50	2.75	ANTHRACITE	GREY HORIZON	9103104449
3.75	2.75	ANTHRACITE	GREY HORIZON	9103104450
4.00	2.75	ANTHRACITE	GREY HORIZON	9103104451
4.50	2.75	ANTHRACITE	GREY HORIZON	9103104452
5.00	2.75	ANTHRACITE	GREY HORIZON	9103104453
5.50	2.75	ANTHRACITE	GREY HORIZON	9103104454
6.00	2.75	ANTHRACITE	GREY HORIZON	9103104455



AWNINGS FOR PANEL VANS

DOMETIC PERFECTROOF PR 2000 CONFIGURATION GUIDE

Complete awning solutions for panel vans



NO.	AWNING LENGTH	REF. NO.	FABRIC	CASE COLOUR	ADAPTER	FOAM STRIP
PR 2000 DUCATO H2 (2006-...)						
1.1	3.25 m	9103104434	GR HOR	Anthracite	9103103890	9103104207
1.2	3.75 m	9103104436	GR HOR	Anthracite	9103103890	9103104207
1.3	4.0 m	9103104437	GR HOR	Anthracite	9103103890	9103104207
PR 2000 DUCATO WITH SKY ROOF H2 (2006-...)						
2.1	3.25 m	9103104434	GR HOR	Anthracite	9103104378	9103104207
2.2	3.75 m	9103104436	GR HOR	Anthracite	9103104378	9103104207
2.4	4.0 m	9103104437	GR HOR	Anthracite	9103104378	9103104207
PR 2000 DUCATO WITH ROOF RAIL H2 (2006-...)						
3.1	3.25 m	9103104434	GR HOR	Anthracite	9103104379	9103104207
3.2	3.75 m	9103104436	GR HOR	Anthracite	9103104379	9103104207
3.3	4.0 m	9103104437	GR HOR	Anthracite	9103104379	9103104207
PR 2000 DUCATO HIGH ROOF H3 (2006-...)						
4.1	3.50 m	9103104435	GR HOR	Anthracite	9103104205	9103104207
4.2	4.0 m	9103104437	GR HOR	Anthracite	9103104205	9103104207
PR 2000 MERCEDES SPRINTER H2 (2018-...)						
5.1	3.25 m	9103104434	GR HOR	Anthracite	9103103908	9103104207
5.2	3.75 m	9103104436	GR HOR	Anthracite	9103103908	9103104207
5.3	4.0 m	9103104437	GR HOR	Anthracite	9103103908	9103104207
PR 2000 CRAFTER / MAN TGE RHT H2 (2017-...)						
7.1	3.25 m	9103104434	GR HOR	Anthracite	9103104206	9103104207
7.2	3.75 m	9103104436	GR HOR	Anthracite	9103104206	9103104207
7.3	4.0 m	9103104437	GR HOR	Anthracite	9103104206	9103104207
PR 2000 CRAFTER / MAN TGE LHT H2 (2017-...)						
8.1	3.25 m	9103104434	GR HOR	Anthracite	9103104250	9103104207
8.2	3.75 m	9103104436	GR HOR	Anthracite	9103104250	9103104207
8.3	4.0 m	9103104437	GR HOR	Anthracite	9103104250	9103104207

AWNINGS FOR PANEL VANS

The table below helps you to configure complete awning solutions for all commonly used panel vans. It gives you a quick overview of all basic components as well as the available accessories.

Simply choose the PR 2000 model in the required length and the adapter to match the vehicle you have. Don't forget to order a set of foam strip rolls for sealing the area between the awning and the vehicle. Once you've completed your basic order, add the required accessories.



TIE DOWN KIT	CAMPROOM FRONT	CAMPROOM SIDES	SUNPROTECT FRONT	SUN PROTECT SIDES	RAIN PROTECT FRONT	RAIN PROTECT SIDES
ACCESSORY						
9103104000	9103103925	9103103940	9103103942	9103103951	9103103955	9103103968
9103104000	9103103927	9103103940	9103103944	9103103951	9103103957	9103103968
9103104000	9103103928	9103103940	9103103945	9103103951	9103103958	9103103968
ACCESSORY						
9103104000	9103103925	9103103940	9103103942	9103103951	9103103955	9103103968
9103104000	9103103927	9103103940	9103103944	9103103951	9103103957	9103103968
9103104000	9103103928	9103103940	9103103945	9103103951	9103103958	9103103968
ACCESSORY						
9103104000	9103103925	9103103940	9103103942	9103103951	9103103955	9103103968
9103104000	9103103927	9103103940	9103103944	9103103951	9103103957	9103103968
9103104000	9103103928	9103103940	9103103945	9103103951	9103103958	9103103968
ACCESSORY						
9103104000	9103103925	9103103940	9103103942	9103103951	9103103955	9103103968
9103104000	9103103927	9103103940	9103103944	9103103951	9103103957	9103103968
9103104000	9103103928	9103103940	9103103945	9103103951	9103103958	9103103968
ACCESSORY						
9103104000	9103103925	9103103940	9103103942	9103103951	9103103955	9103103968
9103104000	9103103927	9103103940	9103103944	9103103951	9103103957	9103103968
9103104000	9103103928	9103103940	9103103945	9103103951	9103103958	9103103968

DOMETIC PERFECTWALL PW 1100 CONFIGURATION GUIDE

Complete awning solutions for panel vans



NO.	AWNING LENGTH	REF. NO.	FABRIC	CASE COLOUR	ADAPTER	FOAM STRIP
PW 1100 T6 MULTIVAN / POP ROOF						
9.1	2.6 m	9103104405	GR HOR	Anthracite	9103104118	9103104207
9.2	3.0 m	9103104406	GR HOR	Anthracite	9103104118	9103104207
PW 1100 DUCATO H3 (2006-...)						
10.1	3.5 m	9103104407	GR HOR	Anthracite	9103103875	N/R
10.2	4.0 m	9103104337	GR HOR	Anthracite	9103103875	N/R
PW1100 DUCATO H2 FOLDABLE ROOF (2006-...)/ IVECO DAILY (2014-...)						
11.1	3.0 m	9103104406	GR HOR	Anthracite	9103104263	9103104207
11.2	3.5 m	9103104407	GR HOR	Anthracite	9103104263	9103104207
11.3	4.0 m	9103104408	GR HOR	Anthracite	9103104263	9103104207
11.4	4.5 m	9103104409	GR HOR	Anthracite	9103104263	9103104207
PW 1100 JUMPY / EXPERT / PROACE RHT (2016-...)						
12.1	2.6 m	9103104405	GR HOR	Anthracite	9103104012	9103104207
12.2	3.0 m	9103104406	GR HOR	Anthracite	9103104012	9103104207
PW 1100 JUMPY / EXPERT / PROACE LHT (2016-...)						
13.1	2.6 m	9103104405	GR HOR	Anthracite	9103104011	9103104207
13.2	3.0 m	9103104406	GR HOR	Anthracite	9103104011	9103104207
PW 1100 VW T6 WITH "C" RAIL CHANNEL						
14.1	2.6 m	9103104405	GR HOR	Anthracite	9103104015	9103104207
PW 1100 VW T6 CALIFORNIA						
15.1	2.6 m	9103104405	GR HOR	Anthracite	9103104020	9103104207
PW 1100 VIVARO / TRAFFIC / TALENTO / NV300 (2006-...)						
17.1	2.6 m	9103104405	GR HOR	Anthracite	9103104103	9103104207
PW 1100 HYMER DUCATO POP ROOF						
19.1	3.75 m	9103104408	GR HOR	Anthracite	9600029421	9600049440

The table below helps you to configure complete awning solutions for all commonly used panel vans. It gives you a quick overview of all basic components as well as the available accessories.

Simply choose the PW 1100 model in the required length and the adapter to match the vehicle you have. Don't forget to order a set of foam strip rolls for sealing the area between the awning and the vehicle. Once you've completed your basic order, add the required accessories.



TIE DOWN KIT	CAMPROOM FRONT	CAMPROOM SIDES	SUNPROTECT FRONT	SUN PROTECT SIDES	RAIN PROTECT FRONT	RAIN PROTECT SIDES
ACCESSORY						
9103104000	9103103923	9103103933	9103103941	N/A	9103103954	N/A
9103104000	9103103924	9103103934	9103103942	9103103950	9103103955	9103103967
ACCESSORY						
9103104000	9103103926	9103103940	9103103943	9103103951	9103103956	9103103968
9103104000	9103103928	9103103940	9103103945	9103103951	9103103958	9103103968
ACCESSORY						
9103104000	9103103924	9103103940	9103103942	9103103951	9103103955	9103103968
9103104000	9103103926	9103103940	9103103943	9103103951	9103103956	9103103968
9103104000	9103103928	9103103940	9103103945	9103103951	9103103958	9103103968
9103104000	9103103929	9103103940	9103103946	9103103951	9103103959	9103103968
ACCESSORY						
9103104000	9103103923	9103103933	9103103941	N/A	9103103954	N/A
9103104000	9103103924	9103103940	9103103942	9103103951	9103103955	9103103968
ACCESSORY						
9103104000	9103103923	9103103933	9103103941	N/A	9103103954	N/A
9103104000	9103103924	9103103940	9103103942	9103103951	9103103955	9103103968
ACCESSORY						
9103104000	9103103923	9103103933	9103103941	N/A	9103103954	N/A
ACCESSORY						
9103104000	9103103923	9103103933	9103103941	N/A	9103103954	N/A
ACCESSORY						
9103104000	9103103927	9103103940	9103103944	9103103951	9103103957	9103103968

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)


[Cleaning Accessories](#)



Awning adapters in alphabetical order

VEHICLE MODEL	ADAPTER NO.	VEHICLE MODEL	ADAPTER NO.	VEHICLE MODEL	ADAPTER NO.
ADRIA CORAL	3	FIAT DUCATO H2 FOLDABLE ROOF	36	LMC LIBERTY < 2014	23
ADRIA CORAL (S690 SP)	7	FIAT DUCATO H2 ROOFRAIL	14	MAN TGE HIGH ROOF	34
ADRIA SHX	15	FIAT DUCATO H3	15	MC LOUIS GLAMYS	1
ARCA H SERIES	1	FIAT TALENTO	27	MC LOUIS LAGAN	3
ARCA M & P SERIES	10	FLORIUM WINCHESTER	10	MC LOUIS MC2 & MC4	1
AUTOSLEEPER VANS	15	FONT VENDOME H3	15	MC LOUIS NEVIS	1
BAILEY ROUND	30	FORD NUGGET HIGH ROOF	15	MC LOUIS STEEL	3
BAILEY SQUARE	5	FORD NUGGET WESTFALIA HIGH ROOF	15	MC LOUIS TANDY	1
BAVARIA BALTIC	7	FORD TRANSIT H3	15	MERCEDES SPRINTER	21
BAVARIA FJORD	7	FORD TRANSIT HIGH MODEL	15	MILLER MICHIGAN	7
BENIMAR TESSORO	16	FRANKIA COMFORT	1	MOBILVETTA	1
BÜRSTNER AVIANO	12	FRANKIA HOLIDAY	1	MOBILVETTA NAZCA	17
BÜRSTNER ELEGANCE	12	FRANKIA LUXURY	1	MOOVEO SERIES C	1
BÜRSTNER IXEO	3	FRANKIA PREMIUM	1	MOOVEO SERIES I	1
BÜRSTNER NEXXO	3	GIOTTILINE	23	MOOVEO SERIES P	1
BÜRSTNER ROUND	12	GIOTTILINE PANEL VAN	23	MORELLO	1
BÜRSTNER SOLANO	3	GIOTTILINE THERY	1	NIESMANN BISCHOF	16
BÜRSTNER SQUARE	7	GLOBECAR GLOBESTAR 600 L	18	NIESMANN BISCHOF MOTORHOME	16
CAMPÉRÈVE LINDBERGH	20	GLOBECAR CAMPSCOOUT	2	NISSAN INTERSTAR	22
CAMPÉRÈVE NEOVAN	1	GLOBECAR CAMPSCOOUT	18	NISSAN NV300 > 2016	27
CARADO T SERIES	9	GLOBECAR CAMPSCOOUT B	18	OPEL / VAUXHALL MOVANO > 2011	20
CARAVAN ADAPTER	20	GLOBECAR CAMPSCOOUT REVOLUTION	18	OPEL / VAUXHALL VIVARO B	27
CARTHAGO HIGH LINER	39	GLOBECAR GLOBESCOOUT LIMITED	18	OPEL MOVANO < 2011	22
CARTHAGO C	39	GLOBECAR GLOBESCOOUT PLUS	18	OPEL ZAFIRA > 2019	37
CARTHAGO CHIC	39	GLOBECAR GLOBESCOOUT R	18	PEUGEOT BOXER H2	18
CARTHAGO CHIC < 2018	17	GLOBECAR GLOBESTAR 600 L REVOLUTION	18	PEUGEOT BOXER H2 FOLDABLE ROOF	36
CARTHAGO CHIC > 2018	39	GLOBECAR GLOBESTAR 600 W	18	PEUGEOT BOXER H3	15
CHALLENGER EDEN	10	GLOBECAR GLOBESTAR 640 DK	18	PEUGEOT EXPERT > 2016	37
CHALLENGER GENESIS	3	GLOBECAR ROADSCOUT	18	PILOTE EXPLORATEUR	7
CHALLENGER PRIUM	1	GLOBECAR ROADSCOUT R	18	POSSL ROADCAMP WITH ROOF RAIL	14
CHALLENGER SIRIUS	1	GLOBECAR ROADSCOUT WITH ROOF RAIL	14	RAPIDO 10	3
CHAUSSON ALLEGRO	10	GLOBECAR SUMMIT 600	18	RAPIDO 7, 8 and 9 models	6
CHAUSSON EXALTIS	1	GLOBECAR SUMMIT 600 PLUS	18	RAPIDO DISTINCTION	28
CHAUSSON FLASH	1	GLOBECAR SUMMIT 640	18	RENAULT MASTER < 2011	22
CHAUSSON WELCOME	1	HOBBY	7	RENAULT MASTER > 2011	20
CI ELLIOT	1	HOBBY CARAVAN > 2014	33	RENAULT TRAFFIC > 2014	27
CI MIZAR	1	HOBBY MOTORHOME	7	RIMOR	1
CI RIVIERA	1	HOBBY VAN	3	ROLLER TEAM GRANDUC	1
CI SINFONIA	1	HYMER B2	4	ROLLER TEAM MAGNIFIC	1
CI X-TIL	1	HYMER CAMP	3	ROLLER TEAM PO	1
CITROEN CAMPSTER	37	HYMER EXSIS < 2007	3	ROLLER TEAM T-LINE	1
CITROEN JUMPER	18	HYMER EXSIS > 2007	4	SUNLIGHT	1
CITROEN JUMPER H2	18	HYMER S	16	TEC CARAVAN < 2014	23
CITROEN JUMPER H2 FOLDABLE ROOF	36	HYMER STARLINE	3	TOYOTA PROACE	37
CITROEN JUMPER H2 FOLDABLE ROOF	36	HYMER SX	16	VW CRAFTER < 2017	21
CITROEN JUMPER H3	15	HYMER T CLASS	4	VW CRAFTER > 2017	34
CITROEN JUMPY > 2016	37	HYMER T654 CL 2X2	3	VW CRAFTER H3 > 2017	34
CONCORDE	1	HYMER TRAMP	3	VW T5 / T6 CALIFORNIA	25
DETHLEFFS ADVANTAGE	1	HYMER VAN	4	VW T5 / T6 MULTIVAN	29
DETHLEFFS ESPRIT	1	HYMERMOBIL B CLASS	3		
DETHLEFFS GLOBE 4 & 5	9	HYMERMOBIL S CLASS	3		
DETHLEFFS GLOBETROTTER	1	ITINEO	1		
DETHLEFFS GLOBUS	9	IVECO DAILY < 2011	22		
DETHLEFFS MAGIC EDITION	1	KARMANN	10		
DUCCATO H2	18	KENTUCKY	1		
ELNAGH KING	1	KNAUS	1		
ELNAGH MAGNUM	1	LAIKA ECOVIP 1	5		
ERIBA TOURING 2011	4	LAIKA ECOVIP 7	11		
ERIBA TOURING ROOF TOP	16	LAIKA KREOS 5	17		
EURA MOBIL	2	LAIKA KREOS 9	11		
EURA MOBIL INTEGRA 670	10	LAIKA REXOSLINE	11		
EURA MOBIL INTEGRA STYLE	16	LE VOYAGEUR	15		
FENDT	23	LE VOYAGEUR PLATINUM	7		
FIAT DUCATO H2	18	LE VOYAGEUR PLATINUM	7		

ADAPTERS FOR WALL AWNINGS PW 1100, PW 1500

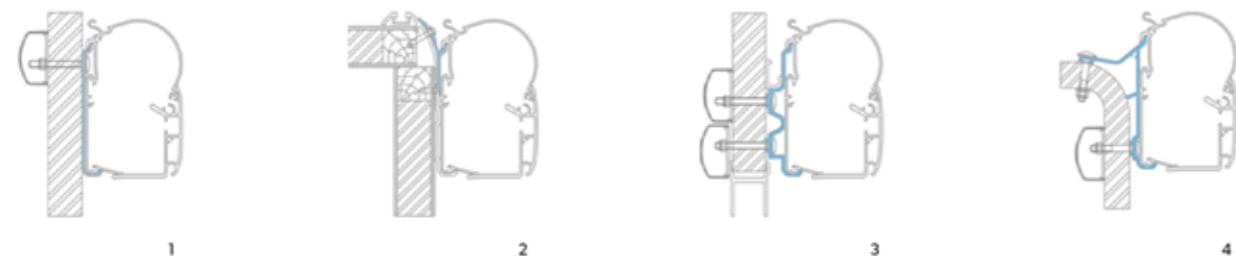


STANDARD FLAT		EURA MOBIL		HYMER CAMP		HYMER VAN B2	
AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.
3 m	9103103804	3 m	9103103813	3 m	9103103819	3 m	9103103826
3.5 m	9103103805	3.5 m	9103103814	3.5 m	9103103820	3.5 m	9103103827
4 m	9103103806	4 m	9103103815	4 m	9103103821	4 m	9103103828
4.5 m	9103103807	4.5 m	9103103816	4.5 m	9103103822	4.5 m	9103103829
5 m	9103103808	5 m	9103103817	5 m	9103103823	5 m	9103103830
5.5 m	9103103809	5.5 m	9103103818	5.5 m	9103103824	5.5 m	9103103831
6 m	9103103810						
5 x 0.4 m	9103103811			4 pcs	9103103825		
5 x 0.75m	9103103812						
CAMPÉRÈVE NEOVAN CHALLENGER PRIUM CHALLENGER SIRIUS CHAUSSON EXALTIS CHAUSSON FLASH CHAUSSON WELCOME CI ELLIOT CI MIZAR CI RIVIERA CI SINFONIA CI X-TIL CONCORDE DETHLEFFS ADVANTAGE DETHLEFFS ESPRIT DETHLEFFS GLOBETROTTER DETHLEFFS MAGIC EDITION ELNAGH KING ELNAGH MAGNUM FRANKIA COMFORT FRANKIA HOLIDAY FRANKIA LUXURY FRANKIA PREMIUM GIOTILINE THERRY ITINEO KENTUCKY KNAUS MC LOUIS GLAMYS MC LOUIS MC2 & MC4 MC LOUIS NEVIS MC LOUIS TANDY MOBILVETTA MOOVEO SERIES C MOOVEO SERIES I MOOVEO SERIES P MORELLO RIMOR ROLLER TEAM GRANDUC ROLLER TEAM MAGNIFIC ROLLER TEAM PO ROLLER TEAM T-LINE SUNLIGHT		EURA MOBIL GLOBECAR CAMPSCOOUT GLOBECAR FAMILYSCOUT GLOBECAR GLOBESCOOUT PÖSSL 2 WIN STYLE PÖSSL FOR 6		ADRIA CORAL BÜRSTNER IXEO BÜRSTNER NEXO BÜRSTNER SOLANO CHALLENGER GENESIS HOBBY VAN HYMER CAMP HYMER EXSIS < 2007 HYMER STARLINE HYMER T65-4 CL 2X2 HYMER TRAMP HYMERMOBIL B CLASS HYMERMOBIL S CLASS MC LOUIS LAGAN MC LOUIS STEEL MC LOUIS TANDY RAPIDO 10		ERIBA TOURING 2011 HYMER B2 HYMER EXSIS > 2007 HYMER T CLASS HYMER VAN	

ADAPTERS FOR WALL AWNINGS PW 1100, PW 1500




LAIKA ECOVIP 1		RAPIDO 7+8+9		BÜRSTNER + HOBBY SQUARE		DETHLEFFS GLOBEBUS	
AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.
4 m	9103103832	3 m	9103103834	3 m	9103103839	3 m	9103103846
4.5 m	9103103833	3.5 m	9103103835	3.5 m	9103103840	3.5 m	9103103847
		4 m	9103103836	4 m	9103103841	4 m	9103103848
		3 pcs	9103103837	4.5 m	9103103842	4.5 m	9103103849
		4 pcs	9103103838	4 pcs	9103103843	5 m	9103103850
						5.5 m	9103103851
BAILEY ECOVIP 1 LAIKA ECOVIP 1		RAPIDO 7, 8 and 9 models		ADRIA S690 SP BAVARIA BALTIC BAVARIA FJORD BÜRSTNER SQUARE HOBBY MOTORHOME LE VOYAGEUR PLATINUM MILLER MICHIGAN PILOTE EXPLORATEUR		CARADO T SERIES DETHLEFFS GLOBE 4 & 5 DETHLEFFS GLOBUS	

ADAPTERS FOR WALL AWNINGS PW 1100, PW 1500

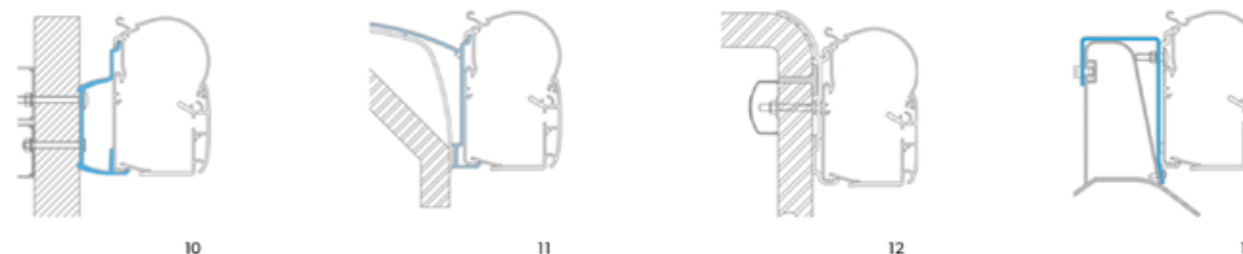

CHAUSSON ARCA		LAIKA REXOSLINE		BÜRSTNER RND		DUCATO H2 ROOFRAIL	
AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.
3 m	9103103852	4 m	9103103855	3 m	9103103859	3 pcs	9103103868
3.5 m	9103103853	4.5 m	9103103856	3.5 m	9103103860		
4 m	9103103854	5 m	9103103857	4 m	9103103861		
		3 pcs	9103103858	4.5 m	9103103862		
				5 m	9103103863		
				5.5 m	9103103864		
				6 m	9103103865		
				4 pcs	9103103866		
ARCA M SERIES CHALLENGER EDEN CHAUSSON ALLEGRO EURA MOBIL INTEGRA 670 FLORIUM MAYFLOWER FLORIUM WINCHESTER KARMANN		LAIKA ECOVIP 7 LAIKA KREOS 9 LAIKA REXOSLINE		BÜRSTNER AVIANO BÜRSTNER ELEGANCE BÜRSTNER ROUND		FIAT DUCATO H2 ROOFRAIL GLOBECAR CAMPSCOOUT GLOBECAR FAMILYSCOUT GLOBECAR GLOBESCOOUT PÖSSL 2 WIN STYLE PÖSSL FOR 6	

ADAPTERS FOR WALL AWNINGS PW 1100, PW 1500

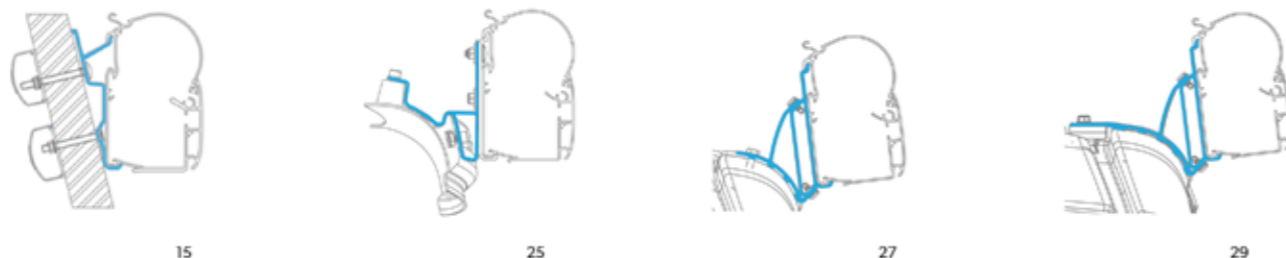


DUCATO H3 + LE VOYAGEUR		VW CALIFORNIA		VIVARO+TRAFIC+TALENTO+NV300		VW T5/T6 MULTIVAN	
AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.
3 m	9103103869	2 pcs	9103104020	2 pcs	9103104103	2 pcs	9103104118
3.5 m	9103103870						
4 m	9103103871						
4.5 m	9103103872						
5 m	9103103873						
5.5 m	9103103874						
4 pcs	9103103875						
ADRIA SHX AUTOSLEEPER VANS FIAT DUCATO H3 FONT VENDOME H3 FORD NUGGET HIGH ROOF FORD TRANSIT HIGH MODEL LE VOYAGEUR		VW T5 - T6 CALIFORNIA		FIAT TALENTO NISSAN NV300 OPEL / VAUXHALL VIVARO < 2018 OPEL MOVANO > 2012 RENAULT TRAFFIC > 2017		VW T5 / T6 MULTIVAN	

ADAPTERS FOR ROOF AWNINGS PR 2000, PR 2500




HYMER SX		LAIKA KREOS 05		DUCATO+JUMPER+BOXER 1P	
AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.
4 m	9103103876	4 m	9103103881	3.25 m	9103103887
4.5 m	9103103877	4.5 m	9103103882	3.75 m	9103103888
5 m	9103103878	5 m	9103103883	4 m	9103103889
5.5 m	9103103879	5.5 m	9103103884	3 pcs	9103103890
6 m	9103103880	6 m	9103103885		
		3 pcs	9103103886		
BENIMAR TESSORO ERIBA TOURING ROOF TOP EURA MOBIL INTEGRA STYLE HYMER S HYMER SX NIESMANN BISCHOF MOTORHOME		CARTHAGO CHIC <2018 LAIKA KREOS 5 MOBILVETTA NAZCA		CITROËN JUMPER 1 PİECE FIAT DUCATO H2 PEUGEOT BOXER H2 1 PİECE	

ADAPTERS FOR WALL AWNINGS PW 1100, PW 1500

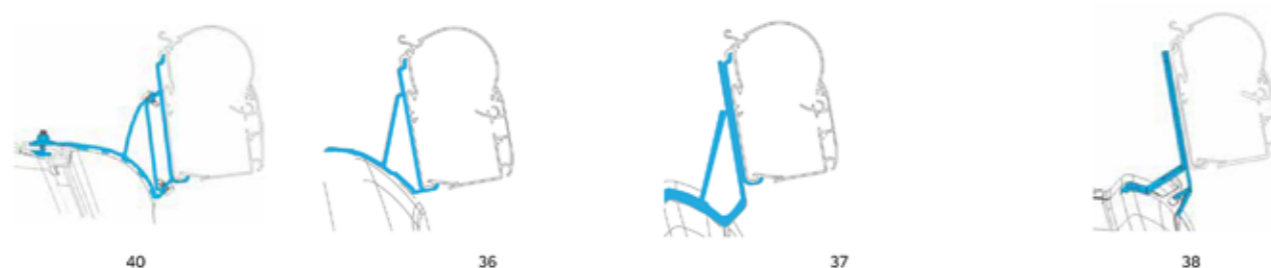

ADAPTER VW T5/T6 MULTIVAN C-RAIL		DUCATO H2 FOLDABLE ROOF		JUMPY EXPERT PROACE		ADAPTER PW CAMPSTER WITH SUTTER "C" RAIL	
AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.
2 pcs	9103104356	3.5 m	9103104262	2 pcs LHT	9103104011	2 pcs	9103104385
		2 pcs	9103104263	2 pcs RHT	9103104012		
ADAPTER VW T5/T6 MULTIVAN C-RAIL		DUCATO FOLDABLE ROOF		CITROËN JUMPER FOLDABLE ROOF PEUGEOT EXPERT >2016 TOYOTA PROACE		ADAPTER PW CAMPSTER WITH SUTTER „C“ RAIL	

ADAPTERS FOR ROOF AWNINGS PR 2000, PR 2500

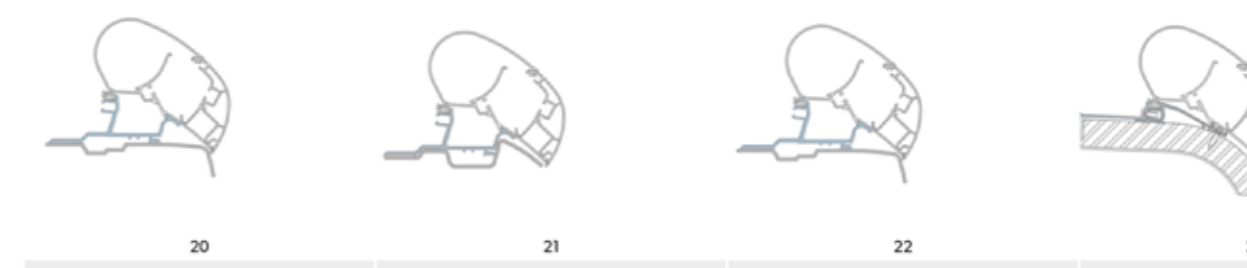

CARAV+MASTER >11		SPRINTER + CRAFTER PRE 2017		MASTER + MOVANO <2011		LMC +TEC	
AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.
3 m	9103103893	2.65 m	9103103902	3 m	9103103909	3 m	9103103914
3.25 m	9103104010	3 m	9103103903	3.5 m	9103103910	3.5 m	9103103915
3.5 m	9103103894	3.5 m	9103103904	3.75 m	9103103911	3.75 m	9103103916
3.75 m	9103103895	3.75 m	9103103905	4 m	9103103912	4 m	9103103917
4 m	9103103896	4 m	9103103906	4.5 m	9103103913	4.5 m	9103103918
4.5 m	9103103897	4.5 m	9103103907	5 m	9103104173	5 m	9103103919
5 m	9103103898	3 pcs	9103103908			5.5 m	9103103920
5.5 m	9103103899					6 m	9103103921
6 m	9103103900					3 pcs	9103103922
3 pcs	9103103901						
CAMPÉRÈVE LINDBERGH CARAVAN ADAPTER		MERCEDES SPRINTER VW CRAFTER 2006 - 2017		IVECO DAILY < 2011 NISSAN INTERSTAR OPEL MOVANO < 2011 RENAULT MASTER < 2011		FENDT GIOTTILINE PANEL VAN TEC CARAVAN	

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY


[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

ADAPTERS FOR ROOF AWNINGS PR 2000, PR 2500

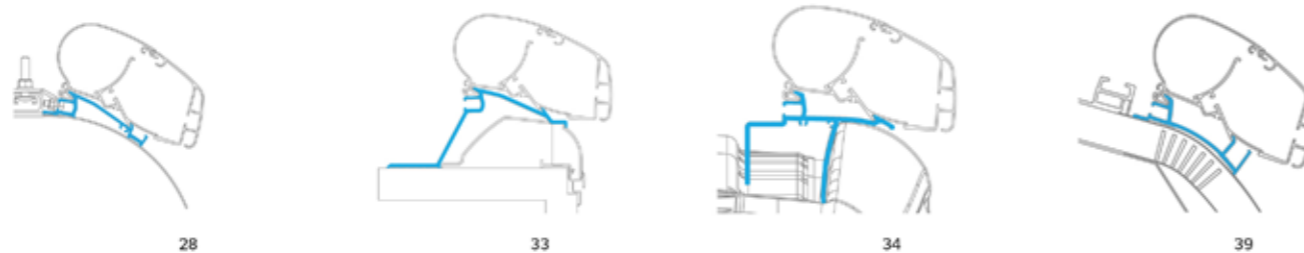

RAPIDO DISTINCTION		ADAPTER PR-HOBBY CARAVAN 2014		VOLKSWAGEN CRAFTER 2017		CARTHAGO CHIC	
AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.
5 m	9103104115	3 pcs	9103104203	2 pcs RHT	9103104206	4 m	9103104292
5.5 m	9103104116			2 pcs LHT	9103104250	4.5 m	9103104293
						5 m	9103104294
						5.5 m	9103104295
RAPIDO DISTINCTION		HOBBY CARAVAN		VW CRAFTER >2017		CARTHAGO C CARTHAGO CHIC CARTHAGO HIGH LINER	

ADAPTERS FOR ROOF AWNINGS PR 2000, PR 2500



DETHLEFFS CARAVAN		FIAT DUCATO H3		FIAT DUCATO H2 WITH DOMETIC SKYROOF		FIAT DUCATO H2 ROOFRAK	
AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.	AWNING LENGTH	REF. NO.
3.0 m	9103104359	3pcs	9103104205	3pcs	9103104378	3pcs	9103104379
3.25 m	9103104360						
3.5 m	9103104361						
3.75 m	9103104362						
4 m	9103104363						
4.5 m	9103104364						
5.0 m	9103104365						
5.5 m	9103104366						
6.0 m	9103104367						
3pcs	9103104368						
DETHLEFFS CARAVAN		FIAT DUCATO H3		FIAT DUCATO H2 WITH DOMETIC SKYROOF		FIAT DUCATO H2 ROOFRAK	

Dometic LED profile

LED strip with modular aluminum profile, white or anodised

Product Length (m)	Quality features		
	Led profile fragmented, white, 1 x	Led rail full length, white, 5 x	Led rail full length, anodised, 5 x
2.6	9103104264	9103104272	9103104283
3.0	9103104265	9103104273	9103104284
3.5	9103104266	9103104274	9103104285
4.0	9103104267	9103104275	9103104286
4.5	9103104268	9103104276	9103104287
5.0	9103104269	9103104277	9103104288
5.5	9103104270	9103104278	9103104289
6.0	9103104271	9103104279	9103104290

Dometic PW-SJ

Sealing joint for the Dometic PerfectWall PW 1500 / PW 1100

	3.00 m	3.50 m	4.00 m	6.00 m	30.00 m
PW 1500 sealing joints Small, width 50 mm	9103103979	9103103980	9103103981	-	9103103982
PW 1500 sealing joints Large, width 75 mm	9103103983	9103103984	9103103985	-	9103103986
PW 1100 sealing joints	-	-	9103104323	9103104324	9103104325
Description	Sealing joint for the Dometic PerfectWall awnings. Available in a variety of lengths and widths, this rubber sealing ensures the water-tight attachment of your awning to your RV.				

Dometic PR-FS

Awning foam strip kit for PR 2000 and PR 2500

Description	The Dometic PR-FS foam strip prevents leakage by closing the space between the vehicle and the roof awning. It is designed for the Dometic PerfectRoof PR 2000 or PR 2500.
Product	Ref. No.
Dometic PR Foam Tape, 2 x 1.5M, height 10 mm	9103104391
Dometic PR Foam Tape, 2 x 1.5M, height 20 mm	9103104207
Dometic PR Foam Tape, 2 x 1.5M, height 40 mm	9600049440

Dometic AW-TDKIT

Awning tie down kit

Description	This tie down kit enables you to firmly anchor PerfectWall and PerfectRoof awnings with support legs into the ground.
Quality features	<ul style="list-style-type: none"> Adjustable straps and robust clasps, just right for windy days Easy to use, guarantees firm hold Coil springs relieve strain in wind
Product	Ref. No.
Dometic AW-TDKIT	9103104000

DOMETIC

CLIMATE

Air Condition

Awning

Window

FOOD & BEVERAGE

Coolers

Refrigeration

Cooking

POWER & CONTROL

Energy

Lighting

SAFETY & SECURITY

Driver Support

HYGIENE & SANITATION

Sanitation

Cleaning Accessories

AN EXTRA ROOM IN FRONT OF THE VEHICLE

How you create additional "living space"

Dometic Camp Room

Awning tent



Quality features

- Water- and windproof for optimal protection in all weathers
- Quick and easy: can be set up by one person in under 20 minutes
- Zip-up closures transform the awning into a tent
- Scratch-proof seal to keep the rain out
- Attaching the standard supplied skirts creates an additional sleeping space
- All windows come with mosquito screens, roll-up PVC windows and curtains

Product	Ref. No.	Product	Ref. No.
CampRoom sides PW – Small – Ex 2.5 m	9103103934	CampRoom front – 2.6 m	9103103923
CampRoom sides PW – Small – Ex 2 m	9103103933	CampRoom front – 3 m	9103103924
CampRoom sides PW – Medium – Ex 2.5 m	9103103935	CampRoom front – 3.25 m	9103103925
CampRoom sides PW – Medium – Ex 2.75 m	9103104181	CampRoom front – 3.5 m	9103103926
CampRoom sides PW – Large – Ex 2.5 m	9103103936	CampRoom front – 3.75 m	9103103927
CampRoom sides PW – X-Large – Ex 2.5 m	9103103937	CampRoom front – 4 m	9103103928
		CampRoom front – 4.5 m	9103103929
CampRoom sides PR – Medium – Ex 2.5 m	9103103938	CampRoom front – 5 m	9103103930
CampRoom sides PR – Large – Ex 2.5 m	9103103939	CampRoom front – 5.5 m	9103103931
CampRoom sides PR – Ducato – Ex 2.5 m	9103103940	CampRoom front – 6 m	9103103932



All windows come standard with mosquito screens, roll-up PVC windows (outside) and curtains (inside).



The roll-up door is always fitted on the right hand side. Two doors (left and right) are standard for lengths > 4.50 m.



An additional triangle is included with the Ducato version for even better protection.



You can cover the lower side of the vehicle with a standard supplied skirt (keder rail is not included in the set).



The lock of the damping profile must be turned only a quarter of a turn.



The mast profiles are fitted with rubber seals to prevent scratching and to make the area entirely waterproof. The height can easily be adjusted.



The side panel is secured to the support legs with Velcro straps and then connected with the front panel.



The cross brace adds stability to the tent.

DOMETIC REVO ZIP PRIVACY ROOM

More than just shade

Dometic Revo Zip awnings can be fitted with a privacy room in a matter of minutes to provide comfortable accommodation away from the elements. The side walls simply zip to the awning roof and can be attached to the vehicle by using the Limpet™ Fix System or upright poles. The front wall slides into the prepared channel on

the awning's front rail and zips to the side walls. The Dometic Revo Zip Privacy Room comes complete with curtains and side doors with mesh panels behind. Suitable for vehicles with a rail height of between 240 and 270 cm.

- Side walls simply zip to the Revo roof
- Front wall slides into channel on the Revo front rail and zips to the side walls
- Side walls can be attached to the vehicle side using the Limpet™ Fix System or by using rear upright poles
- Height of side walls can be varied to suit different height vehicles with a rail height of between 240 -270 cm
- Complete with curtains on easy-slide track
- Zip-out side and front panels
- Side doors with mesh panels behind



MODEL	FITS AWNING MODEL	WEIGHT (KG)	REF. NO.
240 PRIVACY ROOM	REVO ZIP 240	9.1	9103104329
270 PRIVACY ROOM	REVO ZIP 270	9.8	9103104330
310 PRIVACY ROOM	REVO ZIP 310	10.7	9103104331
350 PRIVACY ROOM	REVO ZIP 350	11.1	9103104332
400 PRIVACY ROOM	REVO ZIP 400	11.5	9103104333
450 PRIVACY ROOM	REVO ZIP 450	11.9	9103104334
DOMETIC REVO SUPPORT RAFTER	350 – 450	0.5	9103104335



DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

ADDITIONAL PRIVACY AND WEATHER PROTECTION

RAINPROTECT

RainProtect is made from a grey, water- and windproof PVC material. The front and the side panels are available in different sizes. The front panel is non-transparent, the side panels (suitable for use left or right) have a panoramic window. They extend down to the ground to provide optimal protection against moisture.



Dometic RainProtect Front

Made from long-lasting opaque fabric, this windproof and waterproof PVC panel provides extra protection against the elements.

For awning width (m)	Extension (m)	Ref. No.	Quality features
			<ul style="list-style-type: none"> Designed to fit all Dometic awnings with support legs Windproof and waterproof construction For awning extensions of 2.50 m with widths from 2.6 to 6.0 m
2.60	1.40	9103103954	
3.00	1.40	9103103955	
3.50	1.40	9103103956	
3.75	1.40	9103103957	
4.00	1.40	9103103958	
4.50	1.40	9103103959	
5.00	1.40	9103103960	
5.50	1.40	9103103961	
6.00	1.40	9103103962	

Dometic RainProtect deLuxe Side

Panoramic window protects against rain and wind down to the ground. Can be used left or right.

Size	For awning extension (m)	Height (m)	Ref. No.	Quality features
				<ul style="list-style-type: none"> Designed to fit all Dometic awnings with support legs Windproof and waterproof construction For awning extensions of 2.50 m and heights from 2.0 to 3.2 m
SMALL	2.50	2.00 – 2.29	9103103967	
MEDIUM	2.50	2.30 – 2.59	9103103968	
LARGE	2.50	2.60 – 2.89	9103103969	
X-LARGE	2.50	2.90 – 3.20	9103103970	

SUNPROTECT

SunProtect is a transparent screen fabric that lets the light through and keeps the heat out. It is available as a front panel or side panel. The front panel has an extension of 1.40 metres and can be supplied for various awning widths. The side panel can be fitted either to the right or left of the awning. There's a matching SunProtect for all Dometic awnings.



Dometic SunProtect Front

Let the light in but keep the heat out with this breathable and translucent awning attachment. Available in a variety of sizes.

For awning width (m)	Extension (m)	Ref. No.	Quality features
			<ul style="list-style-type: none"> A translucent sun screen to keep you cool and protect you from the sun Comes in a large range of widths, ranging from 2.60 m to 6 m, to suit most models Consists of a light-permeable screen fabric that admits light but blocks heat
2.60	1.40	9103103941	
3.00	1.40	9103103942	
3.50	1.40	9103103943	
3.75	1.40	9103103944	
4.00	1.40	9103103945	
4.50	1.40	9103103946	
5.00	1.40	9103103947	
5.50	1.40	9103103948	
6.00	1.40	9103103949	

Dometic SunProtect Side

Let the light in but keep the heat out with this breathable and translucent awning attachment. Available in a variety of sizes.

Size	For awning extension (m)	Height (m)	Ref. No.	Quality features
				<ul style="list-style-type: none"> A translucent sun screen to keep you cool and protect you from the sun For awning extensions of 2.50 m and heights from 2.0 to 3.2 m Consists of a light-permeable screen fabric that admits light but blocks heat
SMALL	2.50	2.00 – 2.29	9103103950	
MEDIUM	2.50	2.30 – 2.59	9103103951	
LARGE	2.50	2.60 – 2.89	9103103952	
X-LARGE	2.50	2.90 – 3.20	9103103953	

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



EXPERTS IN LIGHT AND AIR

Dometic windows, roof openings and roller blinds

When it comes to creating perfect ventilation and light conditions, Dometic brand name products are the obvious choice. 70% of all European recreational vehicles use window systems which are made at the Krautheim factory in Southern Germany. The continuous feedback from OEMs, vehicle designers and motorhome enthusiasts results in innovative solutions that set industry standards on an international scale.

Dometic provides a huge choice of hinged and sliding windows – complemented by perfectly matching fly screens and roller blind systems. Intelligent design, high-grade materials and solid workmanship guarantee maximum functionality, convenient handling and a long service life.



WINDOWS & ROOF LIGHTS

Quality from the market leader: perfect workmanship, easy handling. Insulation according to home construction standards.

page 44 – 55



BLIND SYSTEMS AND FLY SCREENS

Effective protection, easy handling. Tailor-made solutions for windows and rooflights in all standard sizes.

page 56 – 59



ACCESSORIES

Rainwater drainage with integrated LED strip light for Fiat Ducato sliding doors. Safety net for protecting children on board.

page 60



SERVICE HATCHES

Beautiful design from weatherproof plastic material. Easy to fit without screws, horizontal or vertical installation.

page 61

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



Dometic FanTastic Vent 2250

Roof vent with white dome, 400 x 400 mm

3.42

	Quality Features <ul style="list-style-type: none"> 3-speed fan (low, medium, high) Fits standard sizes Built-in thermostat 				
	Dimensions (W x H x D) 400 x 190 x 400 mm Color type White				
<table border="1"> <thead> <tr> <th>Product</th> <th>Ref. No.</th> </tr> </thead> <tbody> <tr> <td>Dometic FanTastic Vent 2250</td> <td>9108879484</td> </tr> </tbody> </table>		Product	Ref. No.	Dometic FanTastic Vent 2250	9108879484
Product	Ref. No.				
Dometic FanTastic Vent 2250	9108879484				

Dometic FanTastic Vent 7350

Roof vent with white dome incl. remote control, 471 x 471 mm

3.42

	Quality Features <ul style="list-style-type: none"> Manual speed fan with 14 settings Automatic variable speed controlled by built-in thermostat Fits standard 471 x 471 mm Rain sensor automatically closes dome when wet Incl. remote control 				
	Dimensions (W x H x D) 471 x 190 x 471 mm Color type White				
<table border="1"> <thead> <tr> <th>Product</th> <th>Ref. No.</th> </tr> </thead> <tbody> <tr> <td>Dometic FanTastic Vent 7350</td> <td>9600005804</td> </tr> </tbody> </table>		Product	Ref. No.	Dometic FanTastic Vent 7350	9600005804
Product	Ref. No.				
Dometic FanTastic Vent 7350	9600005804				

Dometic FanTastic Vent 3350

Roof vent with white dome, 400 x 400 mm

3.42

	Quality Features <ul style="list-style-type: none"> Three fan blade speeds Built-in thermostat Quiet operation 				
	Dimensions (W x H x D) 400 x 190 x 400 mm Color type White				
<table border="1"> <thead> <tr> <th>Product</th> <th>Ref. No.</th> </tr> </thead> <tbody> <tr> <td>Dometic FanTastic Vent 3350</td> <td>9108879488</td> </tr> </tbody> </table>		Product	Ref. No.	Dometic FanTastic Vent 3350	9108879488
Product	Ref. No.				
Dometic FanTastic Vent 3350	9108879488				

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)




There are many different ways to let fresh air and natural light into the vehicle. You can use one of our popular lift-and-tilt roof lights (Hekis), or opt for a top-hung or sliding window.

Dometic Micro Heki 280 x 280

Roof window

3.42

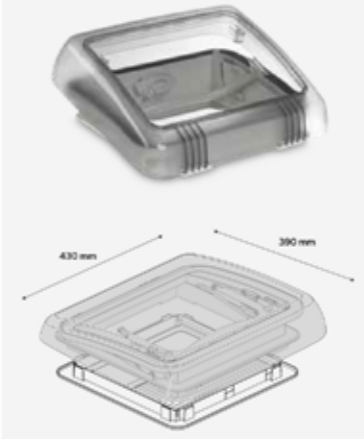	WITH FORCED VENTILATION	WITHOUT FORCED VENTILATION
		
Operating	Lever	Lever
Positions	2	2
Max. opening angle	50°	50°
PMMA glazing	Double	Double
Darkening	Single-pleated optional	Single-pleated
Fly screen	Single-pleated	Single-pleated
Frame material	ASA	ASA
Frame colour	RAL 9001	RAL 9001
Possible roof thickness	23 – 42* mm	23 – 42* mm
Installation dimensions = External space requirement	430 x 390 mm	430 x 390 mm
Aperture size	280 x 280 mm	280 x 280 mm
Weight	1.7 kg	1.7 kg
Quality Features	<ul style="list-style-type: none"> • Model available with inner fly screen (can be adjusted separately) and optional darkening • Model available with or without forced ventilation • Maximum opening angle: 50° • Double acrylic glazing, tinted on the outside • Lockable vent position • For roof thickness of 23–42 mm 	
Product	Ref. No.	
Roof window with flyscreen, forced ventilation	9104117434	
Roof window with flyscreen	9104117435	
Roof window with blinds and flyscreen, forced ventilation	9104117679	
Roof window with blinds and flyscreen	9104117680	
/ Optional extras		
Adapter frame for roof thicknesses of 43–60 mm	9104118059	
Adapter frame for for balancing the ledges on Fiat Ducato	9104116108	
Assembly kit 23–25 mm	9104118048	
Assembly kit 26–27 mm	9104118049	
Assembly kit 28–29 mm	9104118050	
Assembly kit 30–31 mm	9104118051	
Assembly kit 32–33 mm	9104118052	



* Requires additional assembly kit



Dometic Mini Heki Style 400 x 400

3.42

Roof window

	WITH FORCED VENTILATION	WITHOUT FORCED VENTILATION
		
		
* Requires shortening of the screw bosses		
Operating	Lever	Lever
Positions	3	3
Max. opening angle	50°	50°
PMMA glazing	Double	Double
Darkening	Single-pleated	Single-pleated
Fly screen	Single-pleated	Single-pleated
Frame material	ASA	ASA
Frame colour	RAL 9001	RAL 9001
Standard roof thickness	42 mm / 60 mm	42 mm / 60 mm
Possible roof thickness	25-41* mm / 43-59* mm	25-41* mm / 43-59* mm
Installation dimensions = External space requirement	550 x 510 mm	550 x 510 mm
Aperture size	400 x 400 mm	400 x 400 mm
Weight	3.3 kg	3.3 kg
Quality Features	<ul style="list-style-type: none"> • Opens to three positions: fully open, half-open, and bad-weather position • Dome with double acrylic glazing • Special shaped glass dome is aerodynamic • Handle-operated • Without or without forced ventilation • 400 x 400 mm 	
Product	Ref. No.	
Roof window with forced ventilation, roof thickness 25-42 mm	9104116244	
Roof window with forced ventilation, roof thickness 43-60 mm	9104116245	
Roof window without forced ventilation, roof thickness 25-42 mm	9104116242	
Roof window without forced ventilation, roof thickness 43-60 mm	9104116243	
/ Optional extras		
Spoiler	9104100260	
Adapter frame for roof openings bigger than 400 x 400 mm	9103500476	
Adapter frame for Fiat Ducato 250, 400 x 400 mm	9104114007	

Dometic Mini Heki S 400 x 400

3.42



Roof window

	Operating	Handles	
* Requires shortening of the screw bosses	Positions	5	
	PMMA glazing	Single	
	Darkening	Single-pleated	
	Fly screen	Single-pleated	
	Frame material	ASA	
	Frame colour	RAL 9001	
	Standard roof thickness	42 mm / 60 mm	
	Possible roof thickness	23-41* mm or 43-59* mm	
	Installation dimensions = External space requirement	500 x 500 mm	
	Aperture size	400 x 400 mm	
	Weight	2.9 kg	
	Quality Features	<ul style="list-style-type: none"> • Using handles, it can be placed in five different positions • Separately adjustable darkening and fly screens keep light and insects out • Forced ventilation 	
	Product		Ref. No.
	Dometic Mini Heki S, Roof window for roof thickness 25-42 mm		9104100289
Dometic Mini Heki S, Roof window for roof thickness 43-60 mm		9104100290	
/ Optional extras			
Spoiler		9104100260	
Adapter frame for roof openings bigger than 400 x 400 mm		9103500476	
Adapter frame for Fiat Ducato 250, 400 x 400 mm		9104114007	

Dometic Midi Heki Style 700 x 500

3.42

Roof window


	MIDI HEKI (HANDLE)	MIDI HEKI (CRANK)
		
		
Operating	Lever	Crank
Positions	3	variable
Max. opening angle	45°	60°
PMMA glazing	Double	Double
Darkening	Single-pleated	Single-pleated
Fly screen	Single-pleated	Single-pleated
Frame material	ASA	ASA
Frame colour	RAL 9001	RAL 9001
Standard roof thickness	30 – 34 mm	30 – 34 mm
Possible roof thickness	25 – 29 / 35 – 60 *mm	25 – 29 / 35 – 60 *mm
Installation dimensions = External space requirement	880 x 650 mm	880 x 650 mm
Aperture size	700 x 500 mm	700 x 500 mm
Weight	8.0 kg	8.5 kg
Quality Features	<ul style="list-style-type: none"> • Separately adjustable darkening and fly screens • Well insulated dome with double acrylic glazing • Improved aerodynamics reduce by 20 % 	
Product	Ref. No.	
Dometic Midi Heki Style, Roof window with lever, with forced ventilation, white, 700 x 500 mm	9104120057	
Dometic Midi Heki Style, Roof window with crank, with forced ventilation, white, 700 x 500 mm	9104120059	
Dometic Midi Heki Style, Roof window with lever, without forced ventilation, white, 700 x 500 mm	9104120058	
Dometic Midi Heki Style, Roof window with crank, without forced ventilation, white, 700 x 500 mm	9104120060	
Dometic Midi Heki Style, Roof window with lever, with forced ventilation, grey, 700 x 500 mm	9104121199	
Dometic Midi Heki Style, Roof window with crank, with forced ventilation, grey, 700 x 500 mm	9104121201	
Dometic Midi Heki Style, Roof window with lever, without forced ventilation, grey, 700 x 500 mm	9104121200	
Dometic Midi Heki Style, Roof window with crank, without forced ventilation, grey, 700 x 500 mm	9104121202	
/ Optional extras		
Additional Fly screen	9103500237	
Adapter frame	9104116106 (front)	
Adapter frame	9104116107 (rear)	
Spoiler 800 mm	9104100236	
Assembly kit 25 – 29 mm	9104100261	
Assembly kit 35 – 42 mm	9104100263	
Assembly kit 43 – 52 mm	9104100264	
Assembly kit 53 – 60 mm	9104100265	

* Requires additional assembly kit

Dometic Heki 2 960 x 655

3.42

Roof window for caravans

	Operating	Lever
	Positions	3
	Max. opening angle	55°
	PMMA glazing	Double
	Darkening	Roller blind system
	Fly screen	Roller blind system
	Frame material	ASA
	Frame colour	RAL 9001
	Standard roof thickness	25 – 32 mm
	Possible roof thickness	33 – 60 *mm
	Installation dimensions = External space requirement	1080 x 790 mm
	Aperture size	960 x 655 mm
	Weight	11.0 kg
	Quality Features	<ul style="list-style-type: none"> • Pneumatic springs for easy opening • Separately adjustable darkening and fly screens • Forced ventilation • Double acrylic glazing
	Product	Ref. No.
	Dometic Heki 2	9104100235
	/ Optional extras	
	Inner frame with integrated lights and roller blind for the Heki 2 De Luxe roof light	9104100241
	Spoiler 800 mm	9104100236
	Assembly kit 32 – 39 mm	9104100245
	Assembly kit 39 – 46 mm	9104100246
	Assembly kit 46 – 53 mm	9104100247
	Assembly kit 53 – 60 mm	9104100248

* Requires additional assembly kit

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION


[Sanitation](#)

[Cleaning Accessories](#)

Dometic Heki 2 de Luxe 960 x 655

3.42

Roof window for caravans, with integrated lights and honeycomb blind

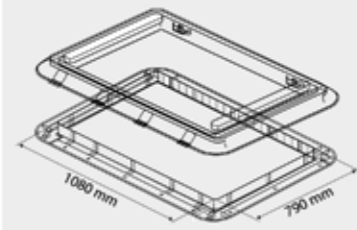

* Requires additional assembly kit


Operating	Lever
Positions	3
Max. opening angle	55°
12-volt lights	4 x 5 W
PMMA glazing	Double
Darkening	Duette
Fly screen	Roller blind system
Frame material	ASA
Frame colour	RAL 9001
Standard roof thickness	25–32 mm
Possible roof thickness	33–60 * mm
Installation dimensions = External space requirement	1080 x 790 mm
Aperture size	960 x 655 mm
Weight	11.0 kg
Quality Features	<ul style="list-style-type: none"> • Pneumatic springs • Double-pleated Duette honeycomb roller blind and fly screen • Forced ventilation • Double acrylic glazing • Integrated lighting

Product	Ref. No.
Dometic Heki 2 de Luxe	9104100240
/ Optional extras	
Spoiler 800 mm	9104100236
Spoiler 1,100 mm	9104100237
Assembly kit 32–39 mm	9104100245
Assembly kit 39–46 mm	9104100246
Assembly kit 46–53 mm	9104100247
Assembly kit 53–60 mm	9104100248

Dometic Heki 3plus 960 x 655

3.42

Roof window for caravans and motorhomes

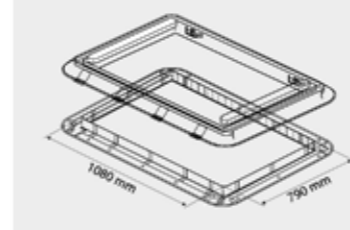

* Requires additional assembly kit


Operating	Crank
Positions	variable
Max. opening angle	70°
PMMA glazing	Double
Darkening	Duette
Fly screen	Single-pleated
Frame material	ASA
Frame colour	RAL 9001
Standard roof thickness	25–32 mm
Possible roof thickness	33–60* mm
Installation dimensions = External space requirement	1080 x 790 mm
Aperture size	960 x 655 mm
Weight	15 kg
Quality Features	<ul style="list-style-type: none"> • Double-pleated Duette honeycomb blind • Pleated, black gauze fly screen • Double acrylic glazing

Product	Ref. No.
Dometic Heki 3plus	9104115635
/ Optional extras	
Spoiler 800 mm	9104100236
Spoiler 1,100 mm	9104100237
Assembly kit 32–39 mm	9104100245
Assembly kit 39–46 mm	9104100246
Assembly kit 46–53 mm	9104100247
Assembly kit 53–60 mm	9104100248

Dometic S4 Windows

Top-hung and sliding windows

3.42

Sliding window	Hinged window	Quality Features
		<ul style="list-style-type: none"> • Double acrylic glazing and polyurethane frame for excellent insulation • Built-in aluminium-coated darkening blind • Practical fly screen keeps insects out • Quick and easy installation • Friction hinges allow opening to any position (top-hung version)

Size W x H (mm)	Overall size W x H (mm)	Space size W x H (mm)	Clearance dimension W x H (mm)	Weight (kg)	Ref. No. hinged window	Ref. No. sliding window
300 x 500	343 x 531	293 x 498	204 x 354	4.3	9104117016	-
350 x 500	393 x 531	343 x 498	254 x 354	4.7	9104115543	-
500 x 300	544 x 330	499 x 298	404 x 154	4.3	9104115544	-
500 x 350	544 x 380	500 x 348	404 x 204	4.7	9104115545	-
500 x 450	544 x 480	500 x 448	404 x 304	5.0	9104115546	9104100141
500 x 500	544 x 531	499 x 499	404 x 354	5.7	9104115547	-
550 x 550	594 x 581	549 x 549	454 x 404	5.7	9104115549	-
550 x 600	594 x 631	549 x 599	454 x 454	6.1	9104115551	-
600 x 500	644 x 531	599 x 498	504 x 354	6.1	9104115552	9104100147
600 x 600	644 x 631	599 x 599	504 x 454	7.0	9104115553	9104100149
700 x 300	745 x 330	700 x 298	604 x 154	5.3	9104115555	9104100151
700 x 400	745 x 430	702 x 398	604 x 254	6.1	9104115557	9104100153
700 x 450	745 x 481	702 x 448	604 x 304	6.5	9104115558	9104100155
700 x 500	745 x 531	700 x 498	604 x 354	7.0	9104115559	-
700 x 550	745 x 581	700 x 549	604 x 404	7.4	9104115560	9104100157
700 x 600	745 x 631	702 x 599	604 x 454	7.7	9104115561	9104100159
750 x 600	797 x 631	750 x 599	654 x 454	8.2	9104115564	9104100163
800 x 350	846 x 380	800 x 347	704 x 204	6.6	9104115565	9104100165
800 x 450	846 x 481	801 x 450	704 x 304	7.1	9104115566	9104100167
900 x 400	948 x 430	902 x 398	804 x 254	7.5	9104115568	9104100171
900 x 450	948 x 481	902 x 448	804 x 304	8.0	9104115569	9104100173
900 x 500	948 x 531	902 x 499	804 x 354	8.4	9104115570	9104100175
900 x 550	948 x 581	902 x 549	804 x 404	8.6	9104115571	9104100177
900 x 600	948 x 631	902 x 599	804 x 454	9.2	9104115572	9104100179
1000 x 450	1048 x 481	1002 x 448	904 x 304	8.6	9104115573	-
1000 x 500	1048 x 531	1002 x 499	904 x 354	9.3	9104115574	9104100181
1000 x 600	1048 x 631	1002 x 599	904 x 454	11.0	9104115576	9104100185
1000 x 800	1048 x 832	1002 x 800	904 x 654	12.0	9104115577	-
1100 x 450	1148 x 481	1103 x 448	1004 x 304	9.9	9104115578	9104100187
1100 x 550	1148 x 581	1102 x 549	1004 x 404	10.1	9104115579	-
1200 x 300	1248 x 330	1201 x 297	1104 x 154	8.2	9104115581	-
1200 x 500	1249 x 531	1203 x 500	1104 x 354	10.5	9104115583	-
1200 x 600	1249 x 631	1201 x 599	1104 x 454	12.5	9104115584	9104100189
1200 x 700	1249 x 733	1201 x 699	1104 x 554	13.1	9104115585	-
1300 x 600	1343 x 631	1297 x 599	1204 x 454	14.2	9104115588	9104100193
1450 x 550	1500 x 581	1453 x 549	1354 x 404	13.6	9104115589	-
1450 x 600	1500 x 631	1454 x 599	1354 x 454	14.9	9104115590	9104100195
1450 x 700	1500 x 733	1452 x 699	1354 x 554	15.7	9104115591	-
1600 x 600	1650 x 631	1602 x 599	1504 x 454	16.2	9104115593	-

Dometic S7P windows

A perfect match for panel vans with curved outlines: S7P windows look great with their slightly curved radius of 5000 mm, flush-fitting pane and dark-tinted double acrylic glazing. The lightweight, powder-coated aluminium frame ensures excellent insulation and a perfect finish.



Hinged window

Size W x H (mm)	Overall size W x H (mm)	Space size W x H (mm)	Clearance dimension W x H (mm)	Weight (kg)	Ref. No.
280 x 380	308 x 408	280 x 380	230 x 330	1.6	9104116042
490 x 500	518 x 528	490 x 500	440 x 450	3.0	9104116041
560 x 465	588 x 493	560 x 465	510 x 415	3.2	9104116040
700 x 510	728 x 538	700 x 510	650 x 460	4.1	9104116039
750 x 465	778 x 493	750 x 465	700 x 415	4.0	9104116038
818 x 315	843 x 343	818 x 315	768 x 265	3.2	9104116037
960 x 450	988 x 478	960 x 450	910 x 400	4.8	9104116036
985 x 465	1013 x 493	985 x 465	935 x 415	5.1	9104116035

Accessories – Pleated blinds for S7P window

The single pleated darkening screen and the fly screen can be clipped together and adjusted with one hand to any position. Curvature radius of 5000 mm. For wall thickness 26 – 27mm

Size W x H (mm)	Window size W x H (mm)	Colour	Ref. No.
233 x 352	280 x 380	creme	9104116029
443 x 472	490 x 500	creme	9104116030
513 x 437	560 x 465	creme	9104116018
653 x 482	700 x 510	creme	9104116019
703 x 437	750 x 465	creme	9104116020
771 x 287	818 x 315	creme	9104116021
913 x 422	960 x 450	creme	9104116022
938 x 437	985 x 465	creme	9104116044



Fly screen

Darkening

Accessories – Fixing kit for S7P window

The fixing kits matching the various window sizes are indispensable installation accessories for S7P aluminium windows; they make installation very easy. Mounting brackets and screws for the existing wall thickness are included.

Wall thickness (mm)	Ref. No.
22 – 23	9104116094
24 – 25	9104116095
26 – 27	9104116096
28 – 29	9104116097
30 – 31	9104116098
32 – 33	9104116099
34 – 35	9104116100
36 – 37	9104116101
38 – 39	9104116102
40 – 41	9104116103
42 – 43	9104116104



DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION


[Sanitation](#)

[Cleaning Accessories](#)



Dometic DB1R


Darkening roller blind with fly screen

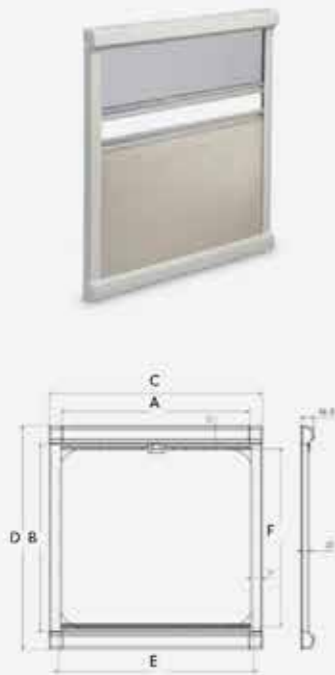

Quality features		<ul style="list-style-type: none"> • New design – blends in harmoniously with modern vehicle models • Preamsembled to fit RV windows • Black-out blind and fly screen can be adjusted separately • Fly screen can be fitted top or bottom • Maximum field of vision due to slim profiles • No visible screws • Tool-free tensioning of blind and fly screen 						
Order size		Total measurement		Window section		cream white		
Size A (mm)	Size B (mm)	Size C (mm)	Size D (mm)	Size E (mm)	Size F (mm)	Weight (kg)	Ref. No.	
480	330	554	436	500	300	1.25	9104121218	
480	530	554	636	500	500	1.3	9104121219	
580	530	654	636	600	500	1.35	9104121220	
580	630	654	736	600	600	1.39	9104121221	
680	430	754	536	700	400	1.41	9104121222	
680	530	754	636	700	500	1.45	9104121223	
680	630	754	736	700	600	1.49	9104121224	
780	530	854	636	800	500	1.54	9104121225	
780	630	854	736	800	600	1.59	9104121226	
880	330	954	436	900	300	1.64	9104121227	
880	530	954	636	900	500	1.7	9104121228	
880	630	954	736	900	600	1.74	9104121229	
980	530	1054	636	1000	500	1.81	9104121230	
980	630	1054	736	1000	600	1.85	9104121231	
1080	530	1154	636	1100	500	1.9	9104121232	
1080	630	1154	736	1100	600	1.94	9104121233	
1180	330	1254	436	1200	300	1.9	9104121234	
1180	530	1254	636	1200	500	1.94	9104121235	
1180	630	1254	736	1200	600	1.98	9104121236	
1280	530	1354	636	1300	500	2.04	9104121237	
1280	630	1354	736	1300	600	2.09	9104121238	
1580	630	1654	736	1600	600	2.21	9104121239	
Dometic DB1R – Roof hatch roller blind								
410	480	484	586	430	450	0.96	9104121240	
470	480	544	586	490	450	1.08	9104121241	
510	580	584	686	530	550	1.15	9104121242	

Dometic Rastrollo 3000

Roller blind

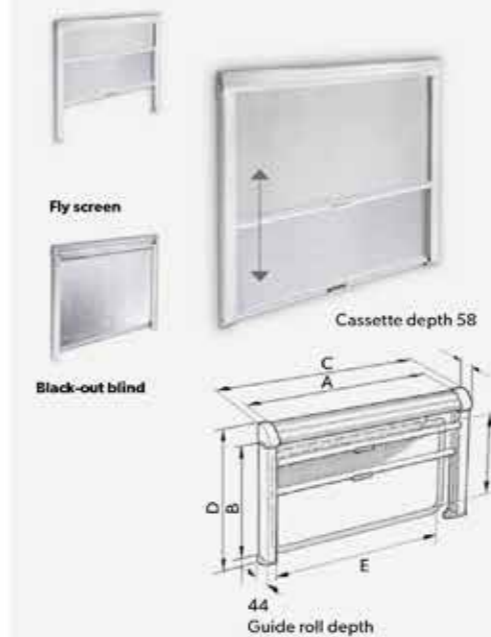

A = width ordered
B = height ordered
C = overall width
D = overall height
E = width of window opening
F = height of window opening

Quality features

- Spring loaded roller blind for smooth and even unwinding
- Black-out blind and fly screen which can be adjusted separately
- Designed to be fitted above the window, making it ideal for windows without frames


Standard size

Size A (mm)	Size B (mm)	Size C (mm)	Size D (mm)	Size E (mm)	Size F (mm)	Weight (kg)	Ref. No.	Ref. No.
335	345	354	439	275	285	1.0	-	9104109622
660	710	679	804	600	650	2.28	9104108376	9104108412
710	710	729	804	650	650	2.33	9104108377	9104108413
760	710	779	804	700	650	2.39	9104108378	9104108414
810	710	829	804	750	650	2.44	9104108379	9104108415
860	710	879	804	800	650	2.50	9104108380	9104108416
960	710	979	804	900	650	2.61	9104108381	9104108417
1060	710	1079	804	1000	650	2.71	9104108382	9104108418
1160	710	1179	804	1100	650	2.82	9104108383	9104108419
1260	710	1279	804	1200	650	2.93	9104108384	9104108420
1360	810	1379	904	1300	750	3.34	9104108385	9104108421
1460	810	1479	904	1400	750	3.45	9104108386	9104108422
1510	810	1529	904	1450	750	3.50	9104108387	9104108423
1560	810	1579	904	1500	750	3.56	9104108388	9104108424
1610	810	1629	904	1550	750	3.61	9104108389	9104108425
1660	810	1679	904	1600	750	3.67	9104108390	9104108426
1760	810	1779	904	1700	750	3.78	9104108391	9104108427

Dometic FP 210

4.70


Windscreen darkening blind for Fiat Ducato 250/290

	Operating	manual
	Positions	variable
	Frame material	PA6, Aluminium
	Frame colour	RAL7044, RAL9005
Quality Features	<ul style="list-style-type: none"> • Double-pleated honeycomb material for optimized insulation and maximum robustness • Simple, comfortable, stepless handling ensures privacy protection • Effective darkening thanks to 100 % light-tight material • Specially developed for vehicles with central rear mirror • Perfect finish – looks like an integrated solution • Not suitable for vehicles with folding beds, parcel shelves, head-up displays or optionally installed A-pillar airbags • Suitable for vehicles with rain or camera sensor boxes 	
Product		Ref. No.
Dometic FP 210		9104124796
Custom-fit for Peugeot Boxer, Citroën Jumper, new Opel Movano and Fiat Ducato (old and new) without rear-view mirror		

Dometic FP 300

4.70


Darkening system with windscreen blind for Fiat Ducato 250/290

	Operating	manual
	Positions	variable
	Frame material	PA6, Aluminium
	Frame colour	RAL7044, RAL9005
Quality Features	<ul style="list-style-type: none"> • Double-pleated honeycomb material for maximum insulation against heat and cold • Bottom-to-top operation – optimal privacy protection • Ultra-fast installation – no need to dismantle existing components! • Slim upper blind • Can be set to any position to let light into the vehicle or darken the cabin completely • Specially developed for vehicles without inside mirror and without side airbag • Also suitable for vehicles with a rain sensor box 	
Product		Ref. No.
Dometic FP 300 with front screen for Fiat Ducato 250/290		9104121168
Custom-fit for Fiat Ducato models X250 and X290 as well as the same design Peugeot Boxer and Citroën Jumper models. Not suitable for vehicles with rear-view mirror or side airbag.		

Dometic windscreen roller blinds

4.70


Windscreen roller blind for Fiat Ducato 250 / 233 / 244

	Operating	manual
	Positions	variable
	Cassete material	aluminium
	Frame colour	RAL 9005
Quality Features	<ul style="list-style-type: none"> • Screening and insulation due to an aluminium coating on the exterior • Powder-coated cassette with roller blind • Available for left and right-hand-drive models (type 250) 	
Product		Ref. No.
Windscreen roller blind, grey (left-hand-drive), for Fiat Ducato Type 250		9104100269
Windscreen roller blind, beige (left-hand-drive), for Fiat Ducato Type 230 and 244		9104100233
Windscreen roller blind, grey (left-hand-drive), for Fiat Ducato Type 230 and 244		9104100234

Dometic SP 310

4.70


Side darkening blinds for Fiat Ducato 290 Series 8 (from July 2021)

	Operating	manual
	Positions	variable
	Frame material	PA6
	Frame colour	RAL7044
Quality Features	<ul style="list-style-type: none"> • Double-pleated honeycomb material for optimized insulation and maximum robustness • Effective darkening thanks to 100 % light-tight material • Easy and comfortable handling with comfort close function • Hassle-free installation – no need to disassemble any door components • Extremely lightweight construction – about 1 kg less per side than with competitor products • Perfect finish – looks like an integrated solution • Optimized clearance for visibility of the little passenger mirror 	
Product		Ref. No.
Dometic SP 310		9104124770

Dometic SP 300

4.70

Darkening system with side screens for Fiat Ducato 250/290

	Operating	manual
	Positions	variable
	Frame material	PA6
	Frame colour	RAL7044
Quality Features	<ul style="list-style-type: none"> • Double-pleated honeycomb material for maximum insulation against heat and cold • Effective darkening thanks to 100% light-tight material • Custom-fit for Fiat Ducato models X250/ X290 and similar design Peugeot Boxer and Citroën Jumper models • Hassle-free installation – no need to disassemble any door components 	
Product		Ref. No.
Left	9104122292	
Right	9104122695	
Custom-fit for Fiat Ducato models X250 and X290 as well as the same design Peugeot Boxer and Citroën Jumper models.		

Dometic Flyscreen

4.70

Door fly screen

	Frame material	Aluminium
	Frame colour	RAL 9016
	Quality Features	<ul style="list-style-type: none"> • Aluminum frame is simply attached to the top half of the door, which can be opened separately • Sturdy, glass-fibre reinforced fly screen and durable, powder-coated aluminum frame • A perfect fit for standard size doors • Low space requirement – only 62 mm deep
	Product	
Door fly screen, 580 x 1100 mm		9104100238
Door fly screen, 615 x 1100 mm		9104100239

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

Dometic Flytec FT200

4.70

Door fly screen for Fiat Ducato 250/290



Operating	Manual
Frame material	Aluminium
Frame colour	RAL7044
Weight	5.5 kg
Quality Features	<ul style="list-style-type: none"> • Custom-fit for Fiat Ducato models X250 and X290 as well as the same design Peugeot Boxer and Citroën Jumper models. • Reliably keeps out all types of insects • Convenient on-hand operation • Quick to install
Product	Ref. No.
Dometic FlyTec FT200, for left hand drive vehicles	9104117297
Dometic FlyTec FT200, for right hand drive vehicles	9104117296

Dometic RainTec RT 100

4.70

Illuminated drainage



Material	Aluminium
Weight	480 g
Quality Features	<ul style="list-style-type: none"> • Rain gutter for Fiat Ducato sliding doors • Prevents rainwater getting in when the door is open • Also features an integrated LED light strip
Product	Ref. No.
Dometic RainTec RT 100, illuminated drainage, black version	9106505301
Dometic RainTec RT 100, illuminated rain gutter for Fiat Ducato sliding doors, white	9106505302
Optional accessory	
Remote control for LED lights and SMD flexi-strips	9106504080

Dometic Safety Net

4.70

Safety net



Scope of delivery	Safety net with manual in box
Description	This safety net stops children from falling out of bed and prevents injuries. It attaches to the slatted base with four screws while two straps connect to the ceiling. It can be conveniently dismantled in a matter of seconds.
Quality Features	<ul style="list-style-type: none"> • Easy to operate • Ensure there's no harm even if someone falls out of bed • Meets the standards of the automobile industry, for heights of up to 900 mm
Product	Ref. No.
Dometic Safety Net, 1800 x 580	9104100231
Dometic Safety Net, 1800 x 900	9104100232



Dometic SK 4

3.42

Service Hatch

	Quality Features	<ul style="list-style-type: none"> • Durable service hatch made from spray cast ASA • Quick and easy installation without the need for screws • Can be fitted vertically or horizontally 					
	Width (mm), hinge dimension				Height (mm)		
	375 x 305	375	335	409	305	265	338
	700 x 305	700	660	734	305	265	338
	700 x 405	700	660	734	405	365	438
	1000 x 305	1000	960	1034	305	265	338
1000 x 405	1000	960	1034	405	365	438	
Wall thickness (mm)	Weight (kg)*	Ref. No.					
23 - 32	0.99	9104100197					
23 - 32	1.45	9104100198					
23 - 42	1.56	9104100199					
23 - 42	2.00	9104100200					
23 - 42	2.20	9104100201					

Dometic SK 5

3.42

Service Hatch

	Quality Features	<ul style="list-style-type: none"> • Service hatch with integrated ventilation for the Dometic cassette toilet • Quick and easy installation without the need for screws • Designed to blend in with the exterior of vehicle 					
	Width (mm), hinge dimension				Height (mm)		
	Size (mm)	Size A	Size B	Size C	Size D	Size E	Size F
	360 x 310	360	337	385	310	288	335
	650 x 350	648	625	673	347	326	373
	Wall thickness (mm)	Weight (kg)*	Ref. No.				
23 - 36	0.90	9104100202					
23 - 36	1.30	9104100203					

* Weight without cover. All sizes in mm. Changes and errors reserved.
A = SPACE SIZE IN WIDTH B = CLEARANCE WIDTH C = OVERALL WIDTH D = SPACE SIZE IN HEIGHT E = CLEARANCE F = OVERALL HEIGHT

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



MOBILE REFRIGERATION BY DOMETIC

Expertise you can build on

Four decades of development work have given rise to a product range that brings out the best of all refrigeration technologies. Powerful compressor cooling, lightweight and low-cost thermoelectrics, noiseless absorption technology with three energy sources, or well insulated passive coolers that don't require an external energy supply – the Dometic range gives you a multitude of options.

So, whenever it comes to creating high-performance cooling solutions in confined spaces – build on the expertise of the market leader! Take your pick from a range that has convinced consumers, stockists, vehicle outfitters and automotive manufacturers worldwide.



COMPRESSOR COOLERS

Compressor coolers provide excellent cooling performance, even at extreme ambient temperatures and with minimal power consumption.

page 64 – 77



THERMOELECTRIC COOLERS

Thermoelectric coolers provide active cooling up to 27 °C below the ambient temperature (depending on the model). Lightweight and easy to transport, they can be used for refrigeration as well as for keeping food warm.

page 78 – 81



ABSORPTION COOLERS

Noiseless cooling with three energy sources for maximum flexibility and independence. Absorption coolers can be run on 12 volts, 230 volts, or gas when electricity is unavailable.

page 82 – 83



PASSIVE COOLERS

Well insulated and packed with ice cubes or ice packs, our passive coolers keep the contents fresh for up to several days in all weather conditions, and without requiring any external power supply.

page 84 – 87

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

DOMETIC CFX3 COMPRESSOR COOLERS

Power and efficiency

CFX3 coolers come with Dometic's market leading VMISO3 variable-speed compressor for excellent cooling performance and energy efficiency. Durable and lightweight fender frames protect the coolers, making them ideal for use in harsh outdoor environments. Strong, spring-loaded aluminium handles facilitate lifting and carrying. The


cooling temperature can be set on the TFT display screen of the box. Alternatively, the CFX3 app allows temperature control via Bluetooth or wireless network. It also provides performance history for convenient documentation.



Dometic CFX3 25

Mobile compressor cooler, 25 l



	Total Volume	25 l
	Provides space for	5 x 1.5 l bottles 40 x 0.33 l cans
	Connections	12 / 24 V DC, 100 - 240 V AC
	Temperature range	+20 °C to -22 °C
	Power Input	46 W
	Insulation	PU foam all around
	System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat
	Refrigerant	R134a: 32 g, CO ₂ equivalent: 0.046 t, Global warming potential (GWP): 1430
	Quality Features	<ul style="list-style-type: none"> CFX3 app allows temperature control via Bluetooth or wireless network and provides performance history Powerful VMISO3 controlled compressor enables optimum power consumption Heavy-duty yet lightweight construction, fender frame protected edges and fully insulated lid with aluminium hinges Built-in TFT user interface displays operating status
	Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey	
Weight	12.7 kg	
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)	
Scope of delivery	1 cooler, 1 manual, 1 connection cable for 12/24 V connection, 1 connection cable for 100 - 240 V connection, removable wire baskets	
Product		Ref. No. Ref. No. UK
Dometic CFX3 25		9600028369 9600028463
/ Optional extras see p.69 - 71		




Dometic CFX3 35

Mobile compressor cooler, 36 l




	Total Volume	36 l
	Provides space for	6 x 1.5 l bottles 57 x 0.33 l cans
	Connections	12 / 24 V DC, 100 - 240 V AC
	Temperature range	+20 °C to -22 °C
	Power Input	50 W
	Insulation	PU foam all around
	System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat
	Refrigerant	R134a: 38 g, CO ₂ equivalent: 0.054 t, Global warming potential (GWP): 1430
	Quality Features	<ul style="list-style-type: none"> Heavy-duty yet lightweight ExoFrame construction with fender frame protected edges and aluminum alloy handles Powerful VMISO3 controlled compressor enables optimum power consumption Easy-to-read High-Resolution Color Display and soft touch buttons enabling seamless control and monitoring of cooler performance CFX3 App allows temperature control via wireless network or Bluetooth and provides performance history 3-stage dynamic battery protection system prevents dead car battery or allows deep draw on dual batteries Active Gasket Technology provides a superior seal to retain cool air and minimize power consumption
	Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey	
Weight	16.9 kg	
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)	
Scope of delivery	1 cooler, 1 manual, 1 connection cable for 12/24 V connection, 1 connection cable for 100 - 240 V connection, removable wire baskets	
Product		Ref. No. Ref. No. UK
Dometic CFX3 35		9600025324 9600025325
/ Optional extras see p.69 - 71		



Dometic CFX3 45

Mobile compressor cooler, 46 l

C A T G 4.30



Total Volume	46 l
Provides space for	10 x 1.5 l bottles 72 x 0.33 l cans
Connections	12 / 24 V DC, 100–240 V AC
Temperature range	+20 °C to –22 °C
Power input	52 W
Insulation	PU foam all around
System	• See CFX3 35, page 65
Refrigerant	R134a: 42 g, CO ₂ equivalent: 0.060 t, Global warming potential (GWP): 1430
Quality Features	• See CFX3 35, page 65
Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey
Weight	18.7 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
Scope of delivery	1 cooler, 1 manual, 1 connection cable for 12/24 V connection, 1 connection cable for 100 - 240 V connection, removable wire baskets



Product	Ref. No.	Ref. No. UK
Dometic CFX3 45	9600025326	9600025327

/ Optional extras see p.69 – 71

Dometic CFX3 55IM

Mobile compressor cooler, 53 l

C A T G 4.30



Total Volume	53 l
Provides space for	13 x 1.5 l bottles 80 x 0.33 l cans
Connections	12 / 24 V DC, 100–240 V AC
Temperature range	+20 °C to –22 °C
Power input	52 W
Insulation	PU foam all around
System	• See CFX3 35, page 65
Refrigerant	R134a: 45 g, CO ₂ equivalent: 0.064 t, Global warming potential (GWP): 1430
Quality Features	• See CFX3 35, page 65 • Built-in ice maker produces ice in a matter of hours
Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey
Weight	21.3 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
Scope of delivery	1 cooler, 1 manual, 1 connection cable for 12/24 V connection, 1 connection cable for 100 - 240 V connection, removable wire baskets, 1 icemaker



Product	Ref. No.	Ref. No. UK
Dometic CFX3 55IM	9600025330	9600025331

/ Optional extras see p.69 – 71

Dometic CFX3 55

Mobile compressor cooler, 55 l

C A T G 4.30



Total Volume	55 l
Provides space for	13 x 1.5 l bottles 80 x 0.33 l cans
Connections	12 / 24 V DC, 100–240 V AC
Temperature range	+20 °C to –22 °C
Power input	50 W
Insulation	PU foam all around
System	• See CFX3 35, page 65
Refrigerant	R134a: 45 g, CO ₂ equivalent: 0.064 t, Global warming potential (GWP): 1430
Quality Features	• See CFX3 35, page 65
Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey
Weight	20.4 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
Scope of delivery	1 cooler, 1 manual, 1 connection cable for 12/24 V connection, 1 connection cable for 100 - 240 V connection, removable wire baskets



Product	Ref. No.	Ref. No. UK
Dometic CFX3 55	9600025328	9600025329

/ Optional extras see p.69 – 71

Dometic CFX3 100

Mobile compressor cooler, 99 l

D A T G 4.30



Total Volume	99 l
Provides space for	31 x 1.5 l bottles 177 x 0.33 l cans
Connections	12 / 24 V DC, 100–240 V AC
Temperature range	+20 °C to –22 °C
Power input	73 W
Insulation	PU foam all around
System	• See CFX3 35, page 65
Refrigerant	R134a: 60 g, CO ₂ equivalent: 0.086 t, Global warming potential (GWP): 1430
Quality Features	• See CFX3 35, page 65
Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey
Weight	29.6 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
Scope of delivery	1 cooler, 1 manual, 1 connection cable for 12/24 V connection, 1 connection cable for 100 - 240 V connection, removable wire baskets

Product	Ref. No.	Ref. No. UK
Dometic CFX3 100	9600025336	9600025337

/ Optional extras see p.69 – 71

DOMETIC

CLIMATE

Air Condition

Awning

Window

FOOD & BEVERAGE

Coolers

Refrigeration

Cooking

POWER & CONTROL

Energy

Lighting

SAFETY & SECURITY

Driver Support

HYGIENE & SANITATION


Sanitation

Cleaning Accessories

Dometic CFX3 75DZ

Mobile compressor dual-zone cooler, 75 l

D A T G 4.30

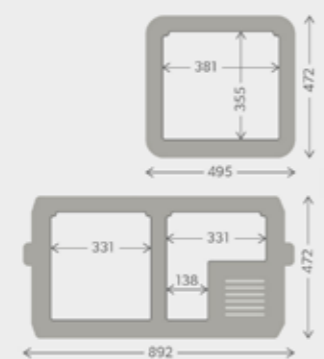


Total Volume	75 l (45/30)
Provides space for	22 (14+8) x 1.5 l bottles 128 (47+81) x 0.33 l cans
Connections	12 / 24 V DC, 100–240 V AC
Temperature range	+20 °C to –22 °C
Power input	59 W
Insulation	PU foam all around
System	• See CFX3 35, page 65
Refrigerant	R134a: 59 g, CO ₂ equivalent: 0.084 t, Global warming potential (GWP): 1430
Quality Features	• See CFX3 35, page 65 • Dual storage compartments allow independently variable temperature control
Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey
Weight	27.8 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
Scope of delivery	1 cooler, 1 manual, 1 connection cable for 12/24 V connection, 1 connection cable for 100 - 240 V connection, removable wire baskets

Product	Ref. No.	Ref. No. UK
Dometic CFX3 75DZ	9600025332	9600025333
/ Optional extras see p.69 – 71		

Dometic CFX3 95DZ

Mobile compressor dual-zone cooler, 94 l

D A T G 4.30



Total Volume	94 l (55/39)
Provides space for	29 (18+11) x 1.5 l bottles 159 (99+60) x 0.33 l cans
Connections	12 / 24 V DC, 100–240 V AC
Temperature range	+20 °C to –22 °C
Power input	61 W
Insulation	PU foam all around
System	• See CFX3 35, page 65
Refrigerant	R134a: 67 g, CO ₂ equivalent: 0.096 t, Global warming potential (GWP): 1430
Quality Features	• See CFX3 35, page 65 • Dual storage compartments allow independently variable temperature control
Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey
Weight	29.8 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
Scope of delivery	1 cooler, 1 manual, 1 connection cable for 12/24 V connection, 1 connection cable for 100 - 240 V connection, removable wire baskets

Product	Ref. No.	Ref. No. UK
Dometic CFX3 95DZ	9600025334	9600025335
/ Optional extras see p.69 – 71		



Battery pack for CFX3, CDF, CFF cooling boxes

Portable lithium batterie



Battery capacity	40 Ah / 512 Wh
Chemistry	Lithium Iron Phosphate (LiFePO4)
Battery voltage	12.8 V DC
DC output	15 A
Continuous output	150 W (per 12 V connection)
Dimensions (W x H x D)	197 x 257 x 197 mm
Weight	7.54 kg
Quality Features	Three-way charging via 12 V socket, solar panel or AC house power, extremely lightweight, ergonomically designed stainless steel carry-handle, built-in LCD screen, suitable for the CFX3, CDF, CF series, powerful battery cells provide 512 Wh of energy, 40 Ah
Scope of delivery	40 Ah Lithium Iron Phosphate battery pack, 10 Amp ACDC charger, DC cable extension with cig plug & Anderson connector, colour gift box packaging
Test marks	IP class IP44

Product	Ref. No.
Dometic PLB40, portable lithium battery, 40 Ah	9600012878



CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

Domestic CoolFreeze CF-CBS

Coolbox stand



Quality Features	Ref. No.
<ul style="list-style-type: none"> No need to strain your back – place your coolbox at a comfortable height The sturdiest stand within its category: load capacity up to 80 kg With a light weight of 2 kg and full collapsibility, transport is easy! 	
Product	Ref. No.
Domestic CoolFreeze CF-CBS	960000689

Domestic CI-FK

Fastening straps for coolboxes



Quality Features	Ref. No.
<ul style="list-style-type: none"> Heavy duty straps Low profile tie-down anchor points 	
Product	Ref. No.
Domestic CI-FK	9108400905

Domestic CFX3 PC

Protective covers for CFX coolers



Quality Features	Ref. No.
<ul style="list-style-type: none"> Durable materials: 1200D nylon and thermo-formed EVA Protection from dirt, sand, moisture, and splashing water Integrated external pockets with zipper 	
Product	Ref. No.
CFX3 25PC	9600028749
CFX3 35PC	9600028455
CFX3 45PC	9600028456
CFX3 55PC	9600028457
CFX3 75PC	9600028458
CFX3 95PC	9600028459
CFX3 100PC	9600028460

Domestic CoolFreeze CFX-QFK / CFX3-QFK3545

Vehicle fixing kits for CFX3 / CFX



Quality Features	Ref. No.
<ul style="list-style-type: none"> Quick release mechanism for easy removal of cooler Easily place your cooler in a secure position No extra tools required 	
Product	Ref. No.
Domestic CoolFreeze CFX-QFK, for CFX3 25 & CFX 28	9600000166
Domestic CoolFreeze CFX3-QFK3545, for CFX3 35 & CFX3 45	9600029599

Domestic CFX3 SLD

Fridge slides for CFX3 / CFX / CF / CFF coolers



Quality Features	Ref. No.
<ul style="list-style-type: none"> Fully extendable—comfortable grip on the provisions 	
Product	Ref. No.
CFX3 SLD3545	9600028548
CFX3 SLD55	9600028549
CFX3 SLD75	9600028550
CFX3 SLD95100	9600028551

EXTENSION	FOR COOLER MODELS	MAX. LOAD CAPACITY
CFX3-SLD3545	CFX3 35, CFX3 45, CFX 35W, CFX 40W, CF 35, CF 40, CF 50, CFF 35, CFF 45	0 – 100 kg
CFX3-SLD55	CFX3 55, CFX3 55SIM, CFX 50W, CFX 65W, CFX 65DZ	0 – 100 kg
CFX3-SLD75	CFX3 75DZ, CF 80, CF 110, CFX 75DZW	0 – 100 kg
CFX3-SLD95100	CFX3 95DZ, CFX3 100, CFX 95DZW, CFX 100W	0 – 115 kg



DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



DOMETIC CFF COMPRESSOR COOLERS

Powerful cooling and clever use of storage space


Dometic CFF series compressor coolers provide energy-efficient cooling, even in high outside temperatures up to +32 °C. Their well-engineered interior makes the most of the available storage capacity. Compact outside dimensions and sturdy handles ensure convenient carrying.

Models available range from a 21-liter compact box to a 70-liter chest cooler with two separate temperature zones for simultaneous cooling and deep-freezing. The two medium-sized models, CFF 35 and CFF 45, offer the unique benefit of a double-sided opening lid, which allows access from either side.

Dometic CFF 20

Mobile compressor cooler, 21 l



	Total Volume	21 l
	Provides space for	6 x 1.5 l bottles 32 x 0.33 l cans
	Connections	12 / 24 V DC, 100–240 V AC
	Temperature range	+20 °C to -18 °C
	Power Input	48 W
	Insulation	PU foam all around
	System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat
	Refrigerant	R134a: 28 g, CO ₂ equivalent: 0.040 t, Global warming potential (GWP): 1430
	Quality Features	<ul style="list-style-type: none"> Energy efficient design provides fast and excellent cooling, even in extremely high outside temperatures Robust, lightweight and compact design ensures excellent portability Removable lid with easy opening latch for convenient cleaning Digital temperature display for convenient setting
	Material	Cabinet: PP + ABS, Lid: PE
	Colour	Pale grey / dark grey
	Weight	10.5 kg
	Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
	Scope of delivery	1 cooler, 1 connection cable for 12/24 V DC connection, 1 connection cable for 100 - 240 V AC connection, 2 carrying handles, 1 manual
	Product	Dometic CFF 20
	Ref. No.	9600028325
	Ref. No. UK	9600028326



Digital temperature display
Dimmable digital temperature display



Strong handles
Secure handles for carrying convenience



CFF 35/45: Double-sided opening lid
Easy access from either side



CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)


HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

Dometic CFF 35


Portable compressor cooler, 34 l



Total Volume	34 l
Provides space for	8 x 1.5 l bottles 54 x 0.33 l cans
Connections	12 / 24 V DC, 100 – 240 V AC
Temperature range	+20 °C to –18 °C
Power Input	53 W
Insulation	PU foam all around
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat
Refrigerant	R134a: 40 g, CO ₂ equivalent: 0.057 t, Global warming potential (GWP): 1430
Quality Features	<ul style="list-style-type: none"> Energy efficient design provides fast and excellent cooling, even in extremely high outside temperatures Double sided opening lid Compact design ensures excellent portability
Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey
Weight	17.2 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
Scope of delivery	1 cooler, 1 connection cable for 12/24 V DC connection, 1 connection cable for 100 - 240 V AC connection, 2 carrying handles, 1 removable wire basket, 1 manual
Product	Ref. No. Ref. No. UK
Dometic CFF 35	9600024842 9600026458

Dometic CFF 70DZ


Mobile dual-zone compressor cooler, 70 l



Total Volume	70 l (30 / 40 l)
Provides space for	17 x 1.5 l bottles 114 x 0.33 l cans
Connections	12 / 24 V DC, 100 – 240 V AC
Temperature range	+20 °C to –18 °C
Power Input	53 W
Insulation	PU foam all around
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat
Refrigerant	R134a: 34 g, CO ₂ equivalent: 0.049 t, Global warming potential (GWP): 1430
Quality Features	<ul style="list-style-type: none"> Dual storage compartments allow independently variable temperature control Generous insulation and effective temperature distribution for excellent cooling performance and energy efficiency Robust construction for outdoor use 3-stage dynamic battery protection system prevents dead car battery or allows deep draw on dual batteries
Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey
Weight	26 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
Scope of delivery	1 cooler, 1 connection cable for 12/24 V DC connection, 1 connection cable for 100 - 240 V AC connection, 2 carrying handles, 2 removable wire baskets, 1 manual
Product	Ref. No. Ref. No. UK
Dometic CFF 70DZ	9600028329 9600028330

Dometic CFF 45

Portable compressor cooler, 44 l



Total Volume	44 l
Provides space for	11 x 1.5 l bottles 75 x 0.33 l cans
Connections	12 / 24 V DC, 100 – 240 V AC
Temperature range	+20 °C to –18 °C
Power Input	53 W
Insulation	PU foam all around
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat
Refrigerant	R134a: 50 g, CO ₂ equivalent: 0.072 t, Global warming potential (GWP): 1430
Quality Features	<ul style="list-style-type: none"> Energy efficient design provides fast and excellent cooling, even in extremely high outside temperatures Double sided opening lid Compact design ensures excellent portability
Material	Cabinet: PP + ABS, Lid: PE
Colour	Pale grey / dark grey
Weight	18.6 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
Scope of delivery	1 cooler, 1 connection cable for 12/24 V DC connection, 1 connection cable for 100 - 240 V AC connection, 2 carrying handles, 1 removable wire basket, 1 manual
Product	Ref. No. Ref. No. UK
Dometic CFF 45	9600012977 9600026459

HYBRID COOLER AND FREEZER

Dometic CK 40D Hybrid

Portable hybrid cooler, 40 l

4.21



Total Volume	40 l
Provides space for	12 x 1.5 l bottles 65 x 0.33 l cans
Connections	230 V AC (compressor) / 12 V DC (thermoelectrics)
Temperature range	AC: +10 °C to -15 °C DC: cooling up to 20 °C below ambient temperature
Power Input	DC: 47 W AC: 75 W
Current consumption at 12 V	3.9 Ah/h at +20 °C ambient temperature, at +5 °C interior temperature
Insulation	PU-foam
System	Thermoelectrics + 230-V compressor, electronic thermostat in compressor mode
Refrigerant	R600a: 15 g, CO ₂ equivalent: 0.0 t, Global warming potential (GWP): 3
Quality Features	Powerful compressor powered by 230 V AC for cooling or freezing; additional thermoelectric unit for use with 12 V battery for cooling only, extra-strong insulation with all-round rubber seal, 38 l capacity has space for 2 l bottles, portable cooler with high efficiency, digital temperature display, continuous temperature adjustment
Material	Cabinet: coated sheet steel, top and base: plastic
Colour	Black
Weight	22 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)

Product	Ref. No.	Ref. No. UK
Dometic CK 40D Hybrid	9600000774	9600026455



Room to cool

Vertical space for 1.5 and 2 l bottles



At a glance

Easy-to-read digital temperature display while in compressor mode



Easy to handle

Deep-freeze function can even keep perishable food fresh

Accessories for compressor coolers

Battery pack for CFX3, CDF, CF cooling boxes

Portable lithium batterie



Battery capacity	40 Ah/ 512 Wh
Chemistry	Lithium Iron Phosphate (LiFePO4)
Battery voltage	12.8 V DC
DC output	15 A
Continuous output	150 W (per 12 V connection)
Dimensions (W x H x D)	197 x 257 x 197 mm
Weight	7.54 kg
Quality Features	Three-way charging via 12 V socket, solar panel or AC house power, extremely lightweight, ergonomically designed stainless steel carry-handle, built-in LCD screen, suitable for the CFX3, CDF, CF series, powerful battery cells provide 512 Wh of energy, 40 Ah
Scope of delivery	40 Ah Lithium Iron Phosphate battery pack, 10 Amp ACDC charger, DC cable extension with cig plug & Anderson connector, colour gift box packaging
Test marks	IP class IP44
Product	Ref. No.
Dometic PLB40, portable lithium battery, 40 Ah	9600012878



Dometic CoolPower EPS 100

Mains adapter, connects 24 V appliances to 230 V mains

- Connects 24 V DC cooling boxes to the mains power socket
- Works well anywhere in the world
- Suitable for fixed installation
- With mains priority circuit for 12 or 24 V batteries

Ref. No. 9600000440



Dometic CoolPower MPS 35

Mains adapter, connects 24 V appliances to 110–240 V mains, 110 W

- Connects 24 V DC cooling boxes to the mains power socket
- Works well anywhere in the world
- Suitable for fixed installation
- With mains priority circuit for 12 or 24 V batteries

Ref. No. 9600000445



Dometic CoolFreeze CF-CDF-FK

Vehicle fixing kit for CF 16–50, CDF 16–46

- For secure use of cooler while on the move
- For safe fastening of cooler
- Universal fixing kit to suit CoolFreeze CF 16 to CF 50, CDF 16 to CDF 46

Ref. No. 9105303708

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



THERMOELECTRIC COOLERS

LIGHTWEIGHT, LOW-COST, VERSATILE – FOR COOLING AND KEEPING FOOD WARM

Lightweight, low-cost, versatile – these are the hallmarks of thermoelectric refrigeration. For the Dometic RV range in this catalogue we have picked our top selling models. CoolFun SC 26T is a practical universal cooler that is great for work and spare time use. It provides active cooling up to 18 °C below the ambient temperature and a USB port in the lid for charging mobile device. The high-tech

coolers in the Tropicool TCX series satisfy highest demands. Their cooling performance up to 27 °C below the ambient temperature qualifies them as the most powerful thermoelectric coolers we've ever made.



TROPICOOOL TCX

THE MOST POWERFUL THERMOELECTRIC COOLERS WE'VE EVER MADE


The popular high-tech appliances in the Tropicool TCX series are the most powerful thermoelectric coolers in the Dometic range. They achieve an impressive cooling performance up to 27 °C below the ambient temperature (TCX 07: 25 °C). If desired, they will also keep food warm. Activating the heating function supplies temperatures of up to +65 °C.


The larger Tropicool TCX models come with some useful technical extras: soft-touch controls with a digital display, intelligent power-save circuit, and an active battery protection system that prevents excessive discharging of the vehicle battery.

Dometic CoolFun SC 26T

4.08

Portable thermoelectric cooler, 25 l


	Total Volume	approx. 25 l
	Provides space for	5 x 1.5 l bottles 37 x 0.33 l cans
	Connections	12 / 24 V DC
	Temperature range	Cooling max. 18 °C below ambient temperature
	Current consumption at 12 V	47 W
	Insulation	PU foam all around
	Quality Features	Versatile carrying handle serves to support or lock the lid, USB port for charging mobile devices, 25 l capacity has room for 21 bottles, cooling up to 18 °C below ambient temperature, 12/24 V DC
	Material	PP
	Colour	Dark grey / pale grey
	Weight	3.7 kg
Test marks	TÜV/GS, E-certified (Automotive EMC Directive)	
Product	Ref. No.	
Dometic CoolFun SC 26T	9600000485	
/ Optional extras		
Mains adapter EPS 817, 230 V AC > 12 V DC	9600000439	

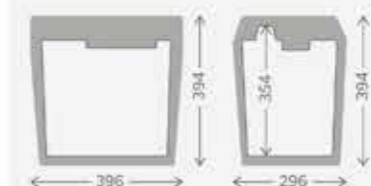


Dometic Tropicool TCX 07

4.36

Mobile thermoelectric cooler, 7 l


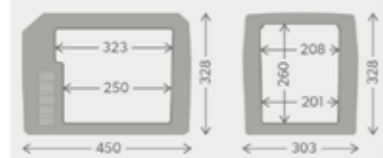
	Total Volume	approx. 7 l
	Connections	12 V DC / 230 V AC
	Temperature range	Cooling max. 25 °C below ambient temperature, heating up to +50 to +65 °C
	Consumption at 12 V DC at 230 V AC	38 W 43 W
	Insulation	PU foam all around
	Material	PP
	Quality Features	Convenient 12 V DC and 230 V AC cooler, refrigerates down to 25 °C below ambient temperature, heats up to +65 °C, dynamic interior ventilation, wear-resistant fan
	Colour	Dark grey / pale grey
	Weight	2.8 kg
	Test marks	TÜV/GS, E-certified (Automotive EMC Directive)
Product	Ref. No.	
Dometic Tropicool TCX 07	9600025390	
/ Optional extras		
Universal fixing kit	9105303709	
Voltage monitor CoolPower M 50U, 12 V, 5 A	9600000446	

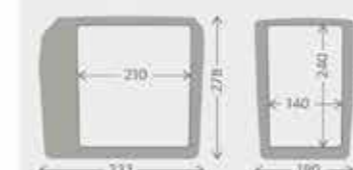

Dometic TropiCool TCX 14

Mobile thermoelectric cooler, 15 l


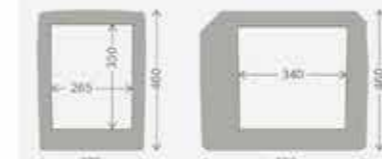
E A G 4.36

	Total Volume	approx. 15 l		
	Provides space for	2 x 1.5 l bottles 22 x 0.33 l cans		
	Connections	12/24 V DC / 230 V AC		
	Temperature range	Cooling max. 27 °C below ambient temperature, heating up to +50 to +65 °C		
	Consumption at 12 V DC	46 W		
	at 24 V DC	50 W		
	at 230 V AC	64 W		
	Insulation	PU foam all around		
	Material	PP		
	Quality Features	Convenient 12 or 24 V DC and 230 V AC cooler, active battery protection prevents deep discharge of the vehicle battery, very efficient TC special electronics with intelligent power-save circuit, reverse polarity protection for hassle-free electrical connections, priority circuit for mains operation, wear-resistant fan for dynamic interior ventilation		
	Colour	Dark grey / pale grey		
	Weight	5.0		
	Test marks	TÜV/GS, E-certified (Automotive EMC Directive)		
	Product		Ref. No.	Ref. No. UK
	Dometic TropiCool TCX 14		9600013319	9600013929
	/ Optional extras			
	Universal fixing kit		9105303709	
	Voltage monitor CoolPower M 50U		9600000446	

Dometic TropiCool TCX 35

Mobile thermoelectric cooler, 33 l

F A G 4.36

	Total Volume	approx. 33 l		
	Provides space for	9 x 1.5 l bottles 50 x 0.33 l cans		
	Connections	12/24 V DC / 230 V AC		
	Temperature range	Cooling max. 27 °C below ambient temperature, heating up to +50 to +65 °C		
	Consumption at 12 V DC	46 W		
	at 24 V DC	50 W		
	at 230 V AC	64 W		
	Insulation	PU foam all around		
	Material	PP		
	Quality Features	See TCX 14		
	Colour	Dark grey / pale grey		
	Weight	10.0 kg		
	Test marks	TÜV/GS, E-certified (Automotive EMC Directive)		
	Product		Ref. No.	Ref. No. UK
	Dometic TropiCool TCX 35		9600013321	9600013931
	/ Optional extras			
	Universal fixing kit		9105303709	
	Voltage monitor CoolPower M 50U		9600000446	

Dometic TropiCool TCX 21

Mobile thermoelectric cooler, 21 l

E A G 4.36

	Total Volume	approx. 21 l		
	Provides space for	5 x 1.5 l bottles 31 x 0.33 l cans		
	Connections	12/24 V DC / 230 V AC		
	Temperature range	Cooling max. 27 °C below ambient temperature, heating up to +50 to +65 °C		
	Consumption at 12 V DC	46 W		
	at 24 V DC	50 W		
	at 230 V AC	64 W		
	Insulation	PU foam all around		
	Material	PP		
	Quality Features	See TCX 14		
	Colour	Dark grey / pale grey		
	Weight	6.0 kg		
	Test marks	TÜV/GS, E-certified (Automotive EMC Directive)		
	Product		Ref. No.	Ref. No. UK
	Dometic TropiCool TCX 21		9600013320	9600013930
	/ Optional extras			
	Universal fixing kit		9105303709	
	Voltage monitor CoolPower M 50U		9600000446	

Accessories for thermoelectric coolers



Dometic CoolPower EPS 817

Mains adapter, from 230 V to 12 V

- Connects 12 V thermoelectric cooling boxes to the 230 V mains socket

Ref. No. 9600000439



Dometic CoolPower M 50U

Battery monitor for universal 12 V applications

- Protects the vehicle battery from excessive discharging
- Switches the cooling box off at low battery voltage and on again at normal voltage
- Ideal for older 12 V thermoelectric cooling devices with cigarette lighter socket as output

Ref. No. 9600000446



Dometic TropiCool TCX-FK

Vehicle fixing kit for TC and TCX 14 – 35 applications

- For secure use of cooler while on the move
- For safe fastening of cooler
- Heavy duty straps

Ref. No. 9105303709

ABSORPTION COOLERS

Noiseless cooling with three energy sources

12 volts DC, 230 volts AC or gas – CombiCool ACX3 absorption coolers from Dometic give you maximum freedom in terms of energy supply. They can be used in the vehicle, on a mains socket or in remote locations where electricity is unavailable. The ACX3 40G is even more versatile, it works on a standard gas cartridge.

All three ACX3 models provide cooling up to 30°C below the ambient temperature. Based on Dometic's well proven absorption cooling technology, they are absolutely noiseless in operation. Another hallmark of the ACX3 family is the elegant aluminium housing with the distinctive lid.



Vertical space for most of the 1.5 & 2.0 L bottles



Sturdy housing and attractive Design



3-stage flame regulation in gas mode, piezo ignition, thermostat regulation in 230-volt mode




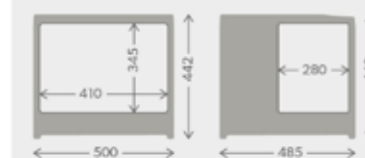
ACX3 40G: Ready for use with 250-g Butane Camping gas cartridge (ø x H): 7 x 20 cm

Dometic CombiCool ACX3 40G

Mobile absorption cooler, 41 l (gas cartridge use)

4.37


	Total Volume	41 l
	Provides space for	11 x 1.5 l bottles 67 x 0.33 l cans
	Connections	12 V DC / 230 V AC, Gas cartridge
	Temperature range	Cooling max. 30 °C below ambient temperature
	Consumption at 12 V DC at 230 V AC Gas	85 W 85 W 12.6 g/h
	Insulation	PU foam all around
	Material	Sturdy precoated steel with PET film
	Quality Features	<ul style="list-style-type: none"> Absolutely silent operation means no disturbance Sturdy housing and attractive design Ice cube tray included Three-stage flame regulation in gas mode Thermostat regulation on 230 V
	Colour	Grey / black
	Weight	16 kg
Test marks	Certified to European Gas Appliance Directive 90/396/EEC	
Product	Ref. No.	
Dometic CombiCool ACX3 40G	9600028414	
Dometic CombiCool ACX3 40G, UK	9600028412	




Dometic CombiCool ACX3 40

Mobile absorption cooler, 41 l

4.37


	Total Volume	41 l
	Provides space for	11 x 1.5 l bottles 67 x 0.33 l cans
	Connections	12 V DC / 230 V AC, LPG
	Temperature range	Cooling max. 30 °C below ambient temperature
	Consumption at 12 V DC at 230 V AC Gas	85 W 85 W 12.6 g/h
	Insulation	PU foam all around
	Material	Sturdy precoated steel with PET film
	Quality Features	<ul style="list-style-type: none"> Absolutely silent operation means no disturbance Sturdy housing and attractive design Ice cube tray included Three-stage flame regulation in gas mode Thermostat regulation on 230 V
	Colour	Grey / black
	Weight	16 kg
Test marks	Certified to European Gas Appliance Directive 90/396/EEC	
Product	Ref. No.	
Dometic CombiCool ACX3 40 (50 mbar) D, CH, A	9600028407	
Dometic CombiCool ACX3 40 (30 mbar) D, CH, A with hose, only permitted for use on a gas socket (coupling)	9600028411	
Dometic CombiCool ACX3 40 (30 mbar) DK, FI, N, S	9600028408	
Dometic CombiCool ACX3 40 (28 - 30 / 37 mbar) UK	9600028409	
Dometic CombiCool ACX3 40 (28 - 30 / 37 mbar) F, I, E, NL	9600028410	

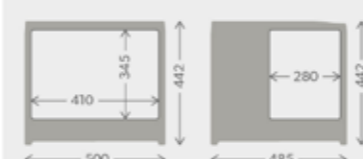


Dometic CombiCool ACX3 30

Mobile absorption cooler, 33 l

4.37

	Total Volume	33 l
	Provides space for	8 x 1.5 l bottles 53 x 0.33 l cans
	Connections	12 V DC / 230 V AC, LPG
	Temperature range	Cooling max. 30 °C below ambient temperature
	Consumption at 12 V DC at 230 V AC Gas	75 W 75 W 50 mbar: 12.3 g/h / 30 mbar: 11.7 g/h
	Insulation	PU foam all around
	Material	Sturdy precoated steel with PET film
	Quality Features	<ul style="list-style-type: none"> Absolutely silent operation means no disturbance Sturdy housing and attractive design Ice cube tray included Three-stage flame regulation in gas mode Thermostat regulation on 230 V
	Colour	Grey / black
	Weight	14 kg
Test marks	Certified to European Gas Appliance Directive 90/396/EEC	
Product	Ref. No.	
Dometic CombiCool ACX3 30 (50 mbar) D, CH, A	9600028403	
Dometic CombiCool ACX3 30 (30 mbar) D, CH, A with hose, only permitted for use on a gas socket (coupling)	9600028413	
Dometic CombiCool ACX3 30 (30 mbar) DK, FI, N, S	9600028404	
Dometic CombiCool ACX3 30 (28 - 30 / 37 mbar) UK	9600028405	
Dometic CombiCool ACX3 30 (28 - 30 / 37 mbar) F, I, E, NL	9600028406	

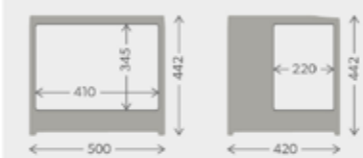

DOMETIC

CLIMATE

Air Condition

Awning

Window

FOOD & BEVERAGE

Coolers

Refrigeration

Cooking

POWER & CONTROL

Energy

Lighting

SAFETY & SECURITY

Driver Support

HYGIENE & SANITATION

Sanitation

Cleaning Accessories



Dometic iceboxes feature an extremely effective insulation system. Fitted with ice packs or ice cubes, they can keep groceries, fish, bait and wild game fresh for several days. The larger models of the popular series (CI 42 – CI 110) can be upgraded with practical accessories: Seat cushions, fishing rod holders and bottle openers make them indispensable companions for fishermen, hunters and other nature lovers. The modular storage system, consisting of wire baskets and dividers, organizes the content.

- Thick insulation and unique sealing design means ice lasts longer
- Hygienic and easy to clean
- Lightweight and easy to carry with strong shoulder strap or handles (depending on model)
- Strong, seamless, food grade polyethylene construction
- Integrated polyethylene feet
- Durable, integrated hinges with stainless steel rods, strong nylon latches and stainless steel fixing screws



Robust

Robust design with unique labyrinth seal.



Easy lock and seal

Lock and seal cold air inside for longer lasting ice.



Tie-down points

Strong handles for tie-down points (WCI 33 and all CI models).

Dometic Cool-Ice WCI 13 / 22 / 33

4.08

Insulation box

	WCI 13	WCI 22	WCI 33
Total Volume (approx.)	13 l	22 l	33 l
Dimensions (W x H x D)	386 x 306 x 241 mm	386 x 314 x 363 mm	400 x 440 x 360 mm
Weight (approx.)	2.8 kg	4.2 kg	5.7 kg
Material	Rotomoulded PE		
Ref. No.	Ref. No.	Ref. No.	
● Stone 9600000500	● Stone 9600000501	● Stone 9600000502	
● Slate 9600049490	● Green 9600019218	● Slate 9600049492	
● Ocean 9600049493	● Slate 9600049491	● Ocean 9600049495	
● Glow 9600049499	● Ocean 9600049494	● Glow 9600049501	
	● Glow 9600049500		

Dometic Cool-Ice CI 42 / 55 / 70

4.08

Insulation box

	CI 42	CI 55	CI 70
Total Volume (approx.)	43 l	56 l	71 l
Dimensions (W x H x D)	640 x 355 x 418 mm	570 x 432 x 515 mm	690 x 432 x 515 mm
Weight (approx.)	8.7 kg	10.6 kg	11.8 kg
Material	Rotomoulded PE		
Ref. No.	Ref. No.	Ref. No.	
● Stone 9600000541	● Stone 9600000542	● Stone 9600000543	
● Green 9600019219			

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

Dometic Cool-Ice CI 85 / 85W / 110

4.08

Insulation box

	CI 85	CI 85W	CI 110
			
			
Total Volume (approx.)	87 l	86 l	111 l
Dimensions (W x H x D)	840 x 432 x 525 mm	840 x 432 x 525 mm	1055 x 442 x 535 mm
Weight (approx.)	14 kg	14.6 kg	18.1 kg
Material	Rotomoulded PE		
Ref. No.	Stone 9600000544	Stone 9600000545	Stone 9600000546

Accessories



Seat Cushion

Lightweight and comfortable seat cushion



Basket

Storage baskets are excellent for maximising storage space in Cool-Ice iceboxes



Divider

Simply insert a divider into the Dometic icebox and create two storage zones



Rod Holder

Easily inserted into the icebox brackets and means you won't miss out on your next catch!



Bottle Opener

Clip it in to the icebox bracket for an easy and reliable way to open your favourite cold drinks



Drink Holder

Easily clips in to the icebox bracket, ensuring a reliable and secure hold for your cold drinks



Bracket

This bracket can be inserted into Dometic CI iceboxes to hold a range of accessories (incl. drinkholder)

Description	Ref. No.
Seat Cushion for CI 42	9108400892
Seat Cushion for CI 55	9108400893
Seat Cushion for CI 70	9108400894
Seat Cushion for CI 85	9108400895
Seat Cushion for CI 110	9108400896
Divider - Small	9108400897
Divider - Large	9108400898
Basket - Small	9108400899
Basket - Large	9108400900

Description	Ref. No.
Beverage Holder & Bracket	9108400901
Beverage Holder	9108400902
Rod Holder (all CI models)	9108400903
Bottle Opener	9108400904
Fixing Kit	9108400905

Accessories for Dometic Cool-Ice CI Iceboxes only

↔️ DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



COOL CONVENIENCE

Refrigerators for motorhomes and caravans

Looking for a refrigerator that fits in the kitchenette of a motorhome, caravan or van? Choose from the most comprehensive range currently available. It includes noiseless absorption refrigerators running on gas or electricity as well as compressor powered appliances for high-performance cooling and deep-freezing regardless of ambient temperatures. Dometic's RV refrigerators are as well equipped as a domestic fridge. If something's missing, check our accessories.

We also offer practical drawer fridges for confined installation conditions.



ABSORPTION REFRIGERATORS

Dometic absorption refrigerators are completely silent. Moreover, they allow maximum independence in terms of energy supply, running on mains or battery power and on gas as well. Their quality features provide homelike convenience.

page 90 – 103



COMPRESSOR REFRIGERATORS

Compressor refrigerators provide powerful cooling and deep-freezing, even at extreme ambient temperatures. They consume little energy and are ideal for solar operation. Available in many sizes, including practical drawer fridges and customised cooling solutions.

page 104 – 117



DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

FREE-STANDING ABSORPTION REFRIGERATORS

Can be placed as required – even next to a bed

Our two free-standing absorption refrigerators can also be installed close to sleeping quarters – they operate without making a noise and won't disturb anybody. Both models are packed with convenient features: two adjustable shelves, two additional door trays, and a secure door lock with vent option for the time after season. The RF 62 even features a two-star freezer compartment.


Designed to give camping friends maximum independence, the CombiCool RF 60 and RF 62 can utilize three different energy sources: 12 V DC, 230 V AC, or camping gas. With their compact dimensions and 56 or 61 liter capacity, they are perfect for under an awning.




Dometic CombiCool RF 62

4.27

Freestanding absorption refrigerator with freezer, 56 l


	Gross capacity with freezer compartment	approx. 56 l 5 l
	Connections	12 V DC / 230 V AC, LPG
	Input rating	
	230 V	110 W
	12 V	110 W
	Gas	14.8 g/h
	Consumption	
	230 V	1.9 kWh/24 h
	12 V	1.9 kWh/24 h
	Gas	325 to 375 g/24 h
Temperature range	Up to 30 °C below ambient temperature	
Insulation	PU foam all around	
Ignition system	Battery ignition	
Material	Cabinet: coated sheet steel, door: plastic, panel: coated sheet steel	
Colour	White	
Dimensions (W x H x D)	486 x 617 x 490 mm	
Weight	25 kg with freezer compartment	
Quality features	Thermostat regulation in 230-volt and gas mode, two door shelves, adjustable shelves, flame indicator, door locking with vent option	
Test marks	Certified to European Gas Appliance Directive 90/396/EEC	
Product	Ref. No.	
Dometic RF 62 (50 mbar) D	9105203590	
Dometic RF 62 (28 – 37 mbar) F, I, E, NL	9105203591	
Dometic RF 62 (30 mbar) DK	9105203623	




Dometic CombiCool RF 60

4.27

Freestanding absorption refrigerator, 61 l

	Gross capacity	approx. 61 l
	Connections	12 V DC / 230 V AC, LPG
	Input rating	
	230 V	110 W
	12 V	110 W
	Gas	14.8 g/h
	Consumption	
	230 V	1.9 kWh/24 h
	12 V	1.9 kWh/24 h
	Gas	325 to 375 g/24 h
Temperature range	Up to 30 °C below ambient temperature	
Insulation	PU foam all around	
Ignition system	Battery ignition	
Material	Cabinet: coated sheet steel, door: plastic, panel: Aluminium	
Colour	Black / aluminium	
Dimensions (W x H x D)	486 x 615 x 490 mm	
Weight (approx. kg)	26 kg	
Quality features	Thermostat regulation in 230-volt and gas mode, two door shelves, adjustable shelves, flame indicator, door locking with vent option	
Test marks	Certified to European Gas Appliance Directive 90/396/EEC	
Product	Ref. No.	
Dometic RF 60 (50 mbar) D, CH, A	9105203240	
Dometic RF 60 (30 mbar) D, CH, A Supplied with hose, only permitted for use on a gas socket	9105203244	
Dometic RF 60 (30 mbar) DK, FIN, N, S	9105203241	
Dometic RF 60 white (30 mbar) DK, FIN, N, S	9105203602	
Dometic RF 60 (28 – 37 mbar) F, I, E, NL	9105203243	
Dometic RF 60 (28 – 37 mbar) UK	9105203242	



DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



BUILT-IN ABSORPTION REFRIGERATORS

AMAZING CHOICE OF MODELS, SIZES AND CONFIGURATIONS


Do you want to integrate a noiseless absorption fridge into the kitchenette of a recreational or utility vehicle? Take your pick from the world's largest range. The compact classics in the 5-series are our recommendation for panel vans. 8-series fridges come in two widths and are fitted as standard with a patented removable freezer

compartment. Our award-winning 10-series absorption refrigerators integrate a host of unique innovations: double-hinged doors opening either left and right, elegant aluminium handles across the entire height, and a new cooling unit for best-in-class cooling performance, to name but a few.

Dometic RMV 5305

Absorption refrigerator, 73 l, reversible hinged, AES

4.28



Gross capacity with freezer compartment	73 l
freezer compartment	8 l
Connections	12 V DC / 230 – 240 V AC
Input rating	
230 V	135 W
12 V	130 W
Gas	18.3 g/h
Consumption	
230 V	2.4 kWh/24 h
12 V	3.12 kWh/24 h
Gas	270 g/24 h
Temperature range	Refrigerator +7 °C, freezer compartment up to -12 °C at ambient temperatures up to 32 °C (equivalent to climate class SN)
Insulation	PU foam all around
Ignition system	AES
Material	Cabinet: coated sheet steel, door: plastic, panel: coated aluminium
Colour	Grey
Dimensions (W x H x D)	486 x 821 x 479 mm
Weight	24.5 kg with freezer compartment
Quality features	<ul style="list-style-type: none"> Removable freezer compartment Optimised shelf fixture – rattle-free Door with safe and robust push lock
Test marks	Certified to European Gas Appliance Directive 90/396/EEC, e-certified (Automotive EMC Directive)
Product	Dometic RMV 5305
Ref. No.	9500001325

Dometic RM 5310

Absorption refrigerator, 60 l, left hinged, battery ignition

4.28



Gross capacity with freezer compartment	60 l
freezer compartment	5 l
Connections	12 V DC / 230 V AC / LPG 30 mbar
Input rating	
230 V	125 W
12 V	120 W
Gas	18.3 g/h
Consumption	
230 V	2.5 kWh/24 h
12 V	2.5 kWh/24 h
Gas	270 g/24 h
Temperature range	Refrigerator +7 °C, freezer compartment up to -12 °C at ambient temperatures up to 32 °C (equivalent to climate class SN)
Insulation	PU foam all around
Ignition system	Battery ignition
Material	Cabinet: coated sheet steel, door: plastic, panel: coated aluminium
Colour	Grey
Dimensions (W x H x D)	486 x 618 x 474 mm
Weight	20 kg with freezer compartment
Quality features	Door with magnetic seal, reversible door hinges, door lock with vent option, user-friendly control panel, adjustable shelf, thermostat regulation in 230-volt mode and with gas, battery-powered ignition unit, interior light
Test marks	Certified to European Gas Appliance Directive 90/396/EEC, e-certified (Automotive EMC Directive)
Product	Dometic RM 5310
Ref. No.	9105703857
Ref. No. UK	9105704417

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION









[Sanitation](#)

[Cleaning Accessories](#)

Dometic upgrade kits

Upgrade kits for 10-series refrigerators

4.24

	NAME	DESCRIPTION	SCOPE OF DELIVERY	REF. NO.
	Dometic RC 10.4S 70-UKIT	Upgrade kit for Dometic RC 10.4S 70 fridge variant to gain all preferable features of the Dometic RML 10.4T 70	1 dual hinged door, 1 door rack, 1 fridge shelf	9600028492
	Dometic RC 10.4S 90-UKIT	Upgrade kit for Dometic RC 10.4S 90 fridge variant to gain all preferable features of the Dometic RC 10.4T 90	1 dual hinged door, 1 door rack, 1 fridge shelf	9600028493
	Dometic RM(S)/RCS 10.5S-UKIT	Upgrade kit for RM 10.5S, RMS 10.5S and RCS 10.5S fridge variant to gain all preferable features of the Dometic RM 10.5T, RMS 10.5T and RCS 10.5T	1 dual hinged door, 1 door rack, 1 fridge shelf	9600028478
	Dometic RMS/RCS 10.5XS-UKIT	Upgrade kit for RMS 10.5XS and RCS 10.5XS fridge variant to gain all preferable features of the Dometic RMS 10.5XT and RCS 10.5XT	1 dual hinged door, 1 door rack, 1 fridge shelf	9600028479
	Dometic RMD/RCD 10.5S-UKIT	Upgrade kit for the RMD 10.5S and RCD 10.5S fridge variant to gain all preferable features of the RMD 10.5X and RCD 10.5T fridge range	2 dual hinged doors, 1 door rack, 1 fridge shelf, 1 veggie fresh lid	9600028181
	Dometic RMD/RCD 10.5XS-UKIT	Upgrade kit for the RMD 10.5XS and RCD 10.5XS fridge variant to gain all preferable features of the RMD 10.5X and RCD10.5XT fridge range	2 dual hinged doors, 1 door rack, 1 fridge shelf, 1 veggie fresh lid	9600028421
	Dometic RML 10.4S-UKIT	Upgrade kit for Dometic RML 10.4S refrigerator and Dometic RCL 10.4S fridge variant to gain all preferable features of the Dometic RML 10.4 and RCL 10.4 fridge range	1 dual hinged door, 1 door rack, 1 fridge shelf, 1 veggie fresh lid	9600025706
	Dometic RCL 10.4ES-UKIT	Upgrade kit for Dometic RCL 10.4ES refrigerators	1 dual hinged door, 1 door rack, 1 fridge shelf, 1 veggie fresh lid	9600050037



Dometic REF-FGC

Flexible gas connection pipe for 10 series absorption refrigerators

Ref. No. 9600025853



Dometic RML10.4-RPLKIT

RML 94xx replacement kit for installation of RML 10.4 refrigerators

If you already have an RML 94xx-series device installed in your vehicle, this replacement kit allows you to mount the new RML 10.4-series refrigerator into existing cut-outs. Decor bars and a flexible gas connection hose are included to ensure a seamless integration.

Ref. No. 9600025974



Dometic RMD10.5-RCK

Shelf for RMD 10.5 freezer compartment

Well-organized storage: you can optimise the use of the space in the freezer compartment your 10-series fridge with an additional shelf.

Ref. No. 9600015432



Dometic REF-ADAPT

Power adapter for 10-series absorption refrigerators

10-series absorption refrigerators come standard with a WAGO plug for connection to 230/240 V AC. If required it can be adapted to the following plug systems:

230/240 V CEE plug / Ref. No. 9600015437
230/240 V UK plug / Ref. No. 9600015438
230/240 V JST plug / Ref. No. 9600015439
230/240 V MNL plug / Ref. No. 9600015440



Dometic REF-FANKIT

Ventilation kit for 10-series absorption refrigerators

- The ventilation set is very easy to install
- It ensures optimum ventilation of your fridge for best cooling performance
- This kit is particularly recommended for high ambient temperatures or intense sunlight

Ref. No. 9600017061



Dometic R10-BP

Battery pack for Dometic 10-series absorption refrigerators

- Completely self-sufficient refrigerator operation without any external power supply
- Perfect integration – Easy to apply and not visible if door is closed
- Works with standard AA batteries
- Easy to handle

Ref. No. 9600015427



Dometic REF-STOKIT

Storage kit for refrigerators

- Space-saving food storage with stackable trays in two heights
- Tray holders keep the stacks securely in place during the journey
- Ice cube tray with sliding lid for easy removal of the required amount
- Designed for 10-series and also suitable for other refrigerators

Ref. No. 9600006299

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

ACCESSORIES FOR ABSORPTION REFRIGERATORS



Winter covers

- Winter covers are available for both single and double door fridges
- Replace your cover at the start of the cold winter season
- Covers help to maintain a high cooling performance in cold weather

Dometic WA 120/130
Winter cover set for LS 100 and LS 200, white
Ref. No. 9105900018

Dometic WA 120/130
Winter cover set for for LS 100 and LS 200, black
Ref. No. 9500001460

Dometic EWS 300
Winter cover set for LS 300, white
Ref. No. 9105900017



Ventilation grills

The two ventilation grills LS 100 and LS 200 have been designed for under-counter refrigerators of the RM, RMS and RMV series. The LS 100 model is only required for installations with a separate exhaust duct. Otherwise, you can use the LS 200, which is suitable for ventilation at the top and at the bottom of the fridge.

The LS 300 is a perfect fit for the large refrigerators in the RMD and RMDT series, while the LS 230 is the matching ventilation grill for the slim RML refrigerators.

LS 100, top, RM(V)5xxx, RM(S)8xxx
Ref.-No. white 9500000958 /
Ref.-No. black 9500001457

LS 200, bottom, RM(V)5xxx, RM(S)8xxx
Ref.-No. white 9500000959
Ref.-No. black 9500001458

LS 300 RMD(T)8xxx, RML855x, RMD(T)10.5
Ref.-No. white 9600003006

LS 230, RML8230, RML8330, RML(T)9xxx,
RML10.4 / Ref. No. white 9500001459



Dometic LS-R500

Roof ventilation for 8- and 4-series refrigerators

Extra ventilation of the 8- and 4-series refrigerators. Use in combination with LS 200 or LS 300 ventilation grill.

- Optional extra ventilation for the 8- and 4-series refrigerators
- Combine with LS 200 or LS 300 ventilation grills
- Recommended when using an awning cover

Ref. No. 9105900020



Dometic AR-EGG

Egg shelf for absorption refrigerators

For safe storage of up to six eggs. Suitable for all Dometic refrigerators.

Ref. No. 9105900009



Dometic AR-ACF

Active carbon filter for refrigerators

Eliminates odours in cooling appliances and other closed receptacles.

Ref. No. 9105900008



Dometic AR-BI

Battery ignition for absorption refrigerators

This battery ignition is suitable for retrofitting on all piezo refrigerators with plastic dashboard holders.

Ref. No. 9105900010



Dometic AR-VKIT

Ventilation kit for absorption refrigerators

Optional ventilation extra for optimal performance of 4-series and 8-series refrigerators. Thermostat-controlled, extremely easy to install.

- The ventilation set is very easy to install
- It ensures optimum ventilation of your fridge for best cooling performance
- This kit is particularly recommended for high ambient temperatures or intense sunlight

Ref. No. 9105900007



Shelf instead of a freezer compartment

Create your own space: after removal of the freezer compartment, you can optimise use of the space in your 8-series fridge with an additional shelf.

RM/S 8400/1 / Ref. No. 9105703589
RM/S 8500/1/5 / Ref. No. 9105703587
RM 8551/5 / Ref. No. 9105703588



Dometic REF-STOKIT

Storage kit for refrigerators

- Space-saving food storage with stackable trays in two heights
- Tray holders keep the stacks securely in place during the journey
- Ice cube tray with sliding lid for easy removal of the required amount
- Designed for 10-series and also suitable for other refrigerators

Ref. No. 9600006299

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)


SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

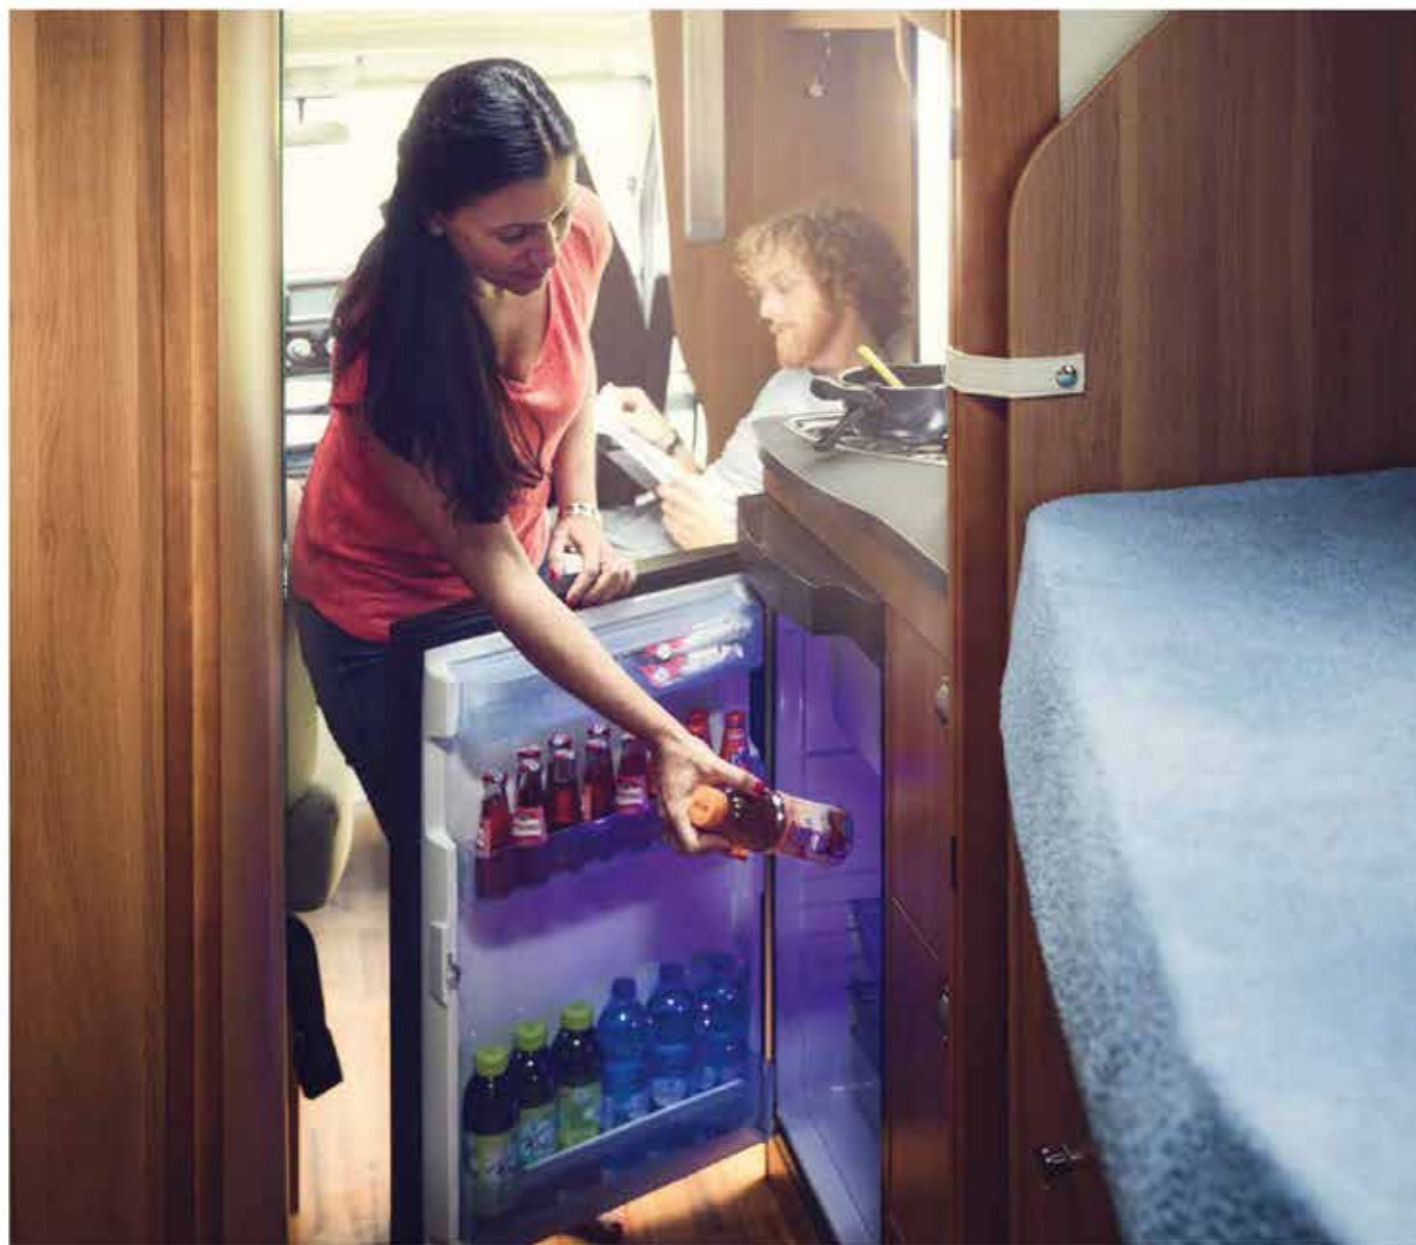

COMPRESSOR REFRIGERATORS

Powerful cooling and deep-freezing

High-performance cooling and deep-freezing, economical energy consumption – this is what you can expect from every Dometic compressor device. The 3-in-1 refrigerators in the CRX series can be used as a fridge, freezer or a combination of both. We also offer jumbo-size models up to 177 litres, practical pull-out fridges

and spacesaving top loaders. Our new 10-series RC compressor refrigerators are a perfect fit for the Fiat Ducato and same design panel vans. They combine future-oriented design with the best cooling performance in their class.

Dometic CoolMatic CRP 40 / CRP 40S




Compressor refrigerators, 12 / 24 V DC

	CRP 40	CRP 40S
	Storage volume	39 l
	freezer compartment	5.3 l
Connections	12 / 24 V DC	
Average power consumption	45 W	
Current consumption at 12 V	1.5 Ah/h at +25 °C ambient temperature, 1.8 Ah/h at +32 °C ambient temperature, both at +5 °C interior temperature	
Refrigerant	R134a, Refrigerant quantity: 38 g, CO ₂ equivalent: 0.054 t, Global warming potential (GWP): 1430	
Insulation	PU foam all around	
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, mechanical, continuously variable thermostat	
Material	Body: with coated metal frame Plastic interior/door frame: plastic, Fittings: stainless steel	Body: with coated metal frame Interior: plastic, fittings: stainless steel Door: stainless steel (AISI316)
Colour	Cabinet: black Door frame: silver Door panel: matt-silver (brushed stainless steel appearance)	Cabinet: black Door frame: silver Door panel: stainless steel (V4A)
Quality features	Matt-silver decorative panel, brackets secure bottles	High-quality stainless steel front, brackets secure bottles
Weight	19 kg	21 kg
Test marks	TÜV/GS, e-certified (Automotive EMC Directive)	
Product	Ref. No.	
Dometic CoolMatic CRP 40	9105204517	
Dometic CoolMatic CRP 40S	9105204441	
/ Optional extras		
Mains adapter MPS 35, 110–240 V > 24 V	9600000445	
Standard installation frame CRP 40	9105306405	
Standard installation frame CRP 40S	9105305676	
Flush-mount installation frame CRP 40	9105306410	
Flush-mount installation frame CRP 40S	9105305671	

Dometic CoolMatic CRX 50 / 50S / 65 / 65S

4.24

Compressor refrigerators, 12 / 24 V DC

	CRX 50	CRX 50S
CRX 50/50S		
		
Storage volume	45 l	45 l
freezer compartment	4.4 l	4.4 l
Connections	12 / 24 V DC	
Average power consumption	40 W	
Current consumption at 12 V	1.1 Ah/h at +25 °C ambient temperature, 1.7 Ah/h at +32 °C ambient temperature, both at +5 °C interior temperature	
Refrigerant	R134a, Refrigerant quantity: 38 g, CO ₂ equivalent: 0.054 t, Global warming potential (GWP): 1430	
Insulation	PU foam all around	
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, mechanical, continuously variable thermostat	
Material	Body: with coated metal frame Plastic interior/door frame: plastic, Fittings: stainless steel	Body: with coated metal frame Interior: plastic, fittings: stainless steel Door: stainless steel (AISI316)
Colour	Cabinet: black Door frame: silver Door panel: matt-silver (brushed stainless steel appearance)	Cabinet: black Door frame: silver Door panel: stainless steel (V4A)
Quality features	Matt-silver decorative panel, brackets secure bottles	High-quality stainless steel front, brackets secure bottles
Weight	17 kg	
Test marks	TÜV/GS, e-certified (Automotive EMC Directive)	
	CRX 65	CRX 65S
CRX 65/65S		
		
Storage volume	57 l	57 l
freezer compartment	7 l	7 l
Average power consumption	45 W	
Refrigerant	R134a, Refrigerant quantity: 42 g, CO ₂ equivalent: 0.060 t, Global warming potential (GWP): 1430	
Current consumption at 12 V	1.14 Ah/h at +25 °C ambient temperature, 1.8 Ah/h at +32 °C ambient temperature, both at +5 °C interior temperature	
Weight	18 kg	19 kg
Further technical data as for CRX 50/CRX 50S		
Product	Ref. No.	
Dometic CoolMatic CRX 50	9105306565	
Dometic CoolMatic CRX 50S	9105306566	
Dometic CoolMatic CRX 65	9105306568	
Dometic CoolMatic CRX 65S	9105306569	
/ Optional extras		
Mains adapter MPS 35, 110-240 V > 24 V	9600000445	
Standard installation frame CRX 50	9105306405	
Standard installation frame CRX 50S	9105305676	
Flush-mount installation frame CRX 50	9105306410	
Flush-mount installation frame CRX 50S	9105305671	
Standard installation frame CRX 65	9105306406	
Standard installation frame CRX 65S	9105305677	
Flush-mount installation frame CRX 65	9105306411	
Flush-mount installation frame CRX 65S	9105305672	

Dometic CoolMatic CRD 50/50S / CRX 65D / 65DS

4.24

Pull-out compressor refrigerator

	CRD 50	CRX 65D	CRD 50S	CRX 65DS
	Models with stainless steel effect front		Models with stainless steel front	
CRD 50				
CRD 50S				
CRD 50/S				
CRX 65D				
CRX 65DS				
CRX 65D /S				
Storage volume	38.5 l	57 l	38.5 l	57 l
freezer compartment	6 l	7 l	6 l	7 l
Connections	12 / 24 V DC			
Temperature range	+10 to -12 °C			
Average power consumption	40 W	45 W	40 W	45 W
Insulation	PU foam all around			
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, mechanical, continuously variable thermostat			
Refrigerant	R134a, Refrigerant quantity: 38 g, CO ₂ equivalent: 0.054 t, Global warming potential (GWP): 1430			
Material	Body: with coated metal frame Plastic interior/door frame: plastic, Fittings: stainless steel	Body: with coated metal frame Interior: plastic, fittings: stainless steel Door: stainless steel (AISI316)	Body: with coated metal frame Plastic interior/door frame: plastic, Fittings: stainless steel	Body: with coated metal frame Interior: plastic, fittings: stainless steel Door: stainless steel (AISI316)
Colour	Cabinet: black Door frame: silver Door panel: matt-silver (brushed stainless steel appearance)	Cabinet: black Door frame: silver Door panel: stainless steel (V4A)	Cabinet: black Door frame: silver Door panel: matt-silver (brushed stainless steel appearance)	Cabinet: black Door frame: silver Door panel: stainless steel (V4A)
Quality features	Matt-silver decorative panel, brackets secure bottles	High-quality stainless steel front, brackets secure bottles	Matt-silver decorative panel, brackets secure bottles	High-quality stainless steel front, brackets secure bottles
Weight	17 kg	20 kg	18 kg	21 kg
Test marks	TÜV/GS, e-certified (Automotive EMC Directive)			
Product	Ref. No.			
Dometic CoolMatic CRD 50	9105306581			
Dometic CoolMatic CRD 50S	9105306582			
Dometic CoolMatic CRX 65D	9105306540			
Dometic CoolMatic CRX 65DS	9105306548			
/ Optional extras				
Mains adapter MPS 35, 110 V - 240 V > 24 V	9600000445			
Standard installation frame CRD 50	9105306405			
Standard installation frame CRD 50S	9105305676			
Flush-mount installation frame CRD 50	9105306410			
Flush-mount installation frame CRD 50S	9105305671			
Standard installation frame CRX 65D	9105306406			
Standard installation frame CRX 65DS	9105305677			
Flush-mount installation frame CRX 65D	9105306411			
Flush-mount installation frame CRX 65DS	9105305672			

Dometic CoolMatic CRX 80 / 80S / 110 / 110S

4.24


Compressor refrigerators, 12 / 24 V DC

	CRX 80	CRX 80S
		
CRX 80/80S		
	475	528
	640	
Storage volume	78 l	
freezer compartment	7.5 l	
Connections	12 / 24 V DC	
Average power consumption	48 W	
Current consumption at 12 V	1.19 Ah/h at +25 °C ambient temperature, 2.0 Ah/h at +32 °C ambient temperature, both at +5 °C interior temperature	
Refrigerant	R134a, Refrigerant quantity: 48 g, CO ₂ equivalent: 0.069 t, Global warming potential (GWP): 1430	
Insulation	PU foam all around	
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, mechanical, continuously variable thermostat	
Material	Body: with coated metal frame Plastic interior/door frame: plastic, Fittings: stainless steel	Body: with coated metal frame Interior: plastic, fittings: stainless steel Door: stainless steel (AISI316)
Colour	Cabinet: black Door frame: silver Door panel: matt-silver (brushed stainless steel appearance)	Cabinet: black Door frame: silver Door panel: stainless steel (V4A)
Quality features	Matt-silver decorative panel, brackets secure bottles	High-quality stainless steel front, brackets secure bottles
Weight	20 kg	21 kg
Test marks	TÜV/GS, e-certified (Automotive EMC Directive)	
	CRX 110	CRX 110S
		
CRX 110 / 110S		
	520	558
	745	
Storage volume	104 l	
freezer compartment	9 l	
Average power consumption	50 W	
Current consumption at 12 V	1.8 Ah/h at +25 °C ambient temperature, 2.4 Ah/h at +32 °C ambient temperature, both at +5 °C interior temperature	
Refrigerant	R134a, Refrigerant quantity: 47 g, CO ₂ equivalent: 0.067 t, Global warming potential (GWP): 1430	
Weight	22.5 kg	23.5 kg
Further technical data as for CRX 80/CRX 80S		
Product	Ref. No.	
Dometic CoolMatic CRX 80	9105306570	
Dometic CoolMatic CRX 80S	9105306571	
Dometic CoolMatic CRX 110	9105306572	
Dometic CoolMatic CRX 110S	9105306573	
/ Optional extras		
Mains adapter MPS 35, 110–240 V > 24 V	9600000445	
Standard installation frame CRX 80	9105306407	
Standard installation frame CRX 80S	9105305678	
Flush-mount installation frame CRX 80	9105306412	
Flush-mount installation frame CRX 80S	9105305673	
Standard installation frame CRX 110	9105306408	
Standard installation frame CRX 110S	9105305679	
Flush-mount installation frame CRX 110	9105306413	
Flush-mount installation frame CRX 110S	9105305674	

Dometic CoolMatic CRX 140 / 140S

4.24

Compressor refrigerators, 12 / 24 V DC

	CRX 140	CRX 140S
		
CRX 140		
	619	625
		815
Storage volume	130 l	
freezer compartment	11 l	
Connections	12 / 24 V DC	
Average power consumption	65 W	
Current consumption at 12 V	1.9 Ah/h at +25 °C ambient temperature, 2.5 Ah/h at +32 °C ambient temperature, both at +5 °C interior temperature	
Refrigerant	R134a, Refrigerant quantity: 50 g, CO ₂ equivalent: 0.072 t, Global warming potential (GWP): 1430	
Insulation	PU foam all around	
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, mechanical, continuously variable thermostat	
Material	Body: with coated metal frame Plastic interior/door frame: plastic, Fittings: stainless steel	Body: with coated metal frame Interior: plastic, fittings: stainless steel Door: stainless steel (AISI316)
Colour	Cabinet: black Door frame: silver Door panel: matt-silver (brushed stainless steel appearance)	Cabinet: black Door frame: silver Door panel: stainless steel (V4A)
Quality features	Matt-silver decorative panel, brackets secure bottles	High-quality stainless steel front, brackets secure bottles
Weight	30 kg	31 kg
Test marks	TÜV/GS, e-certified (Automotive EMC Directive)	
Product	Ref. No.	
Dometic CoolMatic CRX 140	9600029646	
Dometic CoolMatic CRX 140S	9600029647	
/ Optional extras		
Standard installation frame CRX 140	9105306409	
Standard installation frame CRX 140S	9105305680	
Flush-mount installation frame CRX 140	9105306414	
Flush-mount installation frame CRX 140S	9105305675	

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



COOL EFFICIENCY

10-Series compressor fridges




Our award-winning left/right absorption refrigerators have changed the way food and drinks are kept fresh in motorhomes and caravans. And now the success story continues with a complete series of compressor-powered fridges featuring the same design: RCD 10.5

and RCL 10.5 models for large vehicles, RC 10.4 for campervans, and – coming soon – RCS 10.5 for installation under the counter. Simply choose the matching model for your motorhome, caravan or campervan.

Dometic RCD 10.5T / 10.5XT

Compressor refrigerator, TFT display, 2 double-hinged doors

4.11

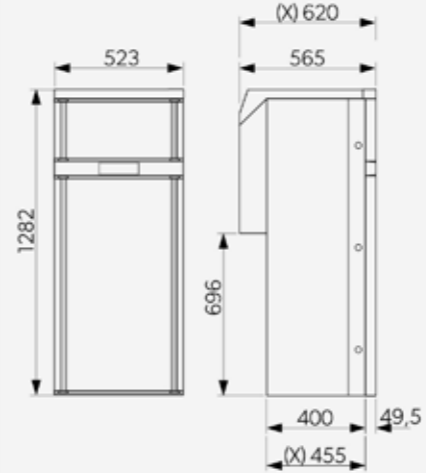	RCD 10.5T	RCD 10.5XT EXTRA-DEEP CABINET
RCD 10.5T		
RCD 10.5XT		
Gross capacity	153 l	177 l
Net capacity main compartment	124 l	142 l
Net capacity freezer compartment	29 l	35 l
Connections	12 V DC	12 V DC
Climate class	ST	ST
Current consumption at 12 V	2.42 Ah/h at +25 °C ambient temperature, at +5 °C interior temperature	2.5 Ah/h at +25 °C ambient temperature, at +5 °C interior temperature
Refrigerant	R134a, Refrigerant quantity: 44 g, CO ₂ equivalent: 0.057 t, Global warming potential (GWP): 1430	R134a, Refrigerant quantity: 44 g, CO ₂ equivalent: 0.057 t Global warming potential (GWP): 1430
Insulation	PU foam all around	
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection	
Material	Cabinet: coated sheet steel + plastic / door, panel: plastic	
Colour	Cabinet and door frame: black / door panel: black glossy finish (door decor changeable)	
Dimensions (W x H x D)	523 x 1282 x 535 mm	523 x 1282 x 605 mm
Weight	34.5 kg	39.5 kg
Quality Features	<ul style="list-style-type: none"> Patented double-hinged doors – open left and right without the need to change the hinge Separate doors for the fridge and freezer VG Fresh crisper with adjustable humidity – keeps fruit and vegetables fresh for longer Elegant aluminum door handles extend over the complete fridge height Internal ventilation system – no further ventilation grills required for installation Easy to use controls with intuitive TFT color display and turn/push button Reliable compressor cooling and deep-freezing – ST Class (up to 38 °C ambient temperature) 	
Test marks	TÜV/GS, e-certified (Automotive EMC Directive)	
		
Product	Ref. No.	
Dometic RCD 10.5T	9600027684	
Dometic RCD 10.5XT	9600028301	

DOMETIC

CLIMATE

Air Condition

Awning

Window

FOOD & BEVERAGE

Coolers

Refrigeration

Cooking

POWER & CONTROL

Energy

Lighting

SAFETY & SECURITY

Driver Support

HYGIENE & SANITATION

Sanitation

Cleaning Accessories

Dometic RCL 10.4ET


Compressor refrigerator, 151 l, TFT display, double-hinged door

4.24



Gross capacity	151 l
Net capacity main compartment	128 l
Net capacity freezer compartment	18 l
Connections	12 V DC
Climate class	ST
Current consumption at 12 V	1.87 Ah/h at +25 °C ambient temperature, at +5 °C interior temperature
Refrigerant	R600a, Refrigerant quantity: 31 g, CO ₂ equivalent: 1.2 kg, Global warming potential (GWP): 3
Insulation	PU foam all around
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection
Material	Cabinet: coated sheet steel + plastic / door, panel: plastic
Colour	Cabinet and door frame: black / door panel: black glossy finish (door decor changeable)
Dimensions (W x H x D)	420 x 1293 x 595 mm
Weight	31 kg
Quality Features	<ul style="list-style-type: none"> • Double-hinged door – opens left and right without the need to change the hinge • Patented removable freezer compartment with double-hinged door • VG Fresh crisper with adjustable humidity – keeps fruit and vegetables fresh for longer • Elegant aluminum door handles extend over the complete fridge height • Intuitive control with TFT color display and turn/push button • Flat door with customizable decor panel (variable thickness 1.2 mm – 3 mm) • Reliable compressor cooling and deep-freezing – ST Class (up to 38 °C ambient temperature)

Test marks TÜV/GS, e-certified (Automotive EMC Directive)

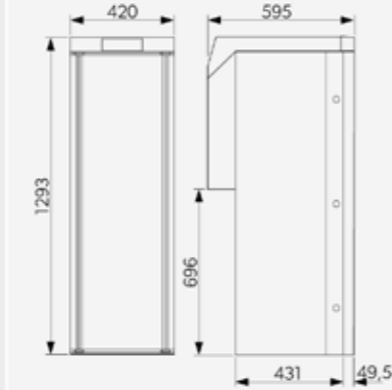

Product	Ref. No.
Dometic RCL 10.4ET	9600049608



CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

Dometic RC 10.4

Compressor refrigerators, TFT display, double-hinged door


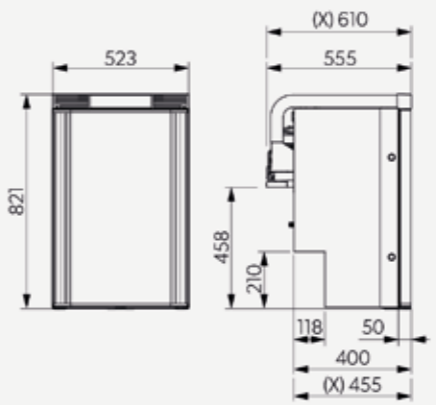
4.11

	RC 10.4 70	RC 10.4 90
		
Gross capacity	69 l	90 l
Net capacity main compartment	54.5 l	75.5 l
Net capacity freezer compartment	7.5 l	7.5 l
Connections	12 V DC	12 V DC
Climate class	T	T
Current consumption at 12 V	1.39 Ah/h at +25 °C ambient temperature, at +5 °C interior temperature	1.39 Ah/h at +25 °C ambient temperature, at +5 °C interior temperature
Refrigerant	R134a, Refrigerant quantity: 40 g, CO ₂ equivalent: 0.057 t, Global warming potential (GWP): 1430	R134a, Refrigerant quantity: 43 g, CO ₂ equivalent: 0.061 t, Global warming potential (GWP): 1430
Insulation	PU foam all around	
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection	
Material	Cabinet: coated sheet steel + plastic / door, panel: plastic	
Colour	Cabinet and door frame: black, Door panel: black glossy finish (door decor changeable)	
Weight	19.5 kg	21.5 kg
Quality Features	<ul style="list-style-type: none"> • Double-hinged door – opens left and right without the need to change the hinge • Patented removable freezer compartment (opens to the bottom) • Ease of use with intuitive TFT color display and turn/push button • Reliable cooling and deep-freezing – even at extreme ambient temperatures up to 43 °C • Elegant aluminum door handles extend over the complete fridge height • Internal ventilation system – no further ventilation grills required • Pleasantly quiet operation in night mode, fast cool-down with boost function 	
Test marks	TÜV/GS, e-certified (Automotive EMC Directive)	
		
Product	Ref. No.	
Dometic RC 10.4 70	9600028399	
Dometic RC 10.4 90	9600028400	

Dometic RCS 10.5T / 10.5XT



Compressor refrigerators, TFT display, double-hinged door, under counter models

4.11

	RCS 10.5T	RCS 10.5XT EXTRA-DEEP CABINET
		
Gross capacity	83 l	98 l
Net capacity main compartment	69.1 l	80.3 l
Net capacity freezer compartment	9.2 l	12.1 l
Connections	12 V DC	12 V DC
Climate class	ST	ST
Current consumption at 12 V	1.46 Ah/h at +25 °C ambient temperature, at +5 °C interior temperature	1.48 Ah/h at +25 °C ambient temperature, at +5 °C interior temperature
Refrigerant	R600a, Refrigerant quantity: 24 g, CO ₂ equivalent: 0.000072t, Global warming potential (GWP): 3	R600a, Refrigerant quantity: 23 g, CO ₂ equivalent: 0.000072t, Global warming potential (GWP): 3
Insulation	PU foam all around	
System	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection	
Material	Cabinet: coated sheet steel + plastic / door, panel: plastic	
Colour	Cabinet and door frame: black / door panel: black glossy finish (door decor changeable)	
Dimensions (W x H x D)	528 x 821 x 548 mm	523 x 821 x 610 mm
Weight	24.5 kg	25 kg
Quality Features	<ul style="list-style-type: none"> • Double-hinged door – opens left and right without the need to change the hinge • Patented removable freezer compartment (opens to the bottom) • Smart use of space: under counter model with wheel arch cut-out • Elegant aluminum door handles extend over the complete fridge height • Easy to use with intuitive TFT color display and turn/push button • Flexible interior storage with two small crispers • Reliable compressor cooling and deep-freezing – ST Class (up to 38 °C ambient temperature) 	
Test marks	TÜV/GS, e-certified (Automotive EMC Directive)	
		
Product	Ref. No.	
Dometic RCS 10.5T	9600028196	
Dometic RCS 10.5XT	9600028199	

Dometic CoolMatic CD 20 / CD 20W / CD 20S / CD 30 / CD 30W / CD 30S

Compressor drawer fridge, 12 / 24 V DC

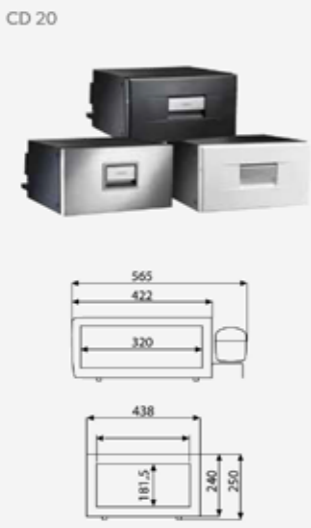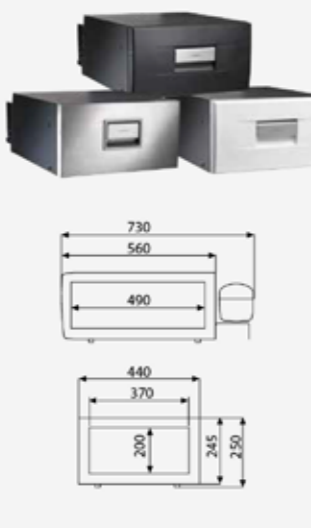		CD 20 / CD 20W / CD 20S
 <p>CD 20</p>	Storage volume	20 l
	Connections	12 / 24 V DC
	Average power consumption	40 W
	Current consumption at 12 V	0.67 Ah/h at +20 °C ambient temperature, 1.33 Ah/h at +32 °C ambient temperature, both at +5 °C interior temperature
	Refrigerant	R134a, Refrigerant quantity: 38 g, CO ₂ equivalent: 0.054 t, Global warming potential (GWP): 1430
	Insulation	PU foam all around
	System	Fully hermetic compressor with integrated control electronics, electronic thermostat, low voltage protection / electronic fuse, automatic reverse pole protection
	Material	Sturdy metal housing, drawer of injection-moulded parts
	Colour	CD 20: black CD 20W: black, front white CD 20S: black, stainless steel
	Quality features	Convenient access with easy-pull drawers running on ball bearing slides, temperature regulation with continuously variable thermostat, unlocking and opening with a single movement, safe locking mechanism. A smart solution in confined spaces: the cooling unit can be fitted to the side of the cooler (left/right), or up to 1.5 metres away.
Weight	16.1 kg	
Test marks	e-certified (Automotive EMC Directive)	
		CD 30 / CD 30W / CD 30S
 <p>CD 30</p>	Storage volume	30 l
	Refrigerant	R134a, Refrigerant quantity: 42 g, CO ₂ equivalent: 0.060 t, Global warming potential (GWP): 1430
	Colour	CD 30: black CD 30W: black, front white CD 30S: black, stainless steel
	Weight	18 kg
	Further technical data as for CD 20 / CD 20W / CD 20S	
	Product	Ref. No.
	Dometic CoolMatic CD 20	9600008369
	Dometic CoolMatic CD 20W	9600008371
	Dometic CoolMatic CD 20S	9600008370
	Dometic CoolMatic CD 30	9105330621
Dometic CoolMatic CD 30W	9105330622	
Dometic CoolMatic CD 30S	9105330620	
/ Optional extras		
Mains adapter EPS 100, 230 V > 24 V	9600000440	
Mains adapter MPS 35, 110–240 V > 24 V	9600000445	
Stainless steel installation frame	9105303901	

Dometic CoolMatic CB 36 / CB 40

Built-in compressor cooler, 12 / 24 V DC

4.11

		CB 36	CB 40
	Storage volume	36 l	40 l
	Connections	12 / 24 V DC	
	Temperature range	+10 to -12 °C	
	Average power consumption	45 W	
	Current consumption at 12 V	0.56 Ah/h at +20 °C ambient temperature, 0.94 Ah/h at +32 °C ambient temperature, both at +5 °C interior temperature	0.64 Ah/h at +20 °C ambient temperature, 1.01 Ah/h at +32 °C ambient temperature, both at +5 °C interior temperature
	Refrigerant	R134a, Refrigerant quantity: 60 g, CO ₂ equivalent: 0.086 t, Global warming potential (GWP): 1430	
	Insulation	PU foam all around	
	System	Fully hermetic compressor with integrated control electronics, electronic thermostat, low voltage protection / electronic fuse, automatic reverse pole protection	
	Material	Outside: zinc coated sheet steel, inside: white coated steel, base: shock-resistant plastic	
	Colour	Body: grey, decor panel: pale grey	
Weight	17 kg	19 kg	
Test marks	TÜV/GS, e-certified (Automotive EMC Directive)		
Product		Ref. No.	
Dometic CoolMatic CB 36		9105204661	
Dometic CoolMatic CB 40		9105204658	
/ Optional extras			
Mains adapter MPS 35, 110–240 V > 24 V		9600000445	

↔️ DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



THE DOMETIC KITCHEN COLLECTION

Treasure trove for creative vehicle designers

Designing a functional kitchen in the confined spaces of a recreational or utility vehicle takes creative ideas and the “hardware” to match. From now on you can spare the effort of screening the market for suitable products. All you need to realise your kitchen concepts is here, in the Dometic range – from hobs, ovens and sinks to cooker

hoods, coffee makers and microwave ovens. And in various different sizes, shapes and design options. Dometic appliances add value to mobile kitchens and pleasure to cooking on wheels. Take your pick from a collection that makes mobile living easy.



OVENS, HOBS & SINKS

Do you want to equip a mobile kitchen? Dometic gives you a wide choice of options: ovens, hobs, sinks and space-saving combinations. Some models come with a heat-resistant glass lid that extends the worktop space when closed.

PAGE 120 – 125



KITCHEN ACCESSORIES

Taps and siphons for Dometic sinks, and a practical device for indicating the fill level of gas bottles – you’ll find it all in our accessory collection.

PAGE 126 – 127



COOKER HOODS

Fresh air in the vehicle: Dometic cooker hoods quickly remove cooking fumes. They do their job just as well as a domestic cooker hood – with integrated lights, easy controls and a washable grease filter.

PAGE 128 – 129



COFFEE MAKERS

Freshly brewed coffee at all times: Mobile coffee makers for one or five cups – handy and safe to use, and absolutely roadworthy.

PAGE 130 – 131



MICROWAVE OVENS

Fast and convenient cooking on the go: 17-litre microwave ovens with 3 or 5 cooking levels plus defrosting function. Rugged design, easy cleaning, interior light.

PAGE 132 – 133

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



Admittedly, kitchens in motorhomes, caravans and vans are far smaller than a home kitchen, but they can be just as well equipped. Dometic offers everything required. Choose from a hand-picked collection of cookers, ovens, sinks and hob-sink combinations. Some models have a heat-resistant glass lid that can be folded down when the cooking is done to extend the worktop areas. It's just one example of how smart Dometic products help make the best possible use of the available space.

Dometic OV 1800

4.30

Oven



Voltage	12 volts DC (electric ignition)
Output	1.1 kW
Gas consumption	80 g/h
Gas supply pressure	30 mbar
Oven capacity	18 litres
Quality Features	Heat-resistant and panoramic glass door, thermostat, electronic 12-volt ignition, interior light, bottom-hinged door, enamelled baking tray, stainless steel rack
Weight	13.7 kg
Dimensions (W x H x D)	410 x 311 x 490 mm
Built-in dimensions (W x H x D)	398 x 360 x 490 mm
Product	Ref. No
Dometic OV 1800	9103303708

Dometic OG 2000 / OG 3000

4.30

Oven with grill




	OG 2000	OG 3000
Voltage	12 volts DC (electric ignition)	12 volts DC (electric ignition)
Output	1.2 kW (oven), 1.6 kW (grill)	1.2 kW (oven), 1.6 kW (grill)
Gas consumption	87 g/h (oven), 116 g/h (grill)	87 g/h (oven), 116 g/h (grill)
Gas supply pressure	30 mbar	30 mbar
Oven capacity	20 litres	30 litres
Quality Features	Thermostat, interior light, electronic 12-volt ignition, safety ignition system, grill, bottom-hinged door, chimney connection, rotary plate, multi-layered glass door with safety locking	Thermostat, interior light, electronic 12-volt ignition, safety ignition system, grill, bottom-hinged door, chimney connection, rotary plate, multi-layered glass door with safety locking, rack and baking tray all included
Weight	13.2 kg	19.45 kg
Dimensions (W x H x D)	530 x 310 x 410 mm	530 x 430 x 415 mm
Built-in dimensions (W x H x D)	504 x 283 x 460 mm	500 x 410 x 460 mm
Product	Ref. No	
Dometic OG 2000		9103303710
Dometic OG 3000		9103303709

Dometic PI8022

2-burner hob with glass lid


3.33

	Output	1 x 1.1 kW; 1 x 1.8 kW
	Gas consumption	204 g/h
	Gas supply pressure	30 mbar
	Dimensions (W x H x D)	480 x 90.5 x 370 mm
	Built-in dimensions (W x D)	466 x 358 mm
	Weight (kg)	3.6 kg
Quality Feature	Heat-resistant safety glass lid, chrome-plated pan support, stainless steel burner caps, safety ignition system, operating elements on the inside	
Product	Ref. No	
Dometic PI8022	9600027606	

Dometic HBG 2335 / HBG 3445

2-burner or 3-burner hob with glass lid


4.30

	HBG 2335	HBG 3445
		
Output	1 x 1.1 kW; 1 x 1.6 kW	2 x 1.1 kW; 1 x 1.6 kW
Gas consumption	189 g/h	262 g/h
Gas supply pressure	30 mbar	30 mbar
Weight	4 kg	6 kg
Dimensions (W x H x D)	460 x 80 x 335 mm	520 x 80 x 445 mm
Built-in dimensions (W x D)	440 x 315 mm	510 x 435 mm
Quality Features	Heat-resistant safety glass lid, enamelled pan support, enamelled burner caps, safety ignition system	
Product	Ref. No	
Dometic HBG 2335, 2-burner hob	9600037309	
Dometic HBG 3445, 3-burner hob	9600037313	

Dometic HBG 3440

3-burner hob with glass lid


4.30

	Voltage	12 volts DC (electric ignition)
	Output	1 x 1.1 kW; 2 x 1.6 kW
	Gas consumption	335 g/h
	Gas supply pressure	30 mbar
	Weight	5.0 kg
	Dimensions (W x H x D)	560 x 78 x 440 mm
Built-in dimensions (W x D)	546 x 428 mm	
Quality Features	Lid made of heat-resistant safety glass, enamelled pan support, enamelled burner caps	
Product	Ref. No	
Dometic HBG 3440	9600027608	

Dometic HSG 2445

2-burner hob/sink combination with glass lid


4.30

	Output	1 x 1.0 kW; 1 x 1.6 kW
	Gas consumption	190 g/h
	Gas supply pressure	30 mbar
	Weight	6 kg
	Dimensions (W x H x D)	600 x 146 x 445 mm
	Built-in dimensions (W x D)	590 x 435 mm
Quality Features	Heat-resistant safety glass lid, enamelled pan support, enamelled burner caps, tap fitting inside, safety ignition system, siphon, rubber seal, with hole for tap (Ø 27 mm)	
Product	Ref. No	
Dometic HSG 2445	9103301741	

Dometic MO9722R / MO9722L

2-burner hob / sink combination with glass lids


4.30

	Voltage	12 volts DC (electric ignition)
	Output	1 x 1.1 kW; 1 x 1.8 kW
	Gas consumption	204 g/h
	Gas supply pressure	30 mbar
	Weight	6 kg
	Dimensions (W x H x D)	760 x 325 x 179 mm
Built-in dimensions (W x D)	742 x 283 mm	
Quality Features	2 heat-resistant safety glass lids, enamelled pan support, enamelled burner caps, safety ignition system, siphon AC 540, rubber seal, with hole for tap (Ø 39 mm)	
Product	Ref. No	
MO9722R (sink right)	9600037321	
MO9722L (sink left)	9600037322	

Dometic HSG 2370R / HSG 2370L

2-burner hob/sink combination with glass lids

4.30

	Output	1 x 1.1 kW; 1 x 1.6 kW
	Gas consumption	204 g/h
	Gas supply pressure	30 mbar
	Weight	7 kg
	Dimensions (W x H x D)	900 x 152 x 370 mm
	Built-in dimensions (W x D)	793 x 307 mm
Quality Features	2 heat-resistant safety glass lids, enamelled pan support, enamelled burner caps, Piezo ignition, safety ignition system, AC 540 siphon, rubber seal, with hole for tap (Ø 39 mm)	
Product	Ref. No	
HSG 2370R (sink on right)	9600037324	
HSG 2370L (sink on left)	9600037325	

Dometic SNG 4237

4.30


Square sink with glass lid

	Quality Features	Heat-resistant safety glass lid, AC 540 siphon, rubber seal, with hole for tap (Ø 39 mm)
	Weight	2.9 kg
	Dimensions (W x H x D)	420 x 145 x 370 mm
	Built-in dimensions (W x D)	405 x 355 mm
Product		Ref. No
Dometic SNG 4237		9600027599
/ Optional extra		
AC 539 tap		9102300076

Dometic SNG 4244

4.30


Square sink with glass lid

	Quality Features	Heat-resistant safety glass lid, AC 540 siphon, rubber seal, with hole for tap (Ø 39 mm)
	Weight	3.35 kg
	Dimensions (W x H x D)	420 x 145 x 440 mm
	Built-in dimensions (W x D)	405 x 425 mm
Product		Ref. No
Dometic SNG 4244		9600027602
/ Optional extra		
AC 539 tap		9102300076

Dometic SNG 4133

4.30

Square sink with glass lid

	Quality Features	Heat-resistant safety glass lid, siphon, rubber seal
	Weight	4 kg
	Dimensions (W x H x D)	410 x 124 x 335 mm
	Built-in dimensions (W x D)	400 x 325 mm
Product		Ref. No
Dometic SNG 4133		9600028267
/ Optional extra		
AC 539 tap		9102300076

Dometic SNG 420

4.30

Round sink with glass lid

	Quality Features	Heat-resistant safety glass lid, AC 540 siphon, rubber seal, with hole for tap (Ø 39 mm)
	Weight	3.5 kg
	Dimensions (Ø x H)	420 x 149 mm
	Built-in dimensions (Ø)	400 mm
Product		Ref. No
Dometic SNG 420		9600027592
/ Optional extra		
AC 539 tap		9102300076

Dometic VA928

4.30


Round sink

	Dimensions (Ø x H)	400 x 130 mm
	Installation dimension	366 mm
	Weight	1 kg
	Product	
Dometic VA928		9600028261

Dometic VA910 / VA930

4.30

Square sinks

		VA910	VA930
	Dimensions (W x H x D)	370 x 125 x 370 mm	280 x 145 x 380 mm
	Built-in dimensions (W x D)	336 x 336 mm	272 x 372 mm
	Weight	1.13 kg	1 kg
Product		Ref. No	
Dometic VA910		9600027597	
Dometic VA930		9102300052	

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



ACCESSORIES FOR MOBILE KITCHENS

TAPS AND SIPHONS TO MATCH DOMETIC SINKS

Installation conditions differ from project to project. This is why all Dometic sinks are supplied without taps and siphons. You will easily find the right size, shape and configuration here, in the accessory range.

And, not forgetting, a gas checker for identifying the fill level of gas bottles.

Dometic GasChecker GC100

4.30

Indicator for identifying the fill level of all standard propane and butane gas bottles



- Reliable level measurements using ultrasound
- Easy to use
- Suitable for all steel and aluminium gas bottles with a diameter of 200 – 350 mm (with the exception of self refilling bottles)
- Optimal accessory also for gas BBQ's owners

Product	Ref. No
Dometic GasChecker GC100	9103500697

Dometic TAP AC 539

4.30

Chrome colored water tap with single lever



Max. water pressure	1.5 bar
Max. water temperature	65°C
Material/ colour	Plastic/ chrome

Product	Ref. No
Dometic tap AC 539	9102300076

Dometic tap AC 537

4.30

Chrome water tap



Max. water pressure	1.5 bar
Max. water temperature	65°C
Material/ colour	Brass/ chrome

Product	Ref. No
Dometic tap AC 537	9102300077

Dometic siphons

4.30

Dometic siphons



Dometic siphons	
Product	Ref. No
AC 530 Siphon, angled waste fitting, Ø 25 mm	9102300082
AC 535 Siphon, straight waste fitting, Ø 25 mm	9102300083
AC 540 Siphon, angled waste fitting, Ø 20 mm	9102300084
AC 545 Siphon, straight waste fitting, Ø 20 mm	9102300085
AC 557 Siphon, double waste fitting, Ø 25 mm	9102300086



DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)


[Cleaning Accessories](#)



Dometic CK 2000

3.36


Air recirculation cooker hood with two-speed fan

	Voltage	12 volts DC
	Capacity	max. 38/45 m ³ /h
	Power consumption	Fan: 5 watts Light: 4 watts (2 x 2 watts), energy efficiency class A+
	Weight	2.2 kg
	Dimensions (W x H x D)	400 x 56 x 280 mm
	Quality Features	<ul style="list-style-type: none"> Activated carbon air filters and halogen lamps are easy to replace with snap-on release mechanism High efficiency means low power consumption of just 5 W Washable metal grease filter Two integrated halogen lights with two lighting levels Two-speed fan setting
	Product	Ref. No
	Dometic CK 2000*, black	9103303094
	Dometic CK 2000*, silver	9106505224
	/ Accessory	
	Activated carbon filter for CK 2000 (Pack of two)	9107300007

Dometic CK 500

3.36

Built-in exhaust cooker hood with 3-speed fan


	Voltage	12 volts DC
	Capacity	max. 100 m ³ /h
	Power Input	35 watts
	Weight	3 kg
	Dimensions (W x H x D)	530 x 60 x 204 mm (+16 mm for the exhaust hose adapter)
	Roof cutout (Ø)	110 mm
	Roof dome dimensions (H x Ø)	72 x 190 mm
	Roof thickness	from 25 mm
	Length exhaust hose	1.20 m incl. mounting kit for exhaust hose Ø 60 mm
	Quality Features	LED lighting (3 watts, warm white, energy efficiency class: A, energy consumption in 1000 hours.: 3 kWh)
	Product	Ref. No
	Dometic CK 500*	9106506287

*The cooker hoods shown are designed for use in leisure accommodation vehicles and not for use in homes.

Dometic CK 400

3.36


Exhaust cooker hood with 2-speed fan

	Voltage	12 volts DC
	Capacity	70/125 m ³ /h
	Power Input	30 watts
	Weight	3 kg
	Dimensions (W x H x D)	400 x 45 x 275 mm
	Roof opening (Ø)	105 mm
	Roof dome dimensions (H x Ø)	64 x 200 mm
	Test marks	e5-approved
	Quality Features	Metal grease filter, 2 lighting levels with LED bulbs (2 x 2 watts / 12 V, GU4, energy efficiency class A+, energy consumption in 1000 hours: 4 kWh)
	Product	Ref. No
	Dometic CK 400*	9103303093

Dometic CK 150

3.36


Built-in exhaust cooker hood with 1-speed fan

	Voltage	12 volts DC
	Capacity	115 m ³ /h
	Power Input	30 watts
	Weight	1.9 kg
	Dimensions (W x H x D)	400 x 45 x 165 mm
	Cupboard recess (W x D)	381 x 142 mm
	Roof opening (Ø)	105 mm
	Roof dome dimensions (H x Ø)	64 x 200 mm
	Test marks	e5-approved
	Quality Features	1-speed fan, washable metal grease filter, 2-level lighting with halogen bulbs (1 x 20 watts/12 volts, GU5.3, energy efficiency class C, energy consumption in 1000 hours: 20 kWh) robust plastic roof dome
	Product	Ref. No
	Dometic CK 150*	9103303095

Dometic GY 11

3.36

Roof ventilator with motor

	Voltage	12 volts DC
	Capacity	70/125 m ³ /h
	Power Input	30 watts
	Weight	0.6 kg
	Roof dome dimensions (H x Ø)	64 x 200 mm
	Material	Robust plastic roof dome
	Quality Features	2-speed fan, powerful ventilation even when the engine is turned off (3 to 12 m ³ /h at wind speed of 1 to 4 m/s)
	Product	Ref. No
	Dometic GY 11*	9107300318

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



COFFEE MAKERS AND MICROWAVE OVENS

Must haves for the RV kitchen


What would an RV kitchen be, without such handy helpers like a coffee machine or a microwave oven? The Dometic cooking range includes well-proven gadgets for every demand: coffee makers for one or five cups and two robust microwave ovens with features that can well compare to a modern household microwave oven.

All devices are specially designed for mobile use. They come with the right connection, and with accessories for safe and secure installation in the vehicle.

Dometic PerfectCoffee MC 01

1-cup-coffee maker


3.13

	Capacity	150 ml
	Voltage	12 or 24 V DC
	Average power consumption	12 V: 180 W 24 V: 250 W
	Quality Features	Quick brewing time, automatic switch-off, boil-dry protection, permanent filter, status indicator, uses coffee powder, incl. coffee mug
	Weight	0.8 kg
	Dimensions (W x H x D)	135 x 190 x 110 mm (incl. fixing kit)
	Test marks	Food-safe according to the German Foodstuff and Consumer Goods Act (LMBG)
	Product	Ref. No
	Dometic PerfectCoffee MC 01, 12 V	9600000338
	Dometic PerfectCoffee MC 01, 24 V	9600000339
/ Optional extras		
Extra coffee mug, black	9103555734	

Dometic PerfectCoffee MC 052 / MC 054

Coffee maker for 5 cups

3.13

	Capacity	5 cups (625 ml)
	Voltage	12 or 24 V DC
	Average power consumption	12 V: 170 W 24 V: 300 W
	Quality Features	Swing filter can be turned for easier use, integrated transport securing device for glass pot, hotplate with thermostat, fixing kit for wall or desk mounting
	Weight	1.1 kg
	Dimensions (W x H x D)	240 x 270 x 155 mm (incl. fixing kit)
	Test marks	Food-safe according to the German Foodstuff and Consumer Goods Act (LMBG)
	Product	Ref. No
	Dometic PerfectCoffee MC 052, 12 V	9600000340
	Dometic PerfectCoffee MC 054, 24 V	9600000341

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

Dometic MWO 24

24 V microwave oven

3.47



Voltage	24 V DC
Capacity	17 litres
Power consumption	500 W (microwave) / 960 W (battery)
Colour	black
Dimensions (W x H x D)	445 x 279 x 335 mm
Weight (kg)	9.8 kg
Quality features	<ul style="list-style-type: none"> User-friendly microwave with intuitive design 3 different cooking levels (175 / 270 / 500 W), defrost function Memory button for often used settings Easy to clean, integrated ceramic plate, no moving parts Robust design for the road and with convenient features Safety function: warning beeps for 180 sec. when door is opened and after cooking LED illuminated cavity Includes two fixing brackets
Test marks	E-approved (Automotive EMC Directive)
Scope of delivery	Microwave oven, universal fixing kit
Product	Ref. No
Dometic MWO 24	9600000535

Dometic MWO 240

230 V microwave oven

3.47



Voltage	230 V, 50 Hz
Capacity	17 litres
Microwave power	700 W
Colour	black
Dimensions (W x H x D)	451 x 283 x 353 mm
Weight	11.5 kg
Quality features	<ul style="list-style-type: none"> User-friendly microwave with five cooking levels Defrosting function Integrated, easy-to-clean ceramic plate Approved by leading RV manufacturers Illuminated to easily check on the microwave's contents Locking system to prevent unwanted opening LED display and cooking end signal
Test marks	Intertek GS, NCC approved
Scope of delivery	Microwave oven
Product	Ref. No
Dometic MWO 240, EU plug	9600008377
Dometic MWO 240, UK plug	9600028283



Plug-n-play
with 24 V power supply connector



User-friendly controls
with large, easy-to-read digits and display symbols



Added convenience
LED interior light lets you see how your food is doing



User-friendly
large, easy-to-read digits and display symbols



Integrated ceramic plate
easy to clean, no moving parts



Added convenience
interior light to see the cooking progress of your food

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



ELECTRONIC ACCESSORIES FOR MOBILE POWER SUPPLY

From battery chargers to generators

You create the conditions that ensure your customers will never run out of power on board and on site. Dometic's Power & Control range is here to support you with smart electronic accessories.

When it comes to providing a 230-volt source, you can rely on the well proven generators in the TravelPower or TEC series. Or use one of our inverters, which generate 230 volts AC from battery power.

On the following pages you can also find solutions for a well-working DC network. Regardless of whether you are looking for a reasonably priced voltage converter to run a 12-volt appliance on 24 volts, or a high-quality device for stabilizing the supply voltage – whatever you need is here. Elegant lighting solutions and smart control devices add the finishing touch to this range.



BATTERY CHARGERS AND BATTERY CARE

Automatic chargers with IUOU characteristics for fast and gentle charging of gel, AGM and wet batteries. Battery conditioners for a longer service life.

page 136 – 139



VOLTAGE CONVERTERS & CHARGING CONVERTERS

Compact voltage converters for running 12-volt devices in 24 volt circuits. Charging converters for reliable charging of leisure batteries while driving.

page 140 – 143



INVERTERS

230-volt AC from 12 or 24-volt battery power. Inverters with pure sine wave voltage. Lightweight and compact or with very high peak output power for consumers with high start-up currents.

page 144 – 147



CONTROLS & PANELS

Instant access to all critical information. User-friendly, intuitive control panels and a smart battery management system for efficient use of mobile energy resources.

page 148



BATTERY PACKS

Superior lithium ion battery technology for an unprecedented level of independence. Portable for off-grid or off-road use.

page 149



GENERATORS

230 volts AC on standby – Dometic generators ensure a power supply in places without a mains.

page 150 – 155



COOL POWER

Power supplies for coolers and refrigerators

page 156 – 157



LIGHTS

Elegant lighting solutions with energy-saving LED technology. Recessed and surface-mounted spots, low-profile LED modules, smart power supply.

page 158 – 161

BATTERY CHARGING AND BATTERY CARE

Smart technology makes the most of precious battery power

The Dometic range provides state-of-the-art charging technology for maximum availability of mobile battery power. MCA series automatic chargers are compact, lightweight and easy to install. MCP series chargers with intuitive one-button operation are ideal for modern start-stop batteries. PerfectPower DCC charging converters

give batteries an optimal charge during the drive – even in modern vehicles with an energy-saving smart alternator. Well proven battery care products prevent premature battery ageing and failure – highly recommendable for seasonal vehicles.

Dometic PerfectCharge MCA 1215 / 1225 / 1235 / 1250

3.39

IU0U battery charger

	MCA 1215	MCA 1225	MCA 1235	MCA 1250
Charge outputs	1 + 1	2 + 1	2 + 1	3
Input voltage	90 – 260 V			
Frequency	50 – 60 Hz			
End-of-charging voltage	14.4 / 14.7 V			
Float charging voltage	13.8 V			
Recommended battery capacity	40 – 170 Ah	75 – 300 Ah	100 – 400 Ah	150 – 60 Ah
U0 phase limited at	8 h			
Energy efficiency up to	92 %			
Charging current	15 A	25 A	35 A	50 A
Operating temperature	– 20 to +50 °C			
Dimensions (W x H x D)	179 x 63 x 238 mm	179 x 63 x 238 mm	179 x 63 x 274 mm	208.5 x 75 x 283 mm
Weight	1.6 kg	1.7 kg	1.9 kg	3.1 kg
Type of protection	IP 21			
Product			Ref. No.	Ref. No. UK
PerfectCharge MCA 1215			9600000028	9600000179
PerfectCharge MCA 1225			9600000029	9600000180
PerfectCharge MCA 1235			9600000030	9600000181
PerfectCharge MCA 1250			9600000031	9600000182
/ Optional extras				
Temperature sensor MCA-TS1			9600000099	
Remote control MCA-RC1			9600000100	
Controller MPC 01			9102500073	
Hella sensor MCA-HS1			9600000101	

Dometic PerfectCharge MCA 1280 / 2415 / 2425 / 2440

3.39

IU0U battery charger



	MCA 1280	MCA 2415	MCA 2425	MCA 2440
Charge outputs	3	2	3	3
Input voltage	90 – 260 V			
Frequency	50 – 60 Hz			
End-of-charging voltage	14.4 / 14.7 V	28.8 / 29.4 V		
Float charging voltage	13.8 V		27,6	
Recommended battery capacity	200 – 800 Ah	40 – 170 Ah	75 – 300 Ah	100 – 400 Ah
U0 phase limited at	8 h		8 or 16 h	
Energy efficiency up to	92 %			
Charging current	80 A	12.5 A	25 A	40 A
Operating temperature	– 20 to +50 °C			
Dimensions (W x H x D)	208.5 x 75 x 303 mm	179 x 63 x 238 mm	208.5 x 75 x 283 mm	208.5 x 75 x 303 mm
Weight	4 kg	1.6 kg	2.9 kg	3.9 kg
Type of protection	IP 21			
Product			Ref. No.	Ref. No. UK
PerfectCharge MCA 1280			9600000032	9600000183
PerfectCharge MCA 2415			9600000033	9600000184
PerfectCharge MCA 2425			9600000034	9600000185
PerfectCharge MCA 2440			9600000035	9600000186
/ Optional extras				
Temperature sensor MCA-TS1			9600000099	
Remote control MCA-RC1			9600000100	
Controller MPC 01			9102500073	
Hella sensor MCA-HS1			9600000101	



Dometic PerfectCharge MCP 1204 / MCP 1207

3.16


Battery chargers

	MCP 1204	MCP 1207
		
		
Charge outputs	1 (very flexible thanks to plug connector)	
Charging characteristic	8 step	
Input voltage	230 V (180 – 253 V)	
Charging current max.	4 A	7 A
Recommended battery capacity	Charging: 7 – 110 Ah/ maintenance charging: 7 – 180 Ah	Charging: 15 – 160 Ah/ maintenance charging: 15 – 250 Ah
Dimensions (W x H x D)	90 x 55 x 220 mm	90 x 55 x 250 mm
Weight	0.5 kg	0.7 kg
Product	Ref. No.	
PerfectCharge MCP 1204	9600000026	
PerfectCharge MCP 1207	9600000027	
/ Optional extras		
Battery indicator BI 01	9600000094	
Wall cradle	9102500079	

Dometic PerfectCharge IU 812

3.16

IUOU charger for 12 V wet, gel and AGM batteries


	Charge outputs	1
	Input voltage	230 V (180 – 253 V)
	Frequency	50 – 60 Hz
	End-of-charging voltage	14.4 V
	Float charging voltage	13.6 V
	Max. battery capacity	100 Ah
	Charging current	8 A
	Charging characteristics	IUOU with limit time of the IUO phase
	Operating temperature	0 to +50 °C
	Dimensions (W x H x D)	120 x 70 x 200 mm
	Weight	0.9 kg
	Quality Features	Overload/short-circuit protection, Can be used as mains supply unit
	Product	Ref. No.
	PerfectCharge IU 812	9600000037



Dometic PerfectBattery BR 12

3.16


Battery refresher, 12 volts

	Input voltage	12 V DC
	Cut-in voltage	> 12.6 ± 0.2 V
	Standby current	< 0.2 mA
	Battery terminals	1
	Dimensions (W x H x D)	100 x 67 x 25
	Weight	0.12
	Test marks	e-approved (Automotive EMC Directive)
	Product	Ref. No.
	PerfectBattery BR 12	9600000093

Dometic PerfectBattery BC 100

3.16

Battery conditioner, 12 volts

	Input voltage	230 V AC (180 – 253 V)
	Input Frequency	50 – 60 Hz
	Battery terminals	1
	End-of-charging voltage	13.8 V DC
	Float charge voltage	13.0 V
	Charging control	3 LEDs
	Max. Charging current	1.0 A
	Operating temperature	-20 to +50 °C
	Dimensions (W x H x D)	70 x 100 x 60 mm
	Weight	0.45 kg
	Quality features	Overload and short-circuit protection
	Product	Ref. No.
	PerfectBattery BC 100	9600000092



VOLTAGE CONVERTERS

For running 12-volt devices on 24-volt batteries

Inexpensive, ultra-compact voltage converters in switch-mode design for operation of 12 volt appliances in 24 volt circuits. Inexpensive converters (PerfectPower DCDC 06 to DCDC 24) are often absolutely fine for running a 12 volt appliance on a 24 volt battery. Computers, monitors, measuring instruments and other sensitive appliances require a constant and stable voltage that compensates drops and peaks.

The solution: voltage converters and charging converters with electrically isolated input and output voltage (PerfectPower DCDC 10 to DCDC 40 or PerfectCharge DC 08 to DC 40). The high-quality DC/DC converters can also be used for quick and gentle charging of supply batteries during the drive. PerfectCharge charging converters, given their enhanced output voltage of 14.2 volts, are the best choice for this purpose.

Dometic PerfectPower DCDC 06 / DCDC 12 / DCDC 24

3.16

Voltage converters

	DCDC 06	DCDC 12	DCDC 24
DCDC 06			
			
DCDC 12			
			
DCDC 24			
			
Input voltage	20 to 30 V DC		
No-load input current	8 mA	8 mA	8 mA
Nominal input current	5 A	10 A	18 A
Output voltage	13.8 V DC -10 %		
Nominal output current	6 A	12 A	24 A
Peak output current	10 A	18 A	30 A
Energy efficiency	up to 90 %	up to 90 %	up to 90 %
Dimensions (W x H x D)	105 x 47 x 118 mm	105 x 47 x 128 mm	105 x 47 x 158 mm
Weight	0.45 kg	0.5 kg	0.7 kg
Product	Ref. No.		
PerfectPower DCDC 06	9600000038		
PerfectPower DCDC 12	9600000039		
PerfectPower DCDC 24	9600000040		








The sine wave inverters in the SinePower DSP and DSP-T series generate a pure sine wave voltage, which is perfect even for sensitive 230-volt devices. Due to their large input voltage range, they are also fine for modern EURO 6 vehicles with smart alternators. The premium inverters in the SinePower DSP-T series offer two extra benefits: a mains priority circuit with voltage synchronisation and an energy-saving Smart Standby Mode.

Dometic SinePower DSP

3.16

Sine wave inverter

	DSP 212 / DSP 224	DSP 412 / DSP 424
<p>DSP 212 DSP 224</p>  <p>DSP 412 DSP 424</p> 	Input voltage	12 V DC (10 – 16.5 V) / 24 V DC (20 – 33 V)
	Output voltage / shape	230 V AC / pure sine wave 
	Output Frequency	50 Hz
	No-load current input	0.6 A / 0.4 A
	Continuous output	150 W
	Peak power	300 W
	Energy efficiency up to	90 %
	Dimensions (W x H x D)	127 x 52 x 210 mm
	Weight	1.1 kg
	Test mark	e-certified (Automotive EMC Directive)
Type of protection	equivalent to IP 21	
Product	Ref. No.	Ref. No. UK
Dometic SinePower DSP 212	9600002603	9600003593
Dometic SinePower DSP 224	9600002540	9600003594
Dometic SinePower DSP 412	9600002541	9600003595
Dometic SinePower DSP 424	9600002542	9600003596



CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION







[Sanitation](#)

[Cleaning Accessories](#)

Dometic SinePower DSP

3.16

Sine wave inverter

	DSP 612 / DSP 624	DSP 1012 / DSP 1024	
	Input voltage 12 V DC (10 – 16.5 V) / 24 V DC (20 – 33 V)		
	Output voltage / shape 230 V AC / pure sine wave 		
	Output Frequency 50 Hz	50 Hz	
	No-load current input <0.8 A / <0.5 A	1.0 A / 0.6 A	
	Standby current consumption 0.3 A / 0.2 A	0.35 A / 0.2 A	
	Continuous output 600 W	1000 W	
	Peak power 1200 W	2000 W	
	Energy efficiency up to 90%	90%	
	Dimensions (W x H x D) 230 x 80 x 220 mm	230 x 80 x 240 mm	
	Weight 2.8 kg	3.1 kg	
	Test mark e-certified (Automotive EMC Directive)		
	Type of protection equivalent to IP 21		
	DSP 1512 / DSP 1524	DSP 2012 / DSP 2024	
	Input voltage 12 V DC (10 – 16.5 V) / 24 V DC (20 – 33 V)		
	Output voltage / shape 230 V AC / pure sine wave 		
	Output Frequency 50 Hz	50 Hz	
	No-load current input <1.2 A / <0.6 A	<1.5 A / <0.8 A	
	Standby current consumption 0.4 A / 0.25 A	0.5 A / 0.3 A	
	Continuous output 1500 W	2000 W	
	Peak power 3000 W	4000 W	
	Energy efficiency up to 90%	90%	
	Dimensions (W x H x D) 272 x 97 x 340 mm	272 x 97 x 360 mm	
	Weight 4.9 kg	5.2 kg	
	Test mark e-certified (Automotive EMC Directive)		
	Type of protection equivalent to IP 21		
			
			
	Product	Ref. No.	Ref. No. UK
	Dometic SinePower DSP 612	9600002543	9600003597
	Dometic SinePower DSP 624	9600002544	9600003598
	Dometic SinePower DSP 1012	9600002545	9600003599
	Dometic SinePower DSP 1024	9600002546	9600003600
	Dometic SinePower DSP 1512	9600002547	9600003601
	Dometic SinePower DSP 1524	9600002548	9600003602
	Dometic SinePower DSP 2012	9600002549	9600003603
	Dometic SinePower DSP 2024	9600002550	9600003604
	/ Optional extras		
	DC connection cable (for DSP 612/624/1012/1024)	9600000268	
	DC connection cable DSP 1512, 12 V	9102700003	
	DC connection cable DSP 2012, 12 V	9600000269	
	DC connection cable DSP 1524/2024, 24 V	9600000268	
	Mains priority circuit VS-230	9600000324	

Dometic SinePower DSP-T

3.16

Comfort sine wave inverter

	DSP 1312T / DSP 1324T	DSP 1812T / DSP 1824T	
	Input voltage 12 V DC (10.5 – 16 V) 24 V DC (21 – 32 V)		
	Output voltage / shape 230 V AC / pure sine wave 		
	Output Frequency 50 / 60 Hz	50 / 60 Hz	
	No-load current input 2.5 A / 1.3 A	2.5 A / 1.3 A	
	Standby current consumption 0.2 A / 0.1 A	0.2 A / 0.1 A	
	Continuous output 1300* W	1800 W	
	Peak power 2400 W	3200 W	
	Energy efficiency up to 90%	90%	
	Dimensions (W x H x D) 284 x 118 x 405 mm	284 x 118 x 405 mm	
	Weight 4.8 kg	6.1 kg	
	Priority circuit Integrated mains priority circuit with voltage synchronisation		
	Test mark e-certified (Automotive EMC Directive)		
	Type of protection equivalent to IP 21		
			
	DSP 2312T / DSP 2324T	DSP 3512T / DSP 3524T	
	Input voltage 12 V DC (10.5 – 16 V) 24 V DC (21 – 32 V)		
	Output voltage / shape 230 V AC / pure sine wave 		
	Output Frequency 50 / 60 Hz	50 / 60 Hz	
	No-load current input 2.8 A / 1.4 A	3.6 A / 1.8 A	
	Standby current consumption 0.2 A / 0.15 A	0.2 A / 0.15 A	
	Continuous output 2300* W	3500* W	
	Peak power 4000 W	6000 W	
	Energy efficiency up to 90%	90%	
	Dimensions (W x H x D) 284 x 118 x 481 mm	324 x 122 x 490 mm	
	Weight 6.6 kg	10.9 kg	
	Priority circuit Integrated mains priority circuit with voltage synchronisation		
	Test mark e-certified (Automotive EMC Directive)		
	Type of protection equivalent to IP 21		
			
	Product	Ref. No.	Ref. No. UK
	Dometic SinePower DSP 1312T	9600002551	
	Dometic SinePower DSP 1324T	9600002552	9600005003
	Dometic SinePower DSP 1812T	9600002553	9600005004
	Dometic SinePower DSP 1824T	9600002554	9600005005
	Dometic SinePower DSP 2312T	9600002555	9600005006
	Dometic SinePower DSP 2324T	9600002556	9600005007
	Dometic SinePower DSP 3512T	9600002557	9600005008
	Dometic SinePower DSP 3524T	9600002558	
	/ Optional extras		
	DC connection cable (for DSP 1312T / DSP 1324T)	9600000268	
	DC connection cable (for DSP 1812T, 12 V)	9102700003	
	DC connection cable (for DSP 2312T, 12 V)	9600000269	
	DC connection cable (for DSP 3512T, 12 V)	on request	
	DC connection cable (for DSP 1824T/2324T/3524T, 24 V)	9600000268	
	Standard remote control DSP-RCT	9600002564	
	Convenience remote control DSP-EM	9600002565	

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

EVERYTHING UNDER CONTROL


All important parameters in view and easy to control

In our era of smart devices, we have grown accustomed to accessing critical information at a glance and controlling our environment at the touch of a finger. Dometic provides a wide range of user-friendly control panels connected to our products and systems.

Dometic DSP-EM

3.16



Monitoring and control device for DSP-T inverter and MCA charger

	Input voltage	9 – 35 V DC
	Power consumption in display mode in standby mode	170 mA 40 mA
	Dimensions (W x H x D)	150 x 110 x 23 mm
	Weight	0.15 kg
	Quality features	<ul style="list-style-type: none"> Versatile unit controls and monitors your DSP-T inverter and MCA charger Combine with battery sensor to view all relevant battery data Conveniently indicates values such as power and voltage in addition to standard functions Allows detailed customization of your inverter Combine with MCA charger to control all energy products with one panel
Product	Ref. No.	
Dometic DSP-EM	9600002565	

Dometic MPC 01

3.16

Intelligent battery management system with display and a battery sensor


 	Input voltage	8 – 16 V DC
	Power consumption in display mode in standby mode	150 mA 10 mA
	Dimensions incl. knob (W x H x D)	145 x 122 x 24.5 mm
	Quality features	CI bus interface, three additional battery sensors (accessory) can be connected
	Product	Ref. No.
Dometic MPC 01	9102500073	



The Dometic PLB40 lithium iron phosphate battery delivers mobile energy for power tools, electric coolers and other 12 V appliances. Lightweight and perfectly portable, it is ideal for off-grid applications.

Dometic PLB40

Portable lithium batterie

	Battery capacity	40 Ah/ 512 Wh
	Chemistry	Lithium Iron Phosphate (LiFePO4)
	Battery voltage	12.8 V DC
	DC output	15 A
	Continuous output	150 W (per 12 V connection)
	Dimensions (W x H x D)	197 x 257 x 197 mm
	Weight	7.54 kg
	Quality Features	Three-way charging via 12 V socket, solar panel or AC house power, Extremely lightweight, ergonomically designed stainless steel carry-handle, Built-in LCD screen, Suitable for the CFX3, CDF, CF series, Powerful battery cells provide 512 Wh of energy, 40 Ah
	Scope of delivery	40Ah Lithium ion Phosphate battery pack, 10Amp ACDC charger, DC cable extension with Cig plug & Anderson connector
	Test marks	IP class IP44
Product	Ref. No.	
Dometic PLB40, portable lithium battery, 40 Ah	9600012878	

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



DOMETIC GENERATORS

230 VOLTS - ANYTIME, ANYWHERE

Benefits

- Highly compact design
- High continuous output
- Suitable as a power source for Dometic air conditioners
- Remote control included
- TEC models: Auto start function for automatic battery recharging
- Petrol fuelled TEC models: variable speed, economical fuel consumption, low-noise operation



- T model and Diesel fuelled models: constant speed


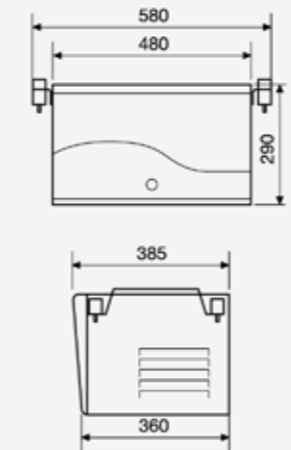


Dometic generators ensure a reliable power supply wherever mains power is unavailable. This makes them indispensable for everyone seeking maximum independence on the move. High performance, modest fuel consumption and excellent product quality are the features you can expect to find in every Dometic generator. The range includes models from 2000 to 6200 watts, fuelled with petrol or Diesel.

Dometic TEC 29

2.6 kW generator for 230 volts AC, fuelled by petrol

3.39

		TEC 29
 <p>TEC 29</p> 	Output voltage	230 V AC ±1 % (continuous)/pure sine wave ~
	Total distortion factor	1 %
	Frequency	50 Hz ±1 %
	Max. starting current	33 A
	Continuous output	2,600 W
	Peak power	2,900 W
	Engine output	4.0 (5.5) kW (PS)
	Operating mode/fuel	Normal unleaded ROZ 91 petrol
	Power consumption	max. 1.2 l/h
	Sound level at 7 metres	54–59 dBA
	Guaranteed sound level	86 dBA
	Dimensions (W x H x D)	480 x 290 x 385 mm
	Width with suspension	580 mm
	Housing finish	Stainless steel
	Weight	44 kg
Auto-start function	yes	
12-volt output for battery charging	yes	
Quality features	Automatic low-oil cut-off, electrical starter, short circuit protection, soundproofed operation via external control panel, alarm functions, variable generator speed	
Test marks	E13	
Product	Ref. No.	
Dometic TEC 29	9102900299	
/ Optional extras		
Plastic petrol tank with lock cap and fuel reserve float, 15 litres	9102900009	
Plastic petrol tank with supports and feed-mouth incorporated, 15 litres	9102900010	
20-litre stainless steel tank	9102900011	
Hose set	9102900003	
Flexible metal hose 25 mm, 2 m	9102900137	
Flexible metal hose 25 mm, 5 m	9102900138	

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

Dometic TEC 30EV / TEC 40D

2.5 kW or 3.6 kW generator for 230 volts AC fuelled by diesel

3.39

	TEC 30EV	TEC 40D
		
Output voltage	230 V AC ±1 % (continuous)/ pure sine wave	230 V AC ±1 % (continuous)/ pure sine wave
Total distortion factor	1%	5%
Frequency	50 Hz ±1 %	50 Hz ±1 %
Max. starting current	33 A	45 A
Continuous output	2,500 W	3,500 W
Peak power	2,900 W	3,900 W
Engine output	3.3 (4.5) kW (PS)	4.7 (6.4) kW (PS)
Operating mode/fuel	Diesel	Diesel
Power consumption	max. 0.7 l/h	max. 1.4 l
Sound level at 7 metres	60 dBA	64 dBA
Guaranteed sound level	84 dBA	89 dBA
Dimensions (W x H x D)	465 x 465 x 466 mm	765 x 457 x 467 mm
Width with suspension	572 mm	765 mm
Housing finish	Stainless steel	Stainless steel
Weight	70 kg	96.5 kg
Auto-start function	yes	yes
12-volt output for battery charging	yes	yes
Quality features	Automatic low-oil cut-off, electrical starter, short circuit protection, soundproofed operation via external control panel, alarm functions	
Test marks	E13	E24
Product	Ref. No.	
Dometic TEC 30EV	9102900033	
Dometic TEC 40D	9102900295	
/ Optional extras		
Plastic petrol tank with lock cap and fuel reserve float, 15 litres	9102900009	
Plastic petrol tank with supports and feed-mouth incorporated, 15 litres	9102900010	
20-litre stainless steel tank	9102900011	
Hose set	9102900003	
Flexible metal hose 25 mm, 2 m	9102900137	
Flexible metal hose 25 mm, 5 m	9102900138	
		
TEC 30EV Dimensions		
TEC 40D Dimensions		

Dometic T 4000H / T 5500H

3.5 kW or 4.5 kW generator for 230 volts AC fuelled by petrol

3.39

	T 4000H	T 5500H
		
Output voltage	230 V AC ±10 % (continuous)/ pure sine wave	230 V AC ±10 % (continuous)/ pure sine wave
Total distortion factor	5%	5%
Frequency	50 Hz ±8 %	50 Hz ±8 %
Max. starting current	16 A	32 A
Continuous output	3,500 W	4,500 W
Peak power	3,800 W	5,300 W
Engine output	4.6 kW (3000RPM)	6.4 kW (3000RPM)
Operating mode/fuel	Normal unleaded ROZ 91 petrol	Normal unleaded ROZ 91 petrol
Power consumption	max. 2.2 l/h	max. 3.0 l/h
Sound level at 7 metres	67 dBA	70 dBA
Guaranteed sound level	91 dBA	94 dBA
Dimensions (W x H x D)	660 x 335 x 475 mm	700 x 510 x 520 mm
Width with suspension	365 mm	538 mm
Housing finish	Powder coating	Powder coating
Weight	102 kg	132 kg
Auto-start function	no	no
12-volt output for battery charging	Option AG 111	Option AG 111
Quality features	<ul style="list-style-type: none"> Provides 230 V AC in remote locations where mains power is unavailable High performance – 3500 W continuous output Convenient 12 V output for battery charging Remote control included Stainless steel housing dampens operating sound 	<ul style="list-style-type: none"> Provides 230 V AC in remote locations where mains power is unavailable High performance – 4500 W continuous output Convenient 12 V output for battery charging Remote control included Stainless steel housing dampens operating sound Large 15 l fuel tank for up to 5 h operation
Test marks	E24	E24
Product	Ref. No.	
Dometic T 4000H	9102900006	
Dometic T 5500H	9102900037	
/ Optional extras		
Plastic petrol tank with lock cap and fuel reserve float, 15 litres	9102900009	
Plastic petrol tank with supports and feed-mouth incorporated, 15 litres	9102900010	
20-litre stainless steel tank	9102900011	
Hose set	9102900003	
Flexible metal hose 25 mm, 2 m	9102900137	
Flexible metal hose 25 mm, 5 m	9102900138	
		
T 4000H Dimensions		
T 5500H Dimensions		

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION



[Sanitation](#)

[Cleaning Accessories](#)

Dometic T 2500H

2.0 kW generator for 230 volts AC, fuelled by petrol

3.39




Output voltage	230 V AC ±10 % (continuous)/pure sine wave ~
Total distortion factor	5 %
Frequency	50 Hz ±5 %
Max. starting current	24 A
Continuous output	2,000 W
Peak power	2,200 W
Engine output	4.0 (5.5) kW (PS)
Operating mode / fuel	Normal unleaded ROZ 91 petrol
Power consumption	max. 1.2 l/h
Sound level at 7 metres	60 dBA
Guaranteed sound level	86 dBA
Dimensions (W x H x D)	530 x 290 x 385 mm
Width with suspension	640 mm
Housing finish	Stainless steel
Weight	50 kg
12-volt output for battery charging	yes, with optional charging regulator
Quality features	Automatic low-oil cut-off, electrical starter, short circuit protection, soundproofed operation via external control panel
Test marks	E3

Product	Ref. No.
Dometic T 2500H	9102900005
/ Optional extras	
Plastic petrol tank with lock cap and fuel reserve float, 15 litres	9102900009
Plastic petrol tank with supports and feed-mouth incorporated, 15 litres	9102900010
20-litre stainless steel tank	9102900011
Hose set	9102900003
Flexible metal hose 25 mm, 2 m	9102900137
Flexible metal hose 25 mm, 5 m	9102900138
Battery charging regulator	9102900014
Floor chimney	9102900023
Change-over switch (generator / mains)	9102900013

Dometic TEC 60EV

6.2 kW generator for 230 volts AC, fuelled by regular unleaded petrol

3.39



Output voltage	230 V AC ±1 % (continuous)/pure sine wave ~
Total distortion factor	< 3 %
Frequency	50 Hz ±1 %
Max. starting current	85 W
Continuous output	6,200 W
Peak power	6,500 W
Engine output	6,0 (8,9) kW (PS)
Operating mode / fuel	Normal unleaded ROZ 91 petrol
Power consumption	max. 3.7 l/h
Sound level at 7 metres	66 dBA
Guaranteed sound level	90 dBA
Dimensions (W x H x D)	626 x 474 x 544 mm
Housing finish	Stainless steel
Weight	112 kg
Auto-start function	•
12-volt output for battery charging	•
Quality features	Low-oil cut-off, electrical starter, overload and short-circuit protection, sound insulation, operation via external control panel, alarm functions, variable generator speed
Test marks	E13

Product	Ref. No.
Dometic TEC 60EV	9102900303
/ Optional extras	
Plastic petrol tank with lock cap and fuel reserve float, 15 litres	9102900009
Plastic petrol tank with supports and feed-mouth incorporated, 15 litres	9102900010
20-litre stainless steel tank	9102900011
Hose set	9102900003
Flexible metal hose 25 mm, 2 m	9102900137
Flexible metal hose 25 mm, 5 m	9102900138

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



ELECTRONIC ACCESSORIES

Accessories for coolers and refrigerators – cooling without compromise

No need to accept any restrictions in the use of your cooling box, even if you have a simple or older make. CoolPower accessories give you plenty of flexibility. You can run a 12-volt device from a 24-volt

battery or from a mains supply. You can also connect a clever device to prevent excessive battery drainage.

Dometic CoolPower M 50U

3.16



Battery monitor for universal 12 V applications

	Output voltage	12 V
	Output current	5 A
	Continuous power at 25°C	65 W
	Weight	0.12 kg
Product		Ref. No.
Dometic CoolPower M 50U		9600000446

Dometic CoolPower EPS 817 / EPS 100

3.16



Mains adapter, from 230 V to 12 / 24 V

	EPS 817	EPS 100	
	Input voltage	230 V AC / 50 Hz	230 V AC
	Output voltage	13 V DC	25 V DC
	Continuous load	6 A	–
	Battery voltage	12 V DC	12 / 24 V DC
	Dimensions (W x H x D)	115 x 64 x 170 mm	115 x 65 x 185 mm
	Weight	0.6 kg	0.7 kg
	Product	Ref. No.	Ref. No. UK
	Dometic CoolPower EPS 817	9600000439	9600027584
	Dometic CoolPower EPS 100	9600000440	9600027585

Dometic CoolPower MPS 35 / MPS 50 / MPS 80

3.16

Mains adapter, connects 24 V appliances to 110–240 V mains

	MPS 35	MPS 50	MPS 80	
	Input voltage	110 – 240 V AC	110 – 240 V AC	110 – 240 V AC
	Continuous power at 25 °C	110 W	150 W	252 W
	Output voltage	25 V DC	27 V DC	27 V DC
	Output current	3 A	6 A	9 A
	Battery voltage	12 / 24 V DC	12 / 24 V DC	12 / 24 V DC
	Dimensions (W x H x D)	115 x 55 x 160 mm	120 x 70 x 200 mm	120 x 70 x 200 mm
	Weight	0.7 kg	1 kg	1 kg
	Product	Ref. No.	Ref. No. UK	
	Dometic CoolPower MPS 35	9600000445	9600027582	
	Dometic CoolPower MPS 50	9600000441	9600027586	
	Dometic CoolPower MPS 80	9600000442	9600027587	

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)


SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

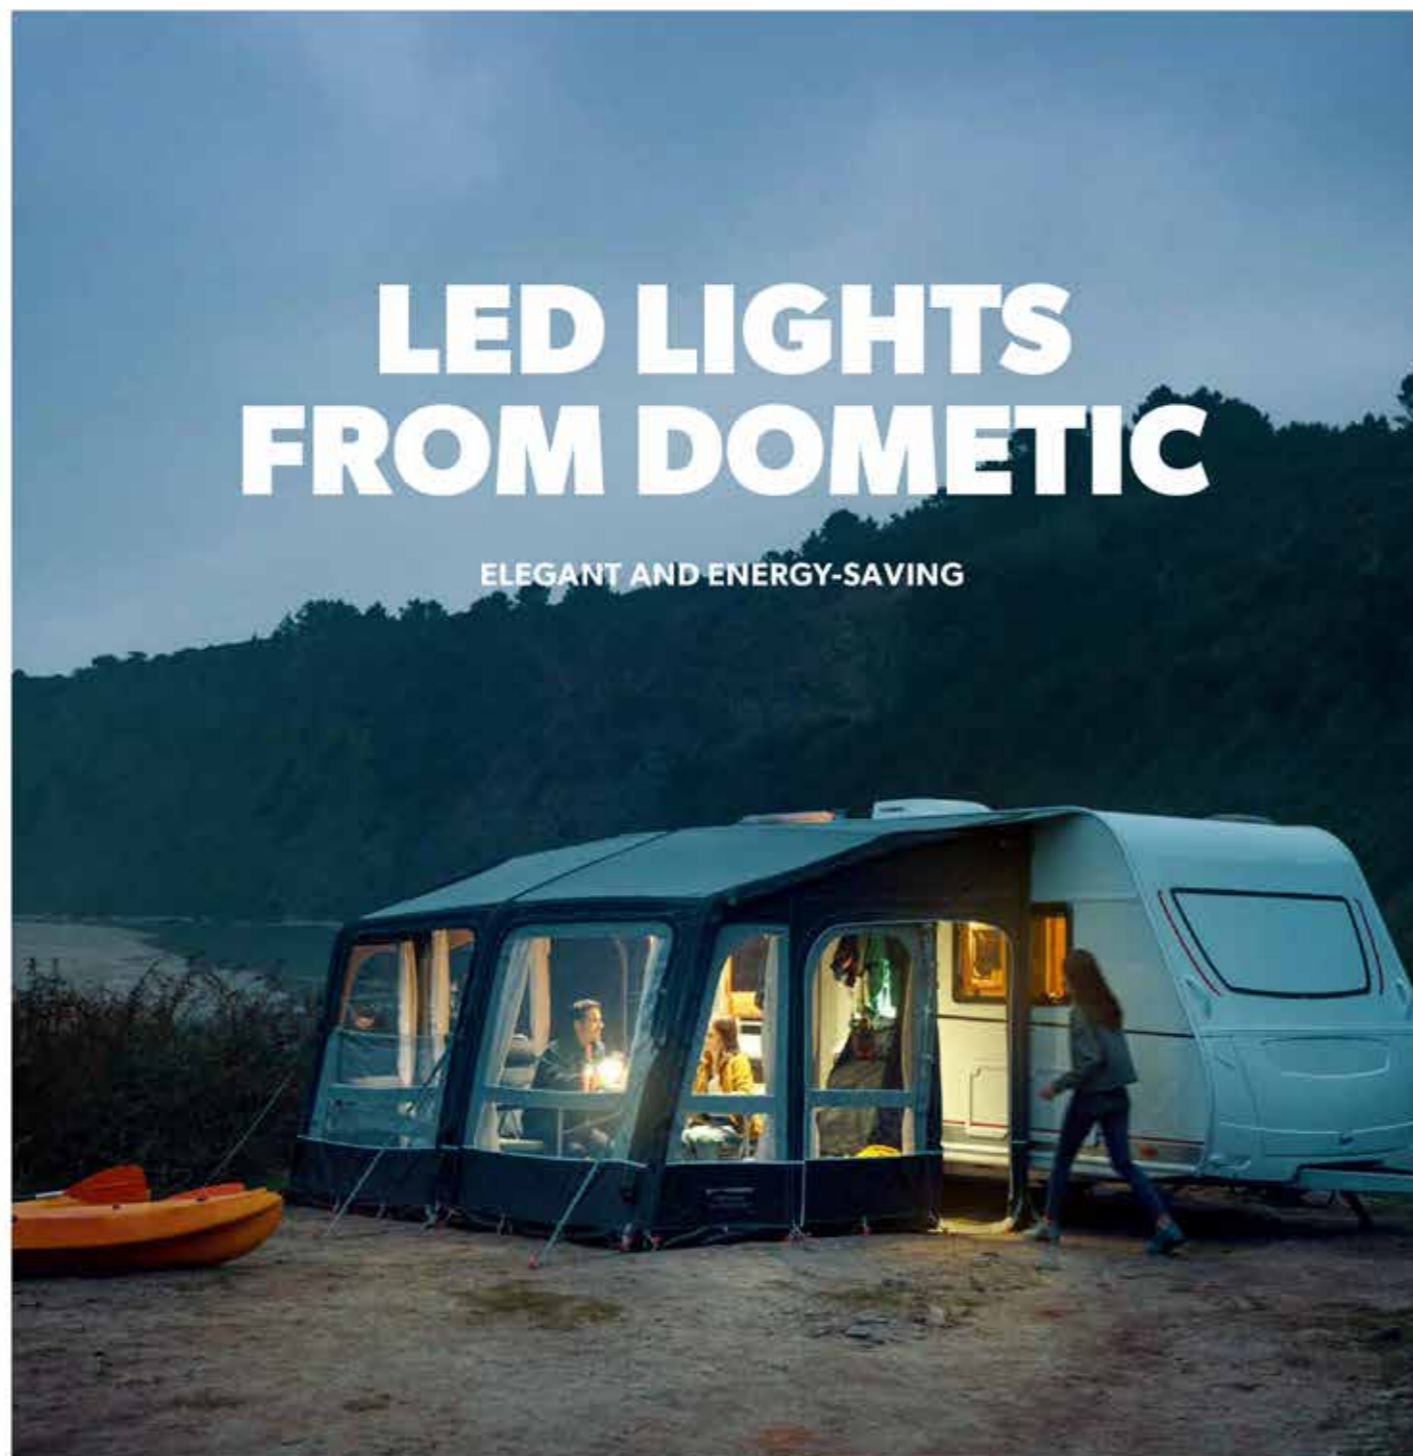

In close cooperation with leading vehicle manufacturers we have created attractive lighting solutions for motorhomes and caravans. Most of them are based on state-of-the-art LED technology, which saves up to 90 % energy compared to conventional halogen lamps and gives a much longer battery running time in off-mains operation.

The Dometic lighting range includes recessed spotlights for neat integration in ceilings and walls, surface-mounted spots that can be turned and swivelled to the optimal angle, and a collection of low-

profile LED modules in different shapes and sizes. From reading lamps and kitchen cabinet lighting to access lights and pleasant ambient lighting – our light designers have thought of everything.

This catalogue presents a small selection of our products for retrofitting. Pick what suits your idea of a perfectly illuminated vehicle, and get in touch if you want more inspiration.

Dometic L70TM

LED swan neck lamp with touch switch

3.35



Voltage	10 – 15 V DC
Power input	3 W + 0.2 W (night light)
Energy consumption in 1000 h	3 kWh
Energy class	A+
Luminous flux	160 lm
Lifetime	25000 h
Light colour	warm white (3000 K)
Material	metal
Dimensions	230 x 60 mm
Quality features	Includes blue night light. Ideal for bedroom and living areas. Elegant chrome looks, concealed screw fasteners.

Product	Ref. No.
L70TM	9106506321

Dometic L80TM

LED swan neck lamp

3.35



Voltage	10 – 15 V DC
Power input	2 W
Energy consumption in 1000 h	2 kWh
Energy class	A
Luminous flux	120 lm
Lifetime	30000 h
Light colour	warm white (3000 K)
Material	plastic/metal
Dimensions	Length: 372 mm, spot head: Ø 60 mm, base: Ø 58 mm
Quality features	From high-quality plastic material, pleasant to the touch. Lamp base integrates two USB charging ports (1 A and 2 A). Convenient touch sensor. Requires 18 W or more for simultaneous operation of light, 1 A and 2 A USB ports.

Product	Ref. No.
L80TM	9106506669

Dometic L100RM

Swivelling LED spot for recessed mounting

3.35



Voltage	12 V DC
Power input	1.4 W
Energy consumption in 1000 h	1.4 kWh
Energy class	A+
Luminous flux	90 lm
Lifetime	25000 h
Light colour	warm white (3000 K)
Material	aluminium/plastic
Dimensions	Ø 53 mm x 22 mm
Quality features	Precision turned, with optical lens. Trendy design. Dimmable.

Product	Ref. No.
L100RM	9106506655



CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION


[Sanitation](#)

[Cleaning Accessories](#)

Dometic DTO-03

DTO LED module


3.35

	Voltage	10 – 15 V DC
	Power input	3 W
	Energy consumption in 1000 h	3 kWh
	Energy class	A
	Luminous flux	140 lm
	Lifetime	50000 h
	Light colour	warm white (3000 K)
	Material	aluminium/metal
	Dimensions	100 x 100 x 5 mm
	Quality features	Extremely low profile. Very consistent light, dimmable. Supplied incl. adhesive pad and screw fasteners
Product		Ref. No.
DTO-03		9106506660

Dometic DTO-06

DTO LED module


3.35

	Voltage	10 – 15 V DC
	Power input	6 W
	Energy consumption in 1000 h	6 kWh
	Energy class	A
	Luminous flux	330 lm
	Lifetime	50000 h
	Light colour	warm white (3000 K)
	Material	aluminium/metal
	Dimensions	200 x 100 x 5 mm
	Quality features	Extremely low profile. Very consistent light, dimmable. Supplied incl. adhesive pad and screw fasteners
Product		Ref. No.
DTO-06		9106506661

Dometic DTO-01

DTO LED module


3.35

	Voltage	10 – 15 V DC
	Power input	2 W
	Energy consumption in 1000 h	2 kWh
	Energy class	A
	Luminous flux	100 lm
	Lifetime	50000 h
	Light colour	warm white (3000 K)
	Material	aluminium/metal
	Dimensions	100 mm per side x 5 mm
	Quality features	Extremely low profile. Very consistent light, dimmable. Supplied incl. adhesive pad and screw fasteners
Product		Ref. No.
DTO-01		9106506663

Dometic SMP301-07

Switching power supply for 12 V devices – with integrated battery charger


3.35

	Input/output	230 V AC / 12 V DC
	Charging current	15 A up to 12.7 V DC; 5 A from 12.8 V DC
	Maximum output	350 W
	Dimensions	250 x 210 x 60 mm
	Weight	1.2 kg
	Quality features	Supplies lights and other comfort devices with 12 V DC and recharges the batteries. Mains priority circuit gives priority to 230 V mains power as soon as it is available. Battery charger suitable for all types of lead batteries: lead-acid, gel, AGM, 5 electric circuits, Battery charger function: for all types of lead batteries up to 300 Ah
	Product	Ref. No.
SMP301-07	9106506667	

Dometic SMP 439A

25 Amp battery Charger for mobile homes

3.35

	Output current	25 A
	Output power	340 W
	Charging Characteristics	7 phase IU01
	AC Input	198 – 264 VAC , 50 Hz , sine-wave
	Quality features	Intelligent over temperature protection
Product		Ref. No.
SMP 439A		9106507194

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



DRIVING SUPPORT

Reversing video systems for recreational vehicles

Driving support for caravan, motorhome and campervan drivers – we have put together a complete range of smart solutions for safe and relaxed manoeuvring. Watchful cameras and high-resolution monitors with advanced AHD technology give drivers full control of what is happening around their vehicles.

Safety requirements differ depending on the type of vehicle and the way it is used. Dometic PerfectView cameras and monitors can be flexibly combined to suit specific demands. We also offer a variety of solutions to cover the most typical safety risks – e.g. a turn-assistant camera for large camper vehicles, a camera for the bike rack, and an all-around view system for safe manoeuvring of bulky vehicles.



CAMERAS

Professional cameras for combination with a Dometic monitor of your choice, or with an existing monitor. Smart special solutions: all-around view system, turn assistant camera, bike rack camera and more.



MONITORS

Monitors with 5" or 7" screens – all with advanced digital LCD technology for high-contrast images day and night. Ready for connection of up to four cameras for complex safety solutions.



ADAPTERS AND ACCESSORIES

Easy system configuration: A wide choice of adapters, control boxes and other smart accessories helps you create customized safety solutions for all types of vehicles.

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION



[Sanitation](#)

[Cleaning Accessories](#)



Dometic CAM200 / CAM200NAV

Bike rack camera



	Dimensions (W x H x D)	165 x 35 x 42 mm
	Operating voltage	10 to 16 V DC
	Power input	1 W
	Picture sensor	1/4" CMOS
	Resolution	307,000 pixels
	Picture angle	150° low position cam/ 120° high position cam
	Light sensitivity	0.1 Lux
	Video standard	NTSC
	Operating temperature	-20 to +65 °C
	Colour	black
	Vibration resistance	10 g
	Weight	250 g
	Brightness adjustment	electronic
	Type of protection	IP69k
	Test mark E-certificate	ECE R10
	Quality Features	<ul style="list-style-type: none"> Free sight to the rear even with loaded bike rack Mounting at rack without drilling
	Scope of delivery	Camera, system cable (spiral cable), connector grommet, manual, 2 camera modules with automatic switching fitting to up-/ downfolded rack
	Product	Ref. No.
	Dometic CAM200	9600049683
	Dometic CAM200NAV	9600049684

3.19

Dometic PerfectView CAM35 / CAM35NAV

Brake light console camera with NAV adapter, 150° diagonal

3.19





	Dimensions (W x H x D)	375 x 82 x 44 mm with console
	Operating voltage	11 to 16 V DC
	Power input	approx. 1 W
	Picture sensor	1/4" CMOS
	Resolution	345,000 pixels
	Picture angle	150° diagonal, h: approx. 95°, v: approx. 70°
	Light sensitivity	< 1.5 Lux
	Video standard	NTSC
	Operating temperature	-30 to +70 °C
	Colour	black
	Vibration resistance	10 g
	Weight	400 g
	Brightness adjustment	electronic
	Mirrored picture function	factory-preset
	Type of protection	IP 69K
	Test mark E-certificate	ECE R10
		
	Product	Ref. No.
	PerfectView CAM35 REAR	9102000134
	PerfectView CAM35 REAR NAV	9102000133
	PerfectView CAM35 REAR NAV without connection cable	9102000138
	PerfectView CAM35 TWIN NAV	9102000131
	PerfectView CAM35 TWIN NAV without connection cable	9102000137
	PerfectView CAM35 TWIN NAV2 without connection cable (for monitors with 1 A/V video input only)	9600006438
	Accessories	
	Far view camera, upgrade set for CAM 35	9102000135
	CAM35 10 m system cable	9600000137
	CAM35 15 m system cable	9600001662
	Adapter CAM35 2in1	9600005190



**Dometic PerfectView
CAM18 / CAM18W / CAM18NAV / CAM18WNAV**

3.19

Color ball camera, 140° diagonal

   	Dimensions (W x H x D)	84 x 58 x 44 mm (including holder)
	Operating voltage	11 to 16 V DC
	Power input	max. 1 W
	Picture sensor	1/3" CMOS
	Resolution	355,000 pixels
	Picture angle	140° diagonal h: approx. 90° v: approx. 70°
	Light sensitivity	< 1 Lux; 0 Lux with LED
	Video standard	PAL
	Operating temperature	-20 to +70 °C
	Colour	black / white
Vibration resistance	6 g	
Weight	100 g	
Brightness adjustment	electronic	
Mirrored picture function	can be set	
Type of protection	IP 69K	
Test mark	ECE R10	
Product	Ref. No.	
Dometic PerfectView CAM18	9600000053	
Dometic PerfectView CAM18W	9600000201	
Dometic PerfectView CAM18NAV	9600000054	
Dometic PerfectView CAM18WNAV	9600000104	
Dometic PerfectView CAM18 without connection cable	9102000110	

SAFETY ASSISTANT ON BOARD

Many panel vans, caravans and motorhomes just don't have a suitable mounting surface for a camera on the rear. This is where Dometic provides a smart alternative: a tiny cylinder camera enclosed in a compact housing to be fastened on the top edge of the vehicle's

rear. The 150° wide-angle lens can be vertically aligned as required for the best possible view. Its high sensitivity to light and electronic brightness adjustment ensure sharp images that are easily visible.

Two model versions – with console or for integration into an existing console





Two model versions are available. Both come with a factory preset mirrored picture function, which gives drivers the familiar rear mirror view. The CAM29S is integrated in a compact housing that can be easily fastened on the vehicle rear. Custom solution for panel vans

– ideal for tricky installation conditions. The CAM29 is designed for integration into an existing brake light console.

Dometic PerfectView CAM29/ CAM29S

3.19

Color cylinder camera

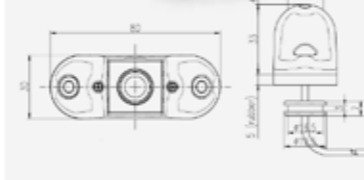	CAM29	CAM29S
   	Dimensions (W x H x D)	17 x 26 mm (Ø x T) / 76 x 29 x 33 mm
	Operating voltage	11 to 16 V DC
	Power input	approx. 1 W
	Picture sensor	1/4" CMOS
	Resolution	307,000 pixels
	Picture angle	150° diagonal, h: approx. 115°, v: approx. 90°
	Light sensitivity	< 1 Lux
	Video standard	NTSC
	Operating temperature	-20 to +70 °C
	Colour	black
Vibration resistance	10 g	
Weight	60 g	40 g
Brightness adjustment	electronic	
Mirrored picture function	factory-preset	
Type of protection	IP 69K	
Test mark	ECE R10	
Product	Ref. No.	
Dometic PerfectView CAM29	9600000203	
Dometic PerfectView CAM29S	9600000199	

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

Dometic PerfectView CAM44/ CAM44W / CAM44NAV/ CAM44WNAV

3.19

Color twin camera

CAM44/ CAM44NAV	Dimensions (W x H x D)	114 x 74 x 62 mm
	Operating voltage	12 to 16 volts DC
	Power input	1.2 W
	Picture sensor	1/3" CMOS (close range vision), 1/4" CMOS (long range vision)
	Resolution	290,000 pixels
	Picture angle	close range vision: 140° diagonal, h: approx. 100°, v: approx. 72° long range vision: 50° diagonal, h: approx. 35°, v: approx. 28°
	Light sensitivity	< 1 Lux; 0 with LED
	Video standard	PAL
	Operating temperature	-30 to 70 °C
	Colour	silver, white or black housing
	Vibration resistance	6 g
	Weight	360 g
	Brightness adjustment	electronic
	Mirrored picture function	factory-preset
	Type of protection	IP 68
	Test mark	E-certificate, ISO 16750
	Product	Ref. No.
	Dometic PerfectView CAM44, silver	960000043
	Dometic PerfectView CAM44W, white	9600000140
	Dometic PerfectView CAM44NAV, silver	9600000044
	Dometic PerfectView CAM44WNAV, white	9600000141
	Dometic PerfectView CAM44, black, without connection cable	9600011601

Dometic PerfectView CAM45/ CAM45NAV/ CAM45W/ CAM45WNAV

3.19





Small color camera

CAM45/ CAM45NAV	Dimensions (W x H x D)	78 x 60 x 50 mm
	Operating voltage	11 to 16 V DC
	Power input	1.5 W with heater
	Picture sensor	7/4" CCD
	Resolution	250,000 pixels
	Picture angle	120° diagonal, h: approx. 80°, v: approx. 65°
	Light sensitivity	< 1 Lux; 0 Lux with LED
	Video standard	PAL
	Operating temperature	-20 to +50 °C
	Colour	white or silver
	Vibration resistance	10 g
	Weight	200 g
	Brightness adjustment	electronic
	Mirrored picture function	can be set
	Type of protection	IP 69K
	Test mark	ECE R10, ISO 16750
	Product	Ref. No.
	Dometic PerfectView CAM45	9600000523
	Dometic PerfectView CAM45NAV	9600000525
	Dometic PerfectView CAM45W	9600000524
	Dometic PerfectView CAM45WNAV	9600000526
	Dometic PerfectView CAM45 without connection cable	9600008841

Dometic PerfectView CAM55 / CAM55NAV

3.19


Heavy-duty color camera, 120° diagonal

	Dimensions (W x H x D)	80 x 50 x 62 mm (including holder)
	Operating voltage	10 - 32 V DC
	Power input	max. 4.1 W with heater
	Picture sensor	1/4" CMOS
	Resolution	300,000 pixels
	Picture angle	120° diagonal, h: approx. 100°, v: approx. 70°
	Light sensitivity	< 1 Lux; 0 Lux with LED
	Video standard	PAL
	Operating temperature	-30 to +70 °C
	Colour	silver
	Vibration resistance	10 g
	Weight	165 g
	Brightness adjustment	electronic
	Mirrored picture function	can be set
	Type of protection	IP 69K
	Test mark E-certificate	ECE R10, ISO 16750
	Product	Ref. No.
	Dometic PerfectView CAM55	9600000555
	Dometic PerfectView CAM55NAV	9600000558

Dometic PerfectView CAM80AHD

3.19

Small color shutter AHD camera, 120° diagonal


	Dimensions (W x H x D)	106 x 68 x 54 mm (including holder)
	Operating voltage	11 to 16 V DC
	Power input	1.8 W with heater
	Picture sensor	1/2.9" CMOS
	Resolution	2,000,000 pixels
	Picture angle	125° diagonal, h: approx. 110°, v: approx. 60°
	Light sensitivity	< 0.5 Lux; 0 Lux with LED + motorized IR cut filter
	Video standard	PAL
	Operating temperature	-30 to +70 °C
	Colour	silver
	Vibration resistance	6 g
	Weight	350 g
	Brightness adjustment	electronic
	Mirrored picture function	can be set
Type of protection	IP 69K	
Test mark E-certificate	E-certificate, ISO 16750	
Product	Ref. No.	
Dometic PerfectView CAM80AHD	9600012923	

Note: To use the CAM 80 AHD, you need an AHD-capable monitor.

Dometic PerfectView CAM80CM / CAM80NAV / CAM80NTSC

3.19


Small color shutter camera, 145° diagonal

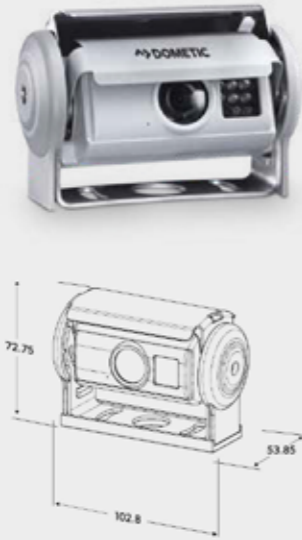	Dimensions (W x H x D)	106 x 68 x 54 mm (including holder)
	Operating voltage	11 to 16 V DC
	Power input	1.8 W with heater
	Picture sensor	1/3" CCD
	Resolution	270,000 pixels
	Picture angle	145° diagonal, h: approx. 100°, v: approx. 72°
	Light sensitivity	< 0.5 Lux; 0 Lux with LED
	Video standard	PAL / NTSC
	Operating temperature	-20 to +65 °C
	Colour	silver
	Vibration resistance	6 g
	Weight	350 g
	Brightness adjustment	electronic
	Mirrored picture function	can be set
Type of protection	IP 68	
Test mark E-certificate	ECE R10, ISO 16750	
Product	Ref. No.	
Dometic PerfectView CAM80CM	9600000049	
Dometic PerfectView CAM80NAV	9600000050	
Dometic PerfectView CAM80NTSC	9600000198	

Dometic PerfectView CAM360AHD

3.19

All-around view system with four cameras

	Dimensions (W x H x D)	50 x 33 x 27 mm
	Picture sensor	1/3" CMOS
	Resolution	1 Mio pixels
	Picture angle	180°
	Light sensitivity	0.1 Lux
	Video standard PAL	AHD/ NTSC switchable
	Operating temperature	-20 to +75 °C
	Colour	silver
	Vibration resistance	10 g
	Weight	70 g
	Brightness adjustment	electronic
	Type of protection	IP69k
	Test mark	E-certificate
	Quality features	Around view monitoring system with four cameras to create a 360° observation area around a vehicle. The system is equipped with a RCA connector (A/V) to fit to devices with an A/V input.
Product	Ref. No.	
Dometic PerfectView CAM360AHD	9600026540	
Accessory /		
Calibration set, 4 mats	9600000513	
Calibration set, 2 mats	9600028360	

Dometic CAM1000

3.19

Camera for turn assistant system

	Dimensions (W x H x D)	209 x 75 x 58 mm
	Operating voltage	12 to 32 V DC
	Power consumption	< 14 W with LED
	Picture sensor	1/3.2" CMOS
	Resolution	approx. 1 Mio pixels
	Picture angle	180° diagonal, 160° horizontal, 90° vertical
	Light sensitivity	0.1 LUX / 0 LUX with LED
	Video standard	NTSC
	Operating temperature	-30°C to +80°C
	Colour	grey
	Vibration resistance	10 g
	Weight	600 g
	Brightness adjustment	electronic
	Type of protection	IP69k
Test mark E-certificate	ECE R10, RED, ABE With type approval eligible for subsidy according to a recommendation of the German Federal Ministry of Transport and Digital Infrastructure (BMVI)	
Quality Features	<ul style="list-style-type: none"> Active detection of moving objects Video image of the related area Active indication (visual/ acoustic) Simple installation of one device only Indication of relevant objects only (moving) – very few failure indication 	
Product	Ref. No.	
Dometic CAM1000	9600026481	

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)

MONITORS

Super-flat monitors with brilliant image quality




Flat, compact and comfortable to use: Dometic PerfectView monitors are available in two different sizes – with 5" or 7" screen diagonals. Our models with state-of-the-art AHD video technology (Analogue High Definition) provide high-resolution images day and night.



Dometic PerfectView M55LAHD / M75LAHD

3.19



Digital 5" or 7" LCD monitor with AHD technology

	M55LAHD	M75LAHD
		
		
		
Dimensions (W x H x D)	146 x 87 x 26 mm	190 x 110 x 26 mm
Diagonal screen dimension	5"/127 mm	7"/178 mm
Operating voltage	11 to 30 V DC	11 to 30 V DC
Power input	8 W	8 W
Resolution	384,000 pixels, supporting AHD feature	600,000 pixels
Video standard	PAL/NTSC auto	PAL/NTSC auto
Operating temperature	-20 to +70 °C	-20 to +70 °C
Vibration resistance	6 g	6 g
Weight	350 g	400 g
Brightness	350 cd/m ²	up to 600 cd/m ²
Dimmer	automatic via LDR	automatic via LDR
Camera inputs	2 + 1 with signal recognition	2 + 1 with signal recognition
Mirrored picture function	can be set	can be set
Test mark	ECE R10, ISO 16750	ECE R10, ISO 16750
Quality features	Switches on automatically or manually, automatic day/night switching, normal or mirrored picture function, picture settings can be saved for each camera, loudspeaker, LED background illumination	
Product	Ref. No.	
Dometic PerfectView M55LAHD	9600012882	
Dometic PerfectView M75LAHD	9600012898	

Dometic PerfectView M71L

3.19

Digital 7" LCD monitor

	Dimensions (W x H x D)	175 x 126 x 26 mm
	Diagonal screen dimension	7"/178 mm (visible picture), 16:9
	Operating voltage	11 to 16 V DC
	Power input	8 W
	Resolution	384,000 pixels
	Video standard	PAL/NTSC auto
	Operating temperature	-20 to +70 °C
	Vibration resistance	5 g
	Weight	400 g
	Brightness	400 cd/m ²
	Camera inputs	3
	Mirrored picture function	can be set
	Test mark	ECE R10
	Quality features	<ul style="list-style-type: none"> Digital LCD technology with LED backlighting achieves top image quality – day and night! Automatic dimming function enhances comfort and convenience Four camera inputs, of which three cameras can be activated by external signals Image settings can be saved separately for each camera input Optional mirror function gives you a familiar rear mirror view
Product	Ref. No.	
Dometic PerfectView M71L	9600011060	

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



Dometic PerfectView VS400N

Video splitter to connect up to four cameras to a single monitor

	Quality features	<ul style="list-style-type: none"> Up to four camera images on a single monitor Automatic operation for ultimate ease of use Ideal for complex video applications
	Product	Ref. No.
Dometic PerfectView VS400	9600013958	


Dometic PerfectView AMP100

Control box to connect cameras to devices with RCA video input





	Quality features	<ul style="list-style-type: none"> Enhance your multi-media display with rear view functionality Perfect for retrofitting a rear view camera Automatic operation with reverse gear trigger input and video trigger output
	Produkt	Art.-Nr.
Dometic PerfectView AMP100	9600000210	

Dometic PerfectView SWITCH 300

Control box to connect up to three cameras to a single monitor

	Quality features	<ul style="list-style-type: none"> Up to three cameras on one monitor output for easy system upgrading Manual or automatic activation – the reversing camera via reverse gear, the side-mounted cameras via the indicator Suitable for 12 V and 24 V vehicle electrics
	Product	Ref. No.
Dometic PerfectView SWITCH 300	9600000067	

Dometic cables and adapters

SYSTEM AND EXTENSION CABLES, LIGHT-DUTY DESIGN	VIDEO CABLE FOR DOMETIC PERFECTVIEW CAMERAS	CAMERA/DISPLAY CABLE FOR NON-DOMETIC MONITORS AND NAVIGATION SYSTEMS	CAMERA ADAPTER FOR NAVIGATION SYSTEMS WITH RCA
			
<ul style="list-style-type: none"> 6-pin screw connector, water-proof Light-duty design 	<ul style="list-style-type: none"> Connection cable for universal use PerfectView accessory cable for moved applications (door joints) Compatible with all Dometic camera models 	<ul style="list-style-type: none"> For connecting Dometic PerfectView rear-view cameras to non-Dometic multimedia displays and navigation systems with RCA input Universal adaptor with nearly no restrictions Compatible with Dometic PerfectView camera models except Shutter cameras 	<ul style="list-style-type: none"> Plug-and-play connection of dome cameras for interior surveillance Cost-saving solution, simply use the monitor of an existing navigation system Tailor-made design – fits the RCA cinch input of navigation systems
Product	Ref. No.	Product	Ref. No.
5 m	9600000206	Video cable	9600026478
10 m	9600000207		
20 m	9600000208		
		Product	Ref. No.
		ADAPT5	9102200047
		RV-ADAPT-RCA	9103555990

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)



DOMETIC SANITATION SYSTEMS

Space-saving and easy to install

Dometic has been on board with renowned OEMs and vehicle outfitters for many years with its innovative sanitation systems. Today, we offer a hand-picked collection of toilets for a vast variety of applications – from motorhomes, caravans and campervans to mobile offices and horse trailers with living quarters. Well planned, space-saving concepts guarantee fast and hassle-free installation. High-quality, durable materials set new standards in terms of comfort and hygiene.

Whichever sanitation technology you prefer for your project, Dometic offers a state-of-the-art solution. You can use a compact portable model, or opt for a smart cassette toilet that easily adapts to even the most tricky bathroom layout with its 90° revolving seat.

Cleaning products such as vacuum cleaners, sweep inlet valves and practical tab cleaners for the waste holding tank add the finishing touch to our sanitation range.



TOILETS

Compact portable toilets with full-size seat and powerful push-button flush. Cassette toilets with 90° revolving seat and scratch-resistant ceramic inlay. Simply choose the toilet system to suit your project!

page 178 – 180



CLEANING ACCESSORIES

Get rid of that dirt with smart Dometic products: perfectly mobile wet/dry vacuum cleaner, neatly integrated central vacuum cleaning system, practical sweep inlet valve.

page 181 – 182



HYGIENE ACCESSORIES

Perfect hygiene for the smallest room on board: practical tab cleaners for the waste holding tank. Pre-dosed for convenient dosing. No mess, no excess!

page 183

DOMETIC

CLIMATE

[Air Condition](#)

[Awning](#)

[Window](#)

FOOD & BEVERAGE

[Coolers](#)

[Refrigeration](#)

[Cooking](#)

POWER & CONTROL

[Energy](#)

[Lighting](#)

SAFETY & SECURITY

[Driver Support](#)

HYGIENE & SANITATION

[Sanitation](#)

[Cleaning Accessories](#)





Homelike comfort in the smallest of space: the portable toilets in the Dometic 9-series are ideal for smaller vehicles due to their compact design and light weight. The easy-to-use push-button technology gives a powerful 360° pressure flush for effective cleaning and perfect

hygiene. A well-engineered disposal system, featuring an extra-long pivoting spout and vent openings, ensures clean and splash-free discharge. Available in two sizes – with a waste holding tank capacity of 9.8 or 18.9 litres.

Dometic 972 / 976

Portable toilet, white and grey

7.01

	972	976
		
Flush water tank capacity	8.7 litres	8.7 litres
Waste tank capacity	9.8 litres	18.9 litres
Material	ABS	ABS
Colour	White / grey	White / grey
Dimensions (W x H x D)	334 x 318 x 387 mm	334 x 387 x 387 mm
Weight	4.68 kg	5.00 kg
Quality features	<ul style="list-style-type: none"> High-strength ABS construction withstands harsh environments. Smooth, easy-to-clean finish. Prismatic tank level indicator allows easy tank level monitoring. Push-button flush clears bowl instantly. Full-size seat for comfort. Latching lid for security. 	
Product	Ref. No.	
Dometic 972	9108557679	
Dometic 976	9108557681	
/ Accessories for Dometic 970 series		
Dometic 970-FK, fixing kit for Dometic 970 series toilets	9108559158	
		




Our cassette toilets are a perfect fit for the tight bathrooms of motorhomes and caravans. Their seat or bowl, depending on the model, that can be turned by 90° in both directions as required by the room layout.

Two attractive series are available. Dometic Saneo® cassette toilets excel with unique details such as the patented Dual Close valve, the auto-closing lid, and the powerful impulse flush technology. The Dometic CT series comes with a scratch-resistant ceramic inlay that is easy to clean and makes the bowl 30% lighter than that of conventional all-ceramic toilets.

Dometic Saneo®

Revolving cassette toilet with ceramic inlay

7.01

	Waste holding tank capacity	16 litres
	Dimensions (W x H x D)	377 x 672 x 602 mm
	Weight	12.5 kg
	Quality features	<ul style="list-style-type: none"> Patented Dual Close valve provides maximum safety when the cassette tank has been removed. Bowl adjustable by 90° in both directions adds flexibility. Easy to clean ceramic inlay with effective impulse flushing system. Splash protection when opening the valve. Comfortable, ergonomically shaped seat. Self-closing lid and toilet seat. Insens Touch Control Display.
Product		Ref. No.
Dometic Saneo® CW, with flush water tank		9107100641
Dometic Saneo® CS, revolving cassette toilet with ceramic inlay		9107100640
/ Accessories		
Dometic Saneo-CASS, replacement cassette for Saneo toilets		242602283
Dometic SK 5, service hatch, 360 x 310 mm		9104100202

DOMETIC

CLIMATE

Air Condition

Awning

Window

FOOD & BEVERAGE

Coolers

Refrigeration

Cooking

POWER & CONTROL

Energy

Lighting

SAFETY & SECURITY

Driver Support

HYGIENE & SANITATION


Sanitation

Cleaning Accessories

Dometic CTS 4110

Cassette toilet with ceramic inlay


7.01

	Waste water tank capacity	19 litres
	Colour	White
	Dimensions (W x H x D)	382 x 672 x 530 mm
	Weight	12.0 kg
	Voltage	12 V DC
	Power input	max. 5 A for external pump
Quality features		
The scratch-resistant ceramic inlay that stays that way. It is 30% lighter than purely ceramic toilets. The optimised vacuum breaker increases flushing power. An anatomically respectful design. Seat adjustable by up to 90° in both directions to accommodate space. Simple and accessible control panel.		
Product		Ref. No.
Dometic CTS 4110		9107100630
/ Accessories		
Dometic CT4110-CASS, Replacement cassette for 4110 toilets		4448301678
Dometic SK 5, Service Hatch, 360 x 310 mm		9104100202

Dometic CTW 4110

Cassette toilet with ceramic inlay and integrated flush water tank

7.01

	Waste water tank capacity	19 litres
	Flush water tank capacity	7 litres
	Colour	White
	Dimensions (W x H x D)	382 x 672 x 530 mm
	Weight	12.5 kg
	Voltage	12 V DC
Power input		
max. 5 A for external pump		
Quality features		
The scratch-resistant ceramic inlay is also easy to clean. It is 30% lighter than purely ceramic toilets. The optimised vacuum breaker increases flushing power. An anatomically respectful design. Seat adjustable by up to 90° in both directions to accommodate space. Simple and accessible control panel. Integrated flush tank (7 l)		
Product		Ref. No.
Dometic CTW 4110		9107100629
/ Accessories		
Dometic CT4110-CASS, Replacement cassette for 4110 toilets		4448301678
Dometic SK 5, Service Hatch, 360 x 310 mm		9104100202

Dometic Renew Kit

Replacement set for CT 4000 series toilet

7.01

	Revitalise Dometic CT 4000 series toilets with this easy to change replacement set.	
	<ul style="list-style-type: none"> • Easy to change replacements for all vital parts of Dometic CT 4000 toilets • Provides a clean, hygienic toilet and peace of mind • Low-cost solution for customers wishing to avoid buying a new toilet 	
	Product	Ref. No.
Dometic Renew Kit		9600000458



CLEANING ACCESSORIES

Smart products that make cleaning a pleasure


Dometic has put together a complete range of products that makes cleaning a pleasure – with sparkling results! It includes a cordless, battery powered wet/dry vacuum cleaner that reaches every corner of the vehicle and a neatly integrated central vacuum cleaning system. Plus, a collection of specially formulated tab cleaners for the waste holding tank.

All of these products let your customers enjoy their journey in nice and neat surroundings, and maintain the value of their precious equipment for many years to come.

Dometic PowerVac PV 100

Vacuum cleaner


7.04

	Motor	12 V DC, 28,000 rpm
	Battery	12 V DC, 2.6 Ah
	Operating time	up to 18 min ±10%
	Recharge time	10–14 h (automatic switch-off)
	Operating temperature	0°C to +40°C
	Power input	approx. 90 watts
	Vacuumping performance	approx. 400 mm water column (±10%)
	Capacity	3.8 litres
	Dimensions (W x H x D)	270 x 320 x 198 mm
	Weight	2.10 kg
Quality Features		
Convenient battery vacuum cleaner for use in vehicles or at home. Maximum mobility with a rechargeable 12 V battery. This vacuum cleaner cleans wet or dry dirt. Can be recharged from 12 and 230 V. Easy to clean dust container and fabric filter.		
Scope of delivery		
Vacuum cleaner, hose, attachments for upholstery, rugs and narrow gaps, carrying strap, mains adapter, 12-volt charging cable, operating instructions		
Product		Ref. No.
Dometic PowerVac PV 100		9600000348

Dometic CV 1004

Vacuum cleaner system


7.04

	Power Input	1050 W
	Input voltage	230 V
	Suction power	2500 mm (water column)
	Dimensions (W x H x D)	298 x 171 x 175 mm
Quality Features	Compact dimensions allow integration into available cavities, saving valuable space. Powerful enough to extract tough dirt from every nook and cranny. Automatic on and off upon hose engagement or disengagement saves space, too. Long hose (12 m) and two ports ensure no dirt or dust can escape your reach. Compact vacuum unit dimensions conserve space. Upgrades with Dometic VacPort, an uptake port for swept-up floor dust and dirt.	
Product	Ref. No.	
Dometic CV 1004	9103501126	
/ Accessories		
Vacuum cleaner bags for CV 1004 (5 pieces)	9103501128	

Dometic VacPort

Sweep inlet valve


7.04

	Quality Features	Automatic ON/OFF, integral LED lighting, fixing-material included. Integrates into Dometic systems CV 1004 and CV 2004.
	Product	Ref. No.
Dometic VacPort	9103501127	

Dometic Brush & Stow

Toilet cleaning brush

7.03

	Quality Features	<ul style="list-style-type: none"> Small brush head – custom designed for compact travel toilets Wall mounted container for a secure hold during the journey Push-release for non-contact brush head replacement
	Product	Ref. No.
	Dometic Brush & Stow	9600005999
Dometic Brush & Stow spare brush set	9600010209	

TOILET TANK CARE

Pre-dosed tabs for convenient handling – no mess, no excess


Standard sanitation fluids add unnecessary weight onboard, and it's easy to spill or use too much. Our highly effective sanitation tabs are much lighter than a bottle and take up minimal storage space. The hands stay clean and there is no more experimenting as the optimum amount always ends up in the tank rather than on your hands or the floor.

Highly-effective tab cleaners for the waste holding tank break down waste into liquid and prevent unpleasant odours – available in a blue or green version. The Dometic tank cleaner effectively removes deposits, prevents scaling and gives a pleasant odour.

Dometic PowerCare Tabs

7.03


Sanitation additive for waste holding tanks, 16 tabs

	Quality Features	<ul style="list-style-type: none"> No spills or mess The dose is pre-measured so no possible overdosing and waste Easy storage in a handy tub
	Product	Ref. No.
Dometic PowerCare Tabs	9600000125	

Dometic GreenCare Tabs

7.03


Sanitation additive for waste holding tanks, 16 tabs

	Quality Features	<ul style="list-style-type: none"> An environmentally friendly toilet tab that doesn't cost the earth The dose is pre-measured – which prevents using too much and causing wastage No spills or mess
	Product	Ref. No.
Dometic GreenCare Tabs	9600000133	

Dometic tank cleaner

7.03

Tank cleaner for waste holding tanks, 10 tabs

	Quality Features	<ul style="list-style-type: none"> Easy and economical dosing with tabs Effortless cleaning with active foam Gentle on the environment
	Product	Ref. No.
Dometic tank cleaner	9600000150	

